



## Description


The RD625 LED series remote display can be used in applications where tank level must be displayed in remote locations up to 2000' away from the OEL8000III controller. RD625 is available for multiple tanks with individual displays for each tank. The RD625 comes standard in a NEMA 4x enclosure to allow it to be mounted outdoors.

This remote display can be customized with individual LED lights for alarm indications as well as an audible horn. Consult factory for pricing and part numbers.


Specifications	
Power Input	120VAC
Weight and Dimensions	10lbs. (W) 9" x (H) 10" x (D) 6.25"
Enclosure	TYPE 4X
Operating Temperature	0° to 50° C
Display	6 digit, 0.56" red LED sunlight readable display for tank volume
Input	DB-485 from OEL8000III
Wire	3 wire 22 awg shielded cable (comes with 10' wire and 9 pin connector)

*Specifications subject to change without notice, verify with manufacturer.*


**Remote Display**  
**Part No. RD625 Series**

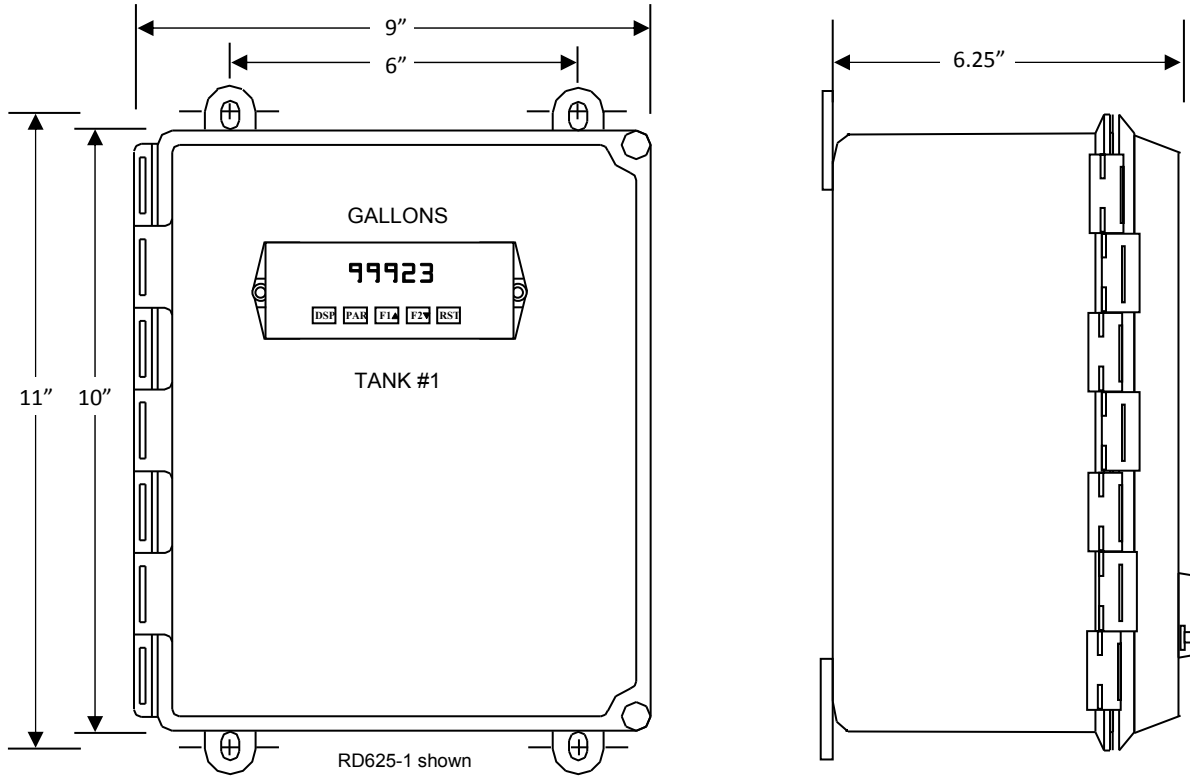


**Wiring from RD625-\* to OEL8000IIIK/X DB-485**

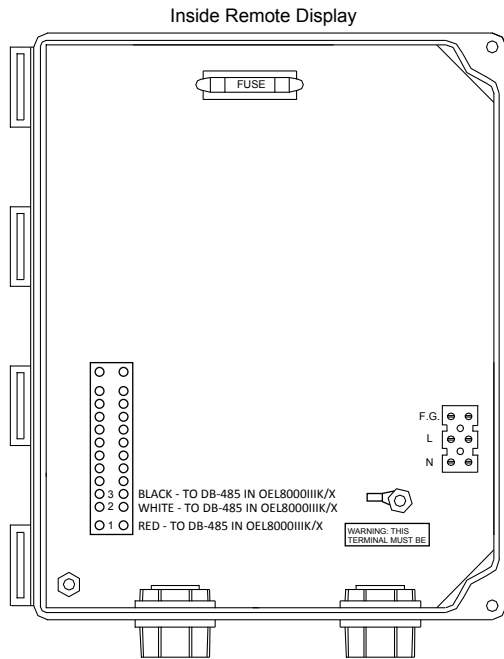

**OMNTEC**  
 2420 Pond Road  
 Ronkonkoma, NY 11779  
 +1.631.981.2001  
 +1.631.981.2007  
 omntec@omntec.com  
 www.omntec.com

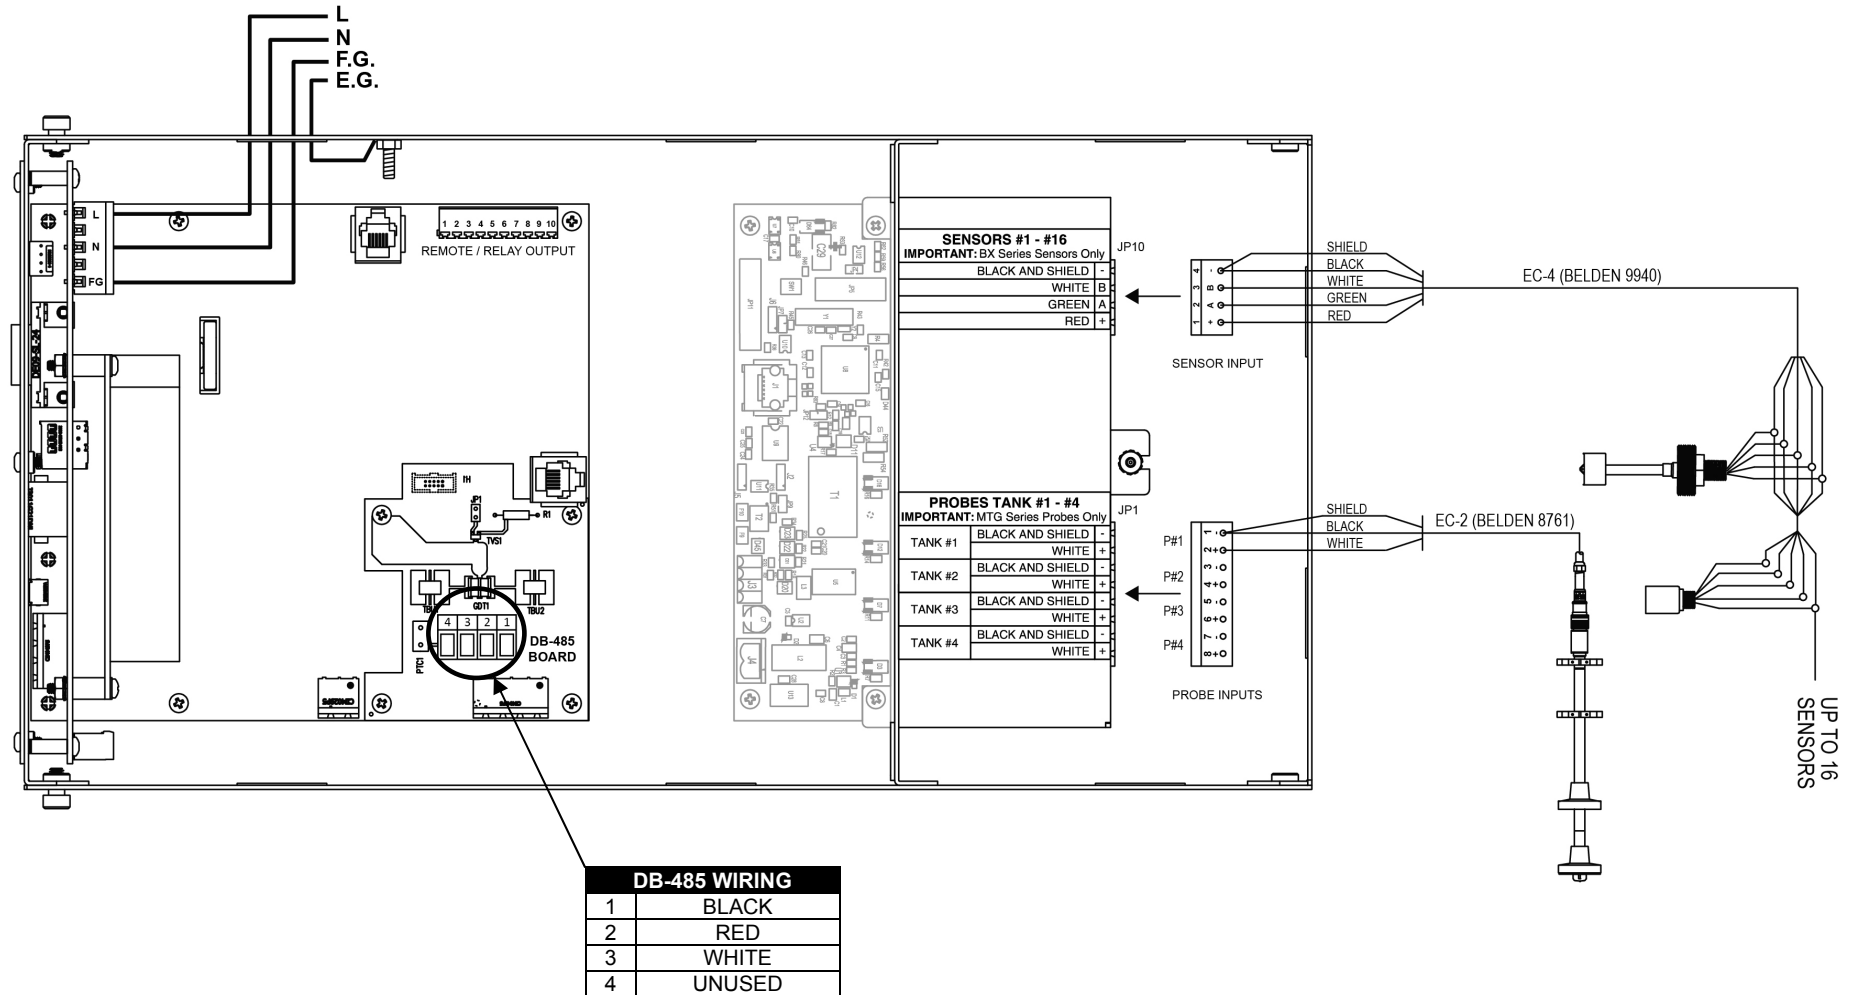

\*\*\*DB-485 board is an optional accessory that must be added to OEL8000IIIK consoles\*\*\*

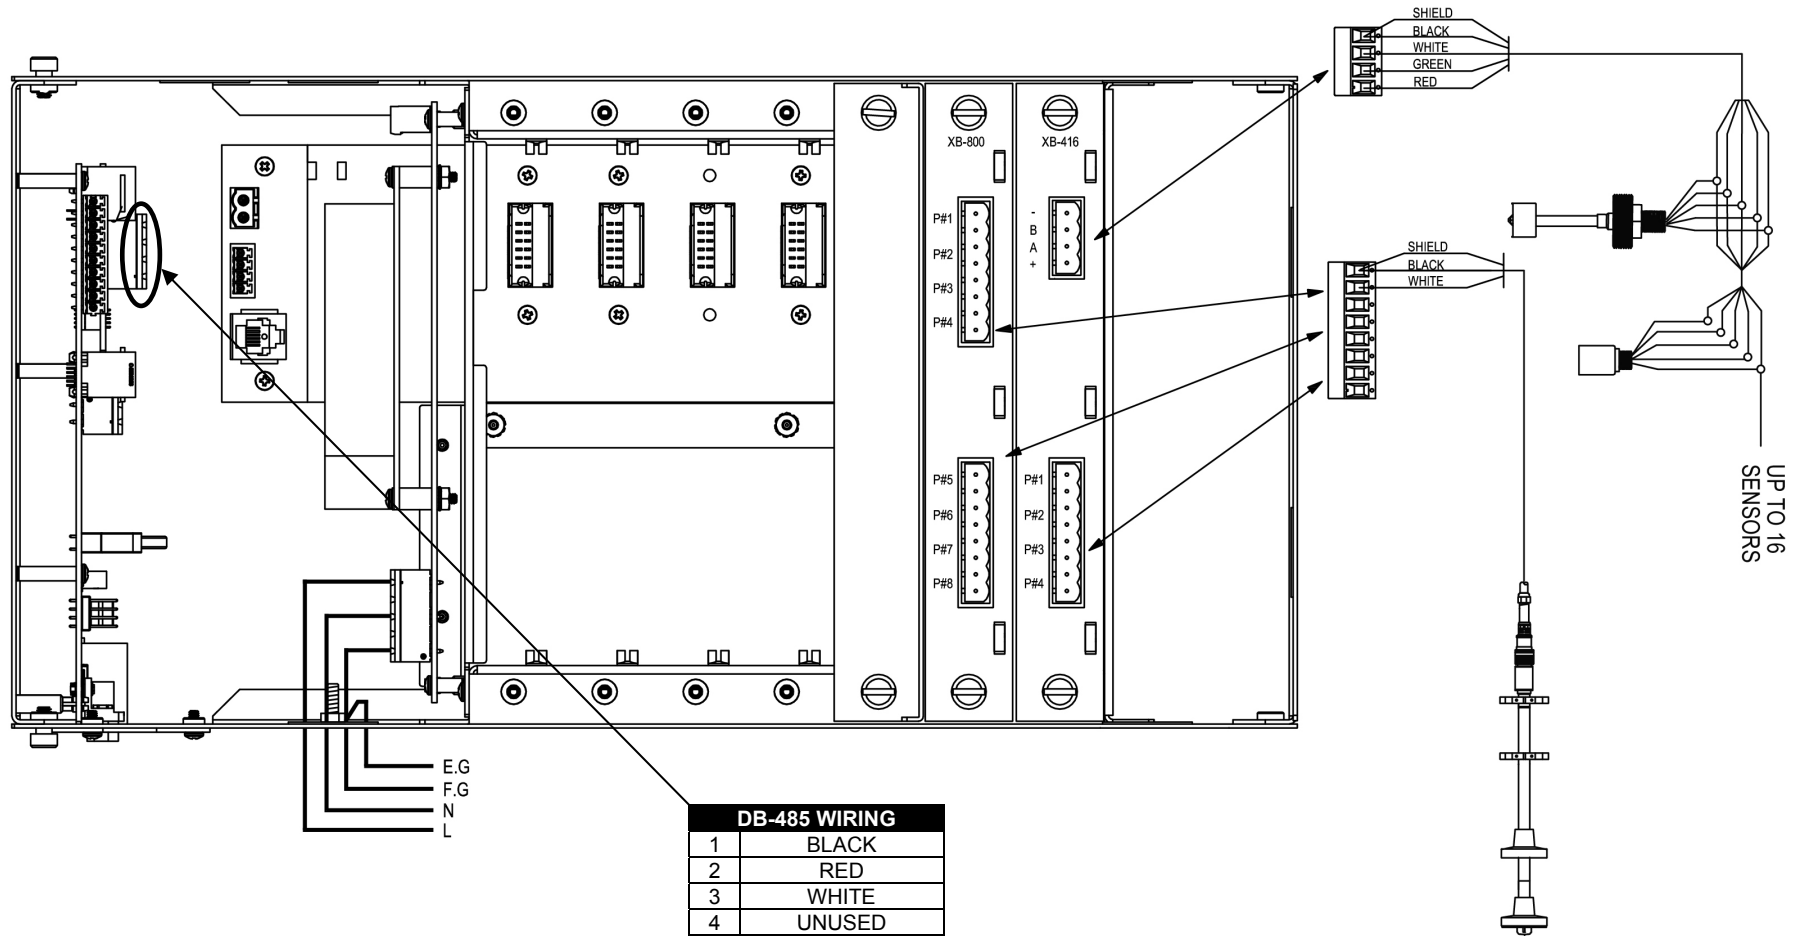

\*\*\*DB-485 board comes standard with OEL8000IIX consoles\*\*\*