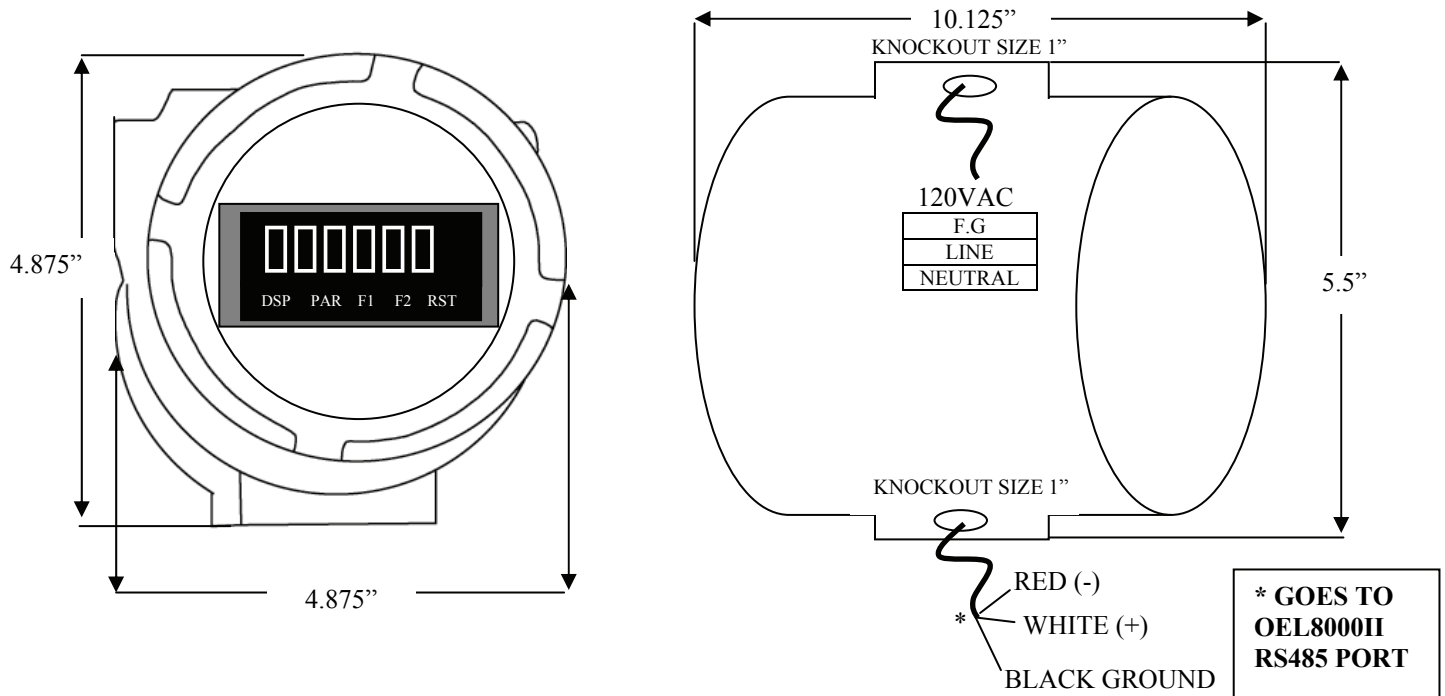


EXPLOSION PROOF REMOTE DISPLAY**SPECIFICATIONS****POWER INPUT**

120 volt AC

OPERATING TEMPERATURE

0 to 50 deg. C

WEIGHT

10 Pounds

ENCLOSURECLASS I GROUP B,CD, CLASS II
GROUP E,F,G CLASS III TYPE 4**DISPLAY**6 digit, .56" red LED sunlight
readable display for tank volume**INPUT**

RS-485 from OEL8000II

WIRE3 wire 22 awg shielded cable (comes
with 10' wire and 9 pin connector)

*** GOES TO
OEL8000II
RS485 PORT**

* Cable runs from OEL8000II to RD625 not to exceed 2000 ft.

** Should not be used as a means of overfill protection

