


# OMNTEC

# RD625-3-H

## Audio/ Visual Alarm Controller and Digital Display

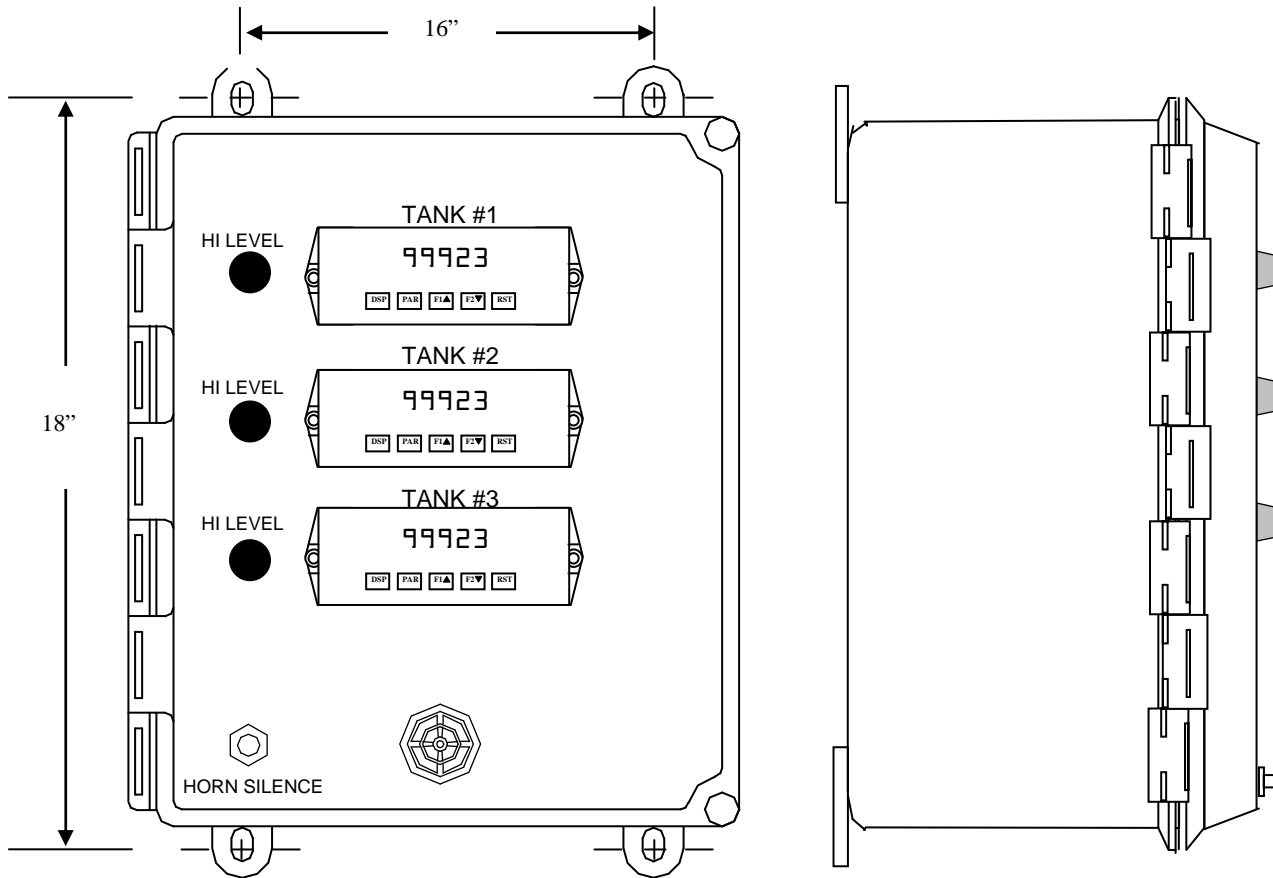

### SPECIFICATIONS

#### **POWER INPUT**

12VDC from IB-RB2-SP  
120 volt AC

#### **OPERATING TEMPERATURE**

0 to 50 deg. C

#### **WEIGHT**

10 Pounds

#### **DIMENSIONS**

(w) 16" x (h) 18"

#### **ENCLOSURE**

TYPE 4X

#### **DISPLAY**

6 Digit LED Digital Display for Tank Volume

#### **INPUT**

RS-485 Remote Display  
IB-RAS Hi Levels


#### **AUDIO /VISUAL**

**RED LED** - Indicates hi level alarm

**AUDIBLE ALARM** - 95 dB pulsing horn  
with 30 second timeout

**HORN SILENCE BUTTON** - Silences the  
audible alarm when pressed

Wiring from RD625-3-H

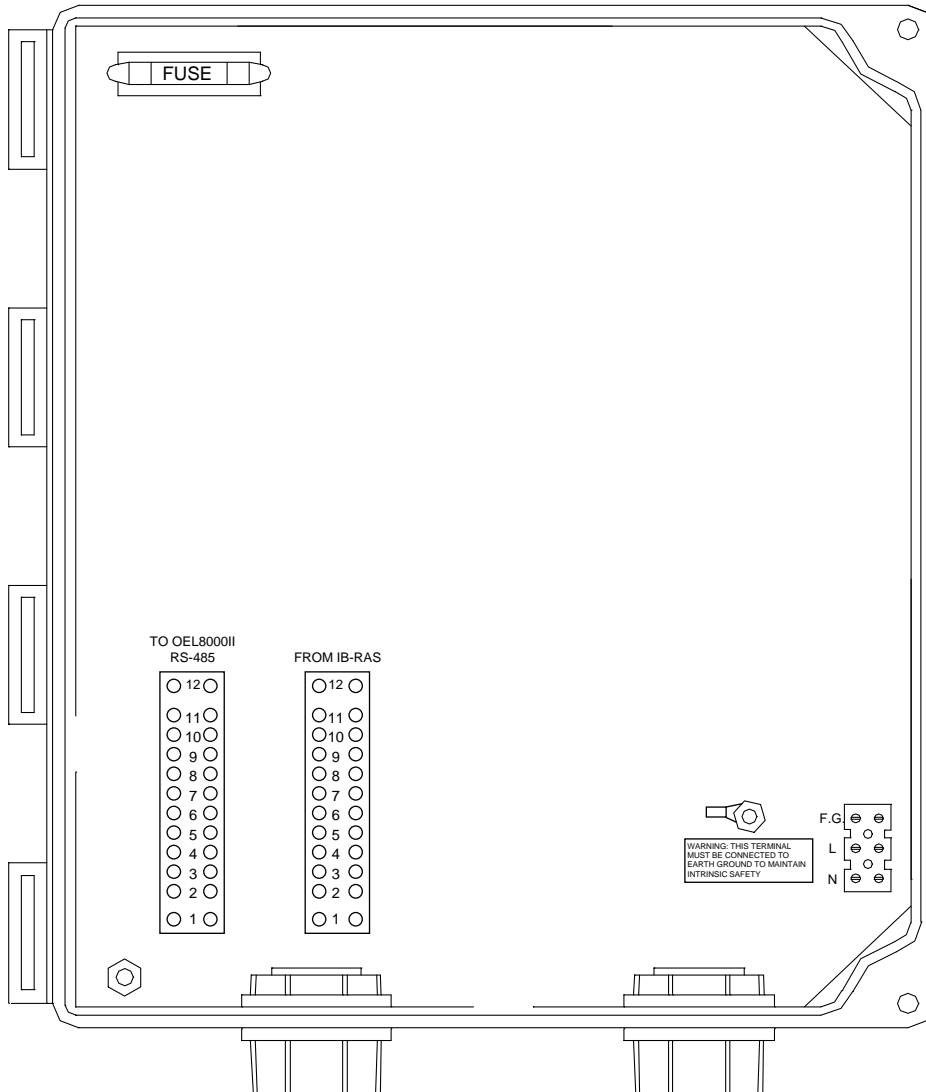

OEL8000II to RS-485	
12	
11	
10	
9	
8	
7	
6	
5	
4	
3	BLACK
2	WHITE
1	RED

From IB-RAS		
12		
11		
10		
9		
8		
7	ORANGE	HI LEVEL TANK #3
6	BROWN	HI LEVEL TANK #2
5	WHITE	HI LEVEL TANK #1
4	GREEN	- HORN
3	BLUE	HORN ACK
2	BLACK	(-) GROUND
1	RED	(+) 12 VDC

