


OMNTEC

RD625-4-H

Audio/ Visual Alarm Controller and Digital Display

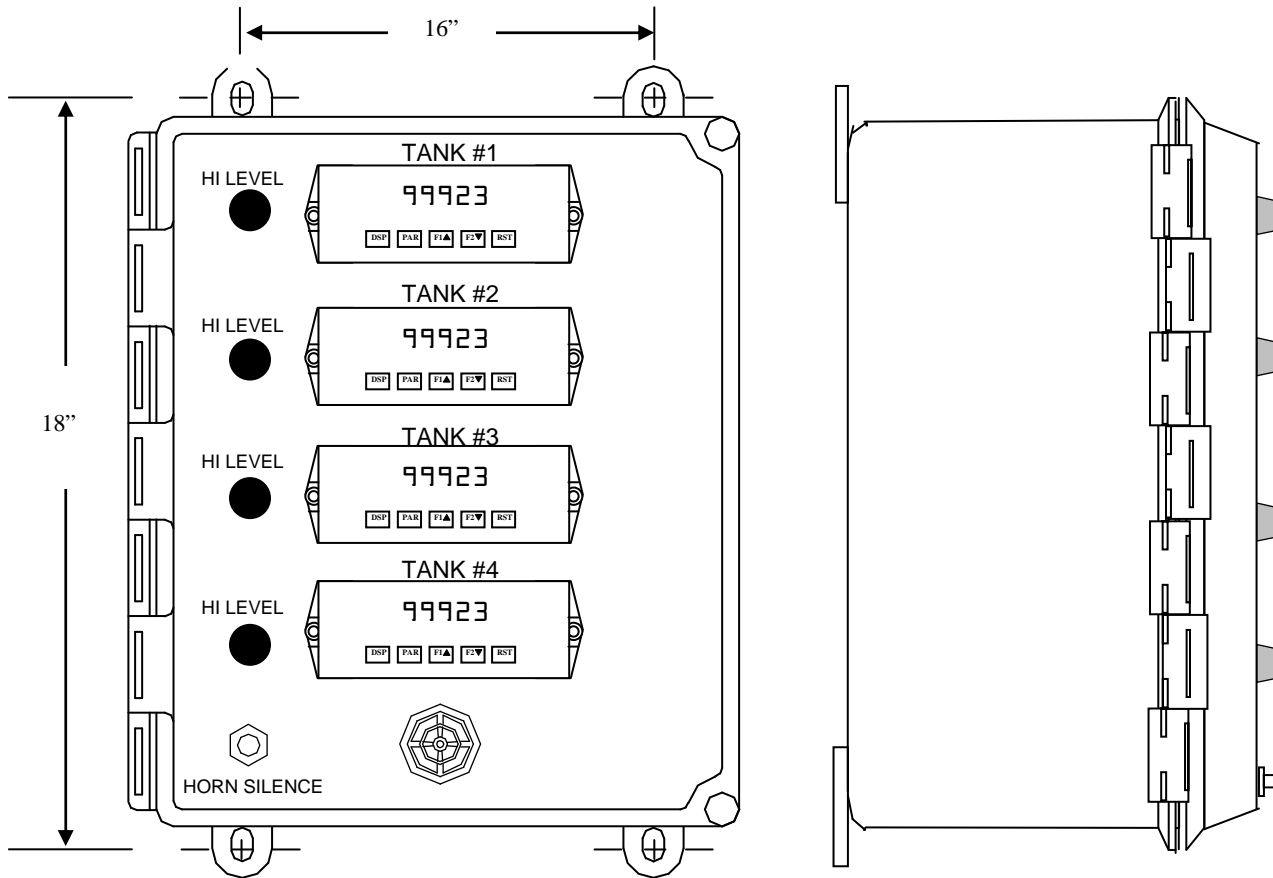

SPECIFICATIONS

POWER INPUT

12VDC from IB-RB2-SP
120 volt AC

OPERATING TEMPERATURE

0 to 50 deg. C

WEIGHT

10 Pounds

DIMENSIONS

(w) 16" x (h) 18"

ENCLOSURE

TYPE 4X

DISPLAY

6 Digit LED Digital Display for Tank Volume

INPUT

RS-485 Remote Display
IB-RAS Hi Levels


AUDIO /VISUAL

RED LED - Indicates hi level alarm

AUDIBLE ALARM - 95 dB pulsing horn
with 30 second timeout

HORN SILENCE BUTTON - Silences the
audible alarm when pressed

Wiring from RD625-4-H

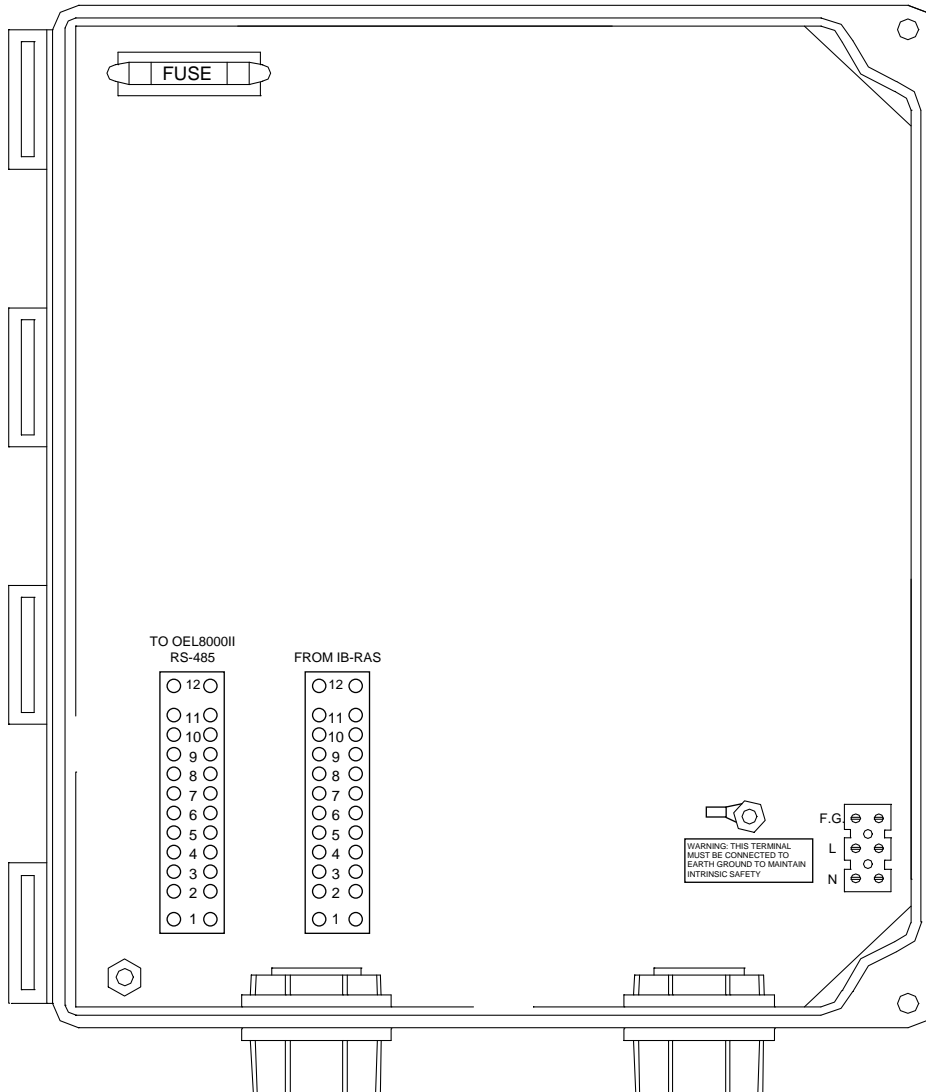

OEL8000II to RS-485	
12	
11	
10	
9	
8	
7	
6	
5	
4	
3	BLACK
2	WHITE
1	RED

From IB-RAS		
12		
11		
10		
9		
8	YELLOW	HI LEVEL TANK #4
7	ORANGE	HI LEVEL TANK #3
6	BROWN	HI LEVEL TANK #2
5	WHITE	HI LEVEL TANK #1
4	GREEN	- HORN
3	BLUE	HORN ACK
2	BLACK	(-) GROUND
1	RED	(+) 12 VDC

