


FEATURES

Unique tangle free swivel fitting No more fighting with heavy hoses, no matter what angle the nailer is being held.

Rapid fire trigger valve Fastest medium crown stapler in the market. It drives 15 staples per second



Trigger lock for safety

Adjustable depth control

Heavy duty rafter hook



•Quick and easy jam clearing by front latch



APPLICATIONS

●Sheathing ●Pallets ●Subflooring ●Vynil siding ●Roof decking ●Fumiture frames ●Crate & Box assembly	AITEIGATIONS					
Roof decking •Fumiture frames •Crate & Box assembly	 Sheathing 	 Pallets 	●Subflooring	●Vynil siding		
	●Roof decking ●Furr		niture frames	 Crate & Box assembly 		

TOOL SPECIFICATIONS			
MODEL	TA551B/16-11		
WEIGHT	5.5 lbs		
DIMENSIONS	11 - 3/8"(H) x 3-1/4"(W) x 14"(L)		
LOAD CAPACITY	157 nails		
OPERATING PRESSURE	70 - 100 psi (Regulator)		
AIR CONSUMPTION	0.039 ft ³ / cycle (90psi operating pressure)		

The specifications and design of the products in this catalog will be subject to change without advance notice due to our continuous efforts to improve the quality of our products.

MAXUSACORP


257 East 2nd Street Mineola, NY 11501 TEL: 800-223-4293 FAX: 516-741-3272 www.maxusacorp.com



It prevents foreign substances from entering the tool. Internal parts last longer and the inside of the tool is kept clean. The filter has a selfcleaning feature; foreign substances are ejected automatically from the tool when the air hose is disconnected.



Self-cleaning feature




Newly designed 3 tooth driver blade



The center tooth of the driver blade push the center part of the crown of each staple and the side tooth holds it to prevent jamming when it drives. The groove of the driver blade holds each staple firmly and prevents the stapler from slipping.



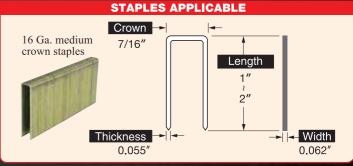

Dealer

