


MADE IN ITALY



A POWERFUL DEVICE FOR A BETTER AIR QUALITY



archiproducts


DESIGN AWARDS

—
WINNER 2020

DESIGNED AND MADE IN BERGAMO

VAIRUS^{AIR}

CLEANING
DISINFECTION
DEODORIZATION

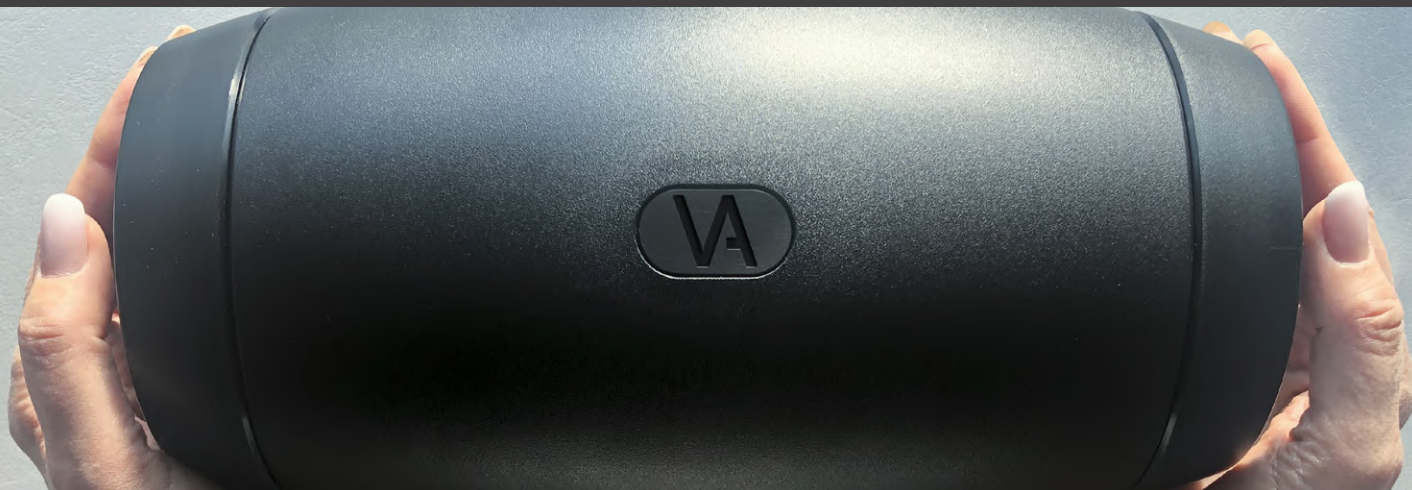

VAIRUS AIR is an innovative photocatalytic oxidative air purification system which occurs through the combination of Titanium Dioxide, photo-active and UV-A LED and whose use can be continuous and also in the presence of people, being a completely harmless system.


VAIRUS AIR was created to break down harmful volatile substances present in the air, increasing the well-being in the places where we stay. Through this “smart” device, in versions equipped with sensors, air quality can also be monitored remotely with 4.0 connectivity through the CASAMBI APP.

The device, designed and manufactured by us with a compact and sophisticated design, provides for the possibility of being integrated also with track lighting systems, making VAIRUS AIR a very versatile product. A particular management of fluid dynamics creates a powerful and at the same time silent air vortex inside the device, able to uniformly pass through the TiO_2 cells with the consequent oxidation of substances carried by the air.

In one hour VAIRUS AIR, at maximum power, treats 126 m^3 of air so, in environments such as shops and offices, with forced air, a single device can cover up to 150 m^2 (with 3 m height) while in domestic environments and spaces without forced ventilation, the treated surface is approx. 80 m^2 (with 2.7 m height)*.


(*) The above data are to be considered indicative and vary according to the customer's needs and the type of environment to be treated

TECHNOLOGY

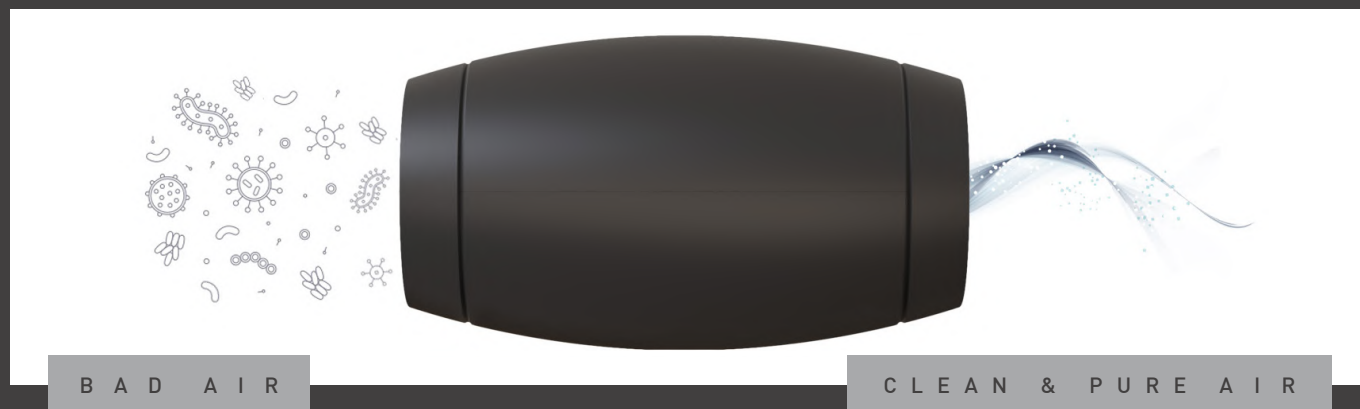

VAIRUS AIR uses an advanced technology that, thanks to the ceramic cells in Titanium Dioxide (TiO_2), activated by specific UV-A LEDs, effectively allows to oxidize and destroy viruses, bacteria, molds, allergens and odors carried by the air into the device.

Photocatalytic oxidation occurs through the creation of free radicals, in proximity of the cells, which attack chemical and biological nature polluting molecules, breaking their molecular bonds and degrading. This process doesn't generate Ozone but low quantity of harmless substances such as Carbon Dioxide (CO_2) and water vapor (H_2O).

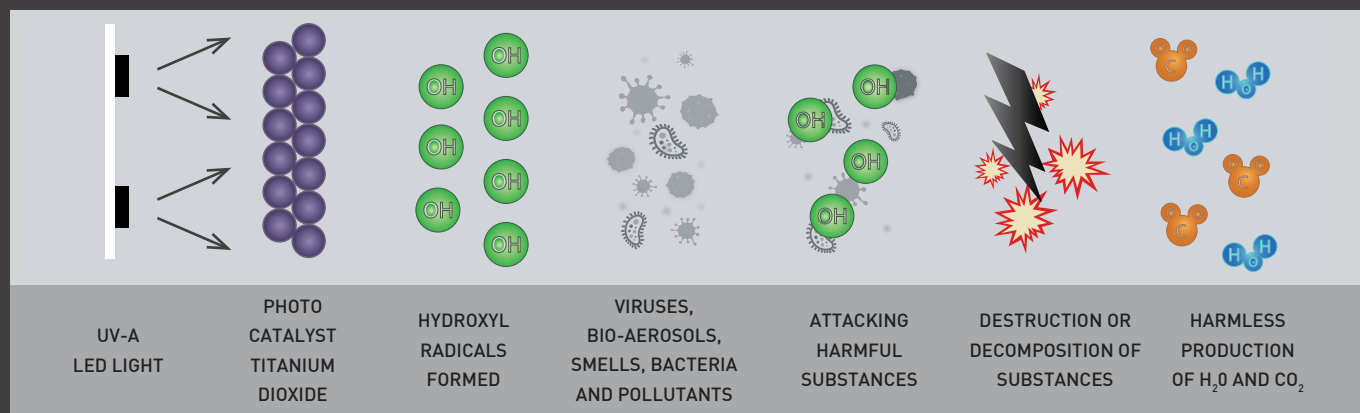

T E C H N O L O G Y





The air treated by VAIRUS AIR passes through 4 levels of filtration: a mechanical pre-filter to avoid the passage of solid bodies (> 3000 micron) and three independent layers of TiO_2 ceramic cells.

The particular processing and porosity of the nanotechnological ceramic cells allows us to have the maximum contact surface and a low resistance to the passage of air which, passing three layers of non-mechanical filtration, makes the disinfection process extremely fast and effective.

VAIRUS AIR, unlike traditional air purifiers with Hepa filters or activated carbon, it does not retain the substances but destroys them avoiding the filters, once saturated, become in turn a source of proliferation of bacterial flora. The system is also able to disrupt pollutants 1000 times smaller than those that standard Hepa filters retain.

Our ceramic cells do not require periodic replacement (it is estimated to last about 15 years), therefore VAIRUS AIR has reduced maintenance costs, limited only to washing and periodic replacement of the prefilter.

The internal LED UV-A kit, has a useful life (maintenance of luminous efficiency of 70%) of 35.000 h, therefore, considering an average use of 9h / day, has a duration of over 10 years. LED kit can in any case be replaced as a spare part.

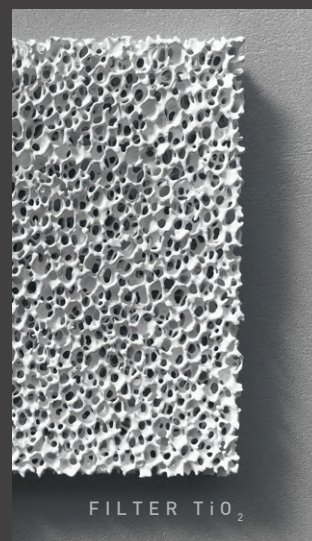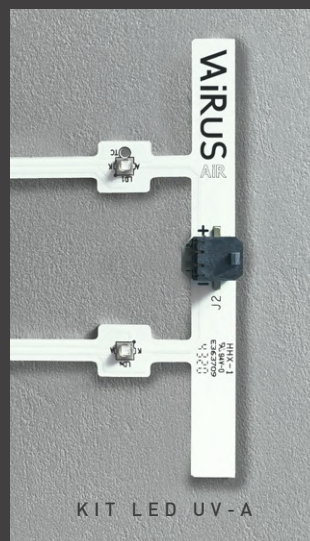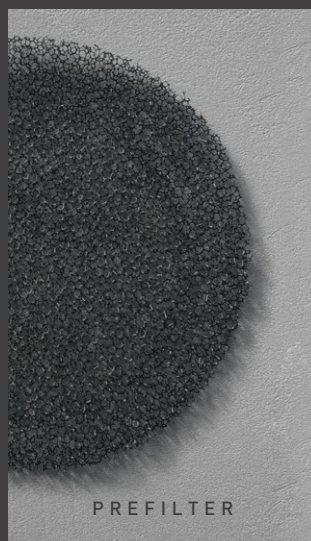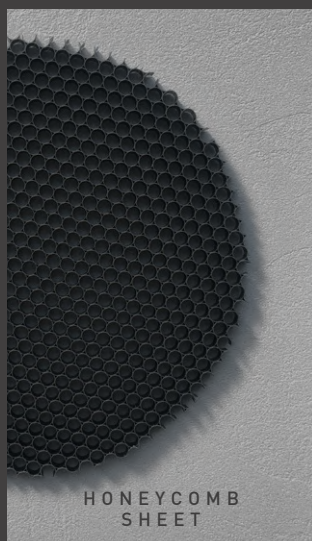

WHAT DESTROYS



VIRUSES



BACTERIA



DANGEROUS GAS



VOC



CIGARETTE SMOKE



SMELLS



FUNGUS & MOLD



ALLERGENS

VAIRUS AIR devices aim to improve and maintain indoor air quality, helping to contain and slow down the transmission of airborne pathogens.

In the environments a microbiological charge is constantly generated due to airborne pollutants that are created during the day or enter through our windows and VAIRUS AIR has the task of destroying up to 99.9%* of these volatile substances.

The oxidative action of Photocatalysis against viruses and bacteria is widely documented in the scientific literature so VAIRUS AIR can help to remove pathogens that might otherwise remain in the air for hours.

VOCs (Volatile Organic Compounds) include a wide range of dangerous compounds and they make up the bulk of our indoor gaseous pollution as they are contained for example in cleaning products, deodorants and paints.

Formaldehyde, quickly destroyed by VAIRUS AIR, it is a stable substance difficult to remove from the indoor air, which can be released from furniture, upholstery, clothing and especially from cigarette smoke. VOCs, if left untreated, can cause long-term adverse health effects.

Also, some alkaline aerosols, for example Ammonia, they can affect the increase in the spread of some viruses therefore it's important to keep the air purified as much as possible in the environments in which we stay.

[*] The above information refers to scientific tests conducted in specialized laboratories

SARS-CoV-2_COV2019 TEST *

The aim of the study was to determine the virucidal efficacy of the device VAIRUS AIR against the viral strain SARS-CoV-2_COVID2019 ITALY / INMI1 after a contact time of 5 minutes at room temperature.

The test was conducted by an accredited laboratory UNI CEI EN ISO/IEC 17025:2018. The virus was placed on the TiO₂ filter in three positions irradiated with UV-A light.

Subsequently of first interaction, residual virus activity was tested evaluating the infectious dose of tissue culture 50% (TCID₅₀).


In each of the three positions, in correspondence of UV-A light, 100µL of the viral suspension were affixed.

The Plate Recovery Control (T0) has demonstrated a viral titer of 4.75 Log₁₀ TCID₅₀ for 1 ml.

VAIRUS AIR demonstrated an average reduction of 3.25 Log₁₀ of the viral title (reduction of 99.94%) already after a 5 minutes exposure.

Also, at the end of the test, no cytotoxicity was detected.

	TIMING OF INTERACTION (ANALYSIS)	AVG Log TCID ₅₀	% OF REDUCTION VS CONTROL
T0	///	4.75	///
TEST	after 5 minutes	1.50	99.94%

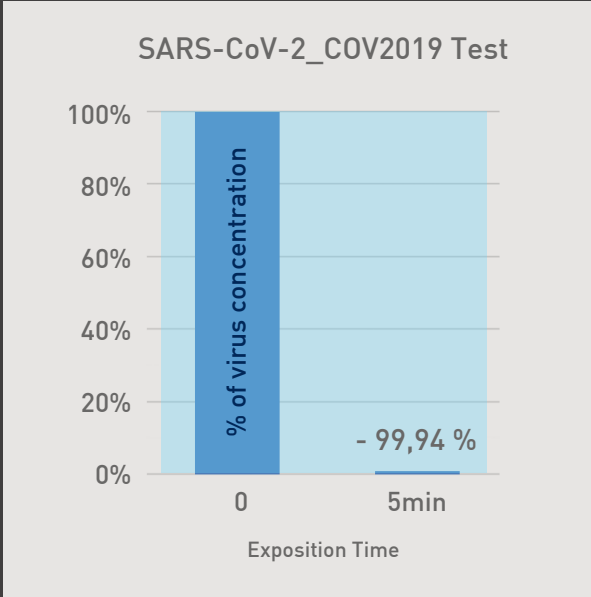


(*) The above information refers to scientific tests conducted in specialized laboratories

TEST RESULTS *

VAIRUS AIR, in continuous mode and at maximum power, it was placed in a 8 m³ sealed chamber introducing different types of pollutants into the air (bacteria, molds and volatile substances).

The analysis was conducted by a specialized laboratory that has measured after one, four and eight hours the air quality. The tests have shown a rapid and evident reduction of the bacterial load level on all the strains analyzed after only one hour of operation of the device VAIRUS AIR. A test was also performed on some VOCs carrying out the same periodic samplings.


Below are the photographic evidence of the tests:

BEFORE THE TEST			
AFTER 1h OF TREATMENT			
	BACTERIA: Bacillus Subtilis Escherichia Coli Serratia Marcescens Staphylococcus aureus	YEASTS: Candida Albicans Common Yeast Cake Saccharomices Spores Saccharomices Ellipsoideus	MOLDS: Aspergillus Niger Aspergillus Flavus Mucor Raucemosus Penicillin Expansus

(*) The above information refers to scientific tests conducted in specialized laboratories


TEST RESULTS

BACTERIA

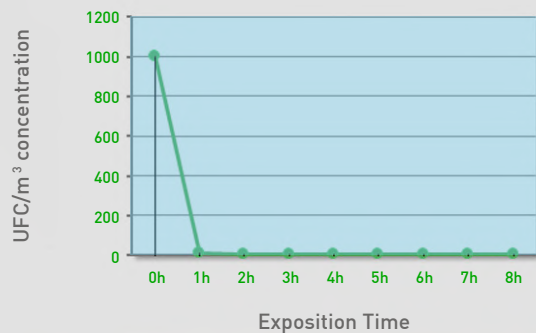


Bacteria typing was not performed after treatment as there is a 99% reduction after one hour of treatment, 99,5% after four hours and 99,9% after eight hours.

YEASTS

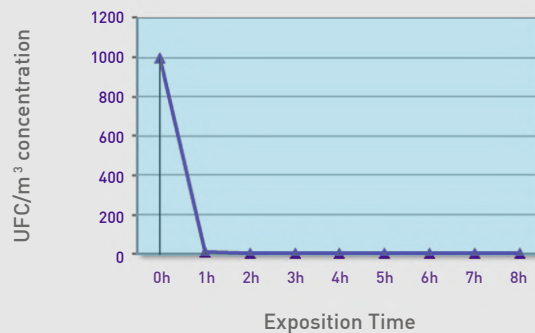


Yeasts typing was not performed following the treatment as there is a reduction of 99% after one hour of treatment, 99,5% after four hours and 99,9% after eight hours.

MOLDS

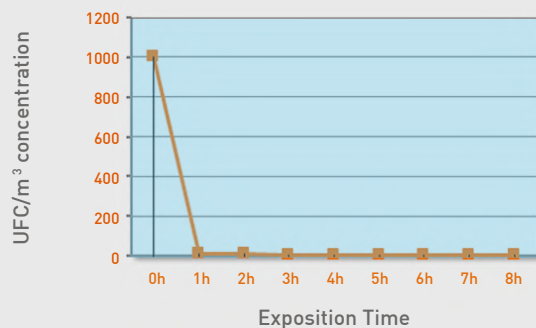

Molds typing was not performed following the treatment as there is a reduction of 99% after one hour of treatment, 99,5% after four hours and 99,9% after eight hours.

VOC

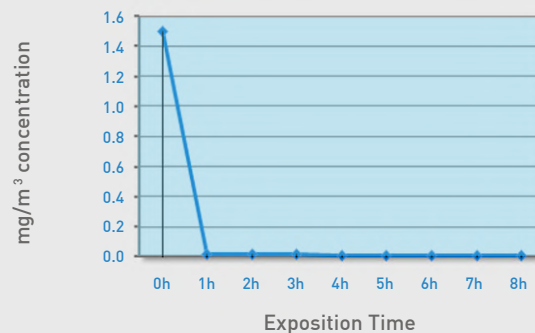


Average fall of the Acetaldehyde and Ammonia at 99,99% already after one hour of treatment. Average fall of the Acetic Acid, Toluene and Formaldehyde at 99,9% after one hour of treatment and VOC after four hours of treatment.


As can be seen from the graphical representations, there is a significant reduction after one hour of treatment (in a 8 m³ sealed chamber) with VAIRUS AIR of all the studied substances.

WHAT DETECTS


SMART VERSION




TEMPERATURE




HUMIDITY




PRESSURE



TVOC




CO₂ RELATIVE




AIR QUALITY (IAQ)*

Premium VERSION

IN ADDITION TO THE SMART VERSION:



PM10



INFLAMMABLE SUBSTANCES

AVAILABLE AT THE END OF 2021

VAIRUS AIR, in the SMART and PREMIUM version, allows the user to check the air quality in real time in the rooms where it's installed and to monitor it over time.




(*) IAQ: Index Air Quality

V E R S I O N S



T R A C K

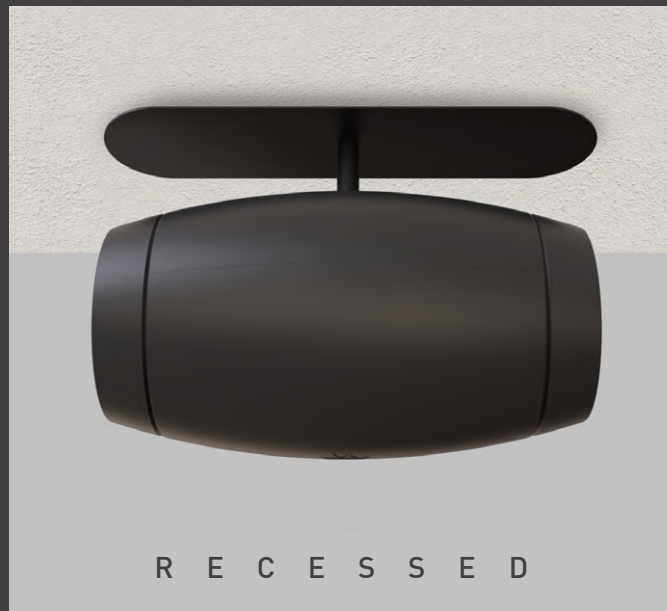

R E C E S S E D



W A L L & C E I L I N G





T A B L E



T R A C K

SUITABLE FOR THE FOLLOWING TRACKS: NA GLOBALTRAC PRO, CONCORD, EUTRAC 25101, HOFFMEISTER, IG STD 677, IVELA, STUCCHI, UNIPRO T3



AIR FLOW
APP DEVICE
IOT 4.0
SMART CONTROL
FILTERS
NOISE
RATED VOLTAGE
POWER CONSUMPTION
ROOM COVERAGE
AIR QUALITY SENSOR

PURE VERSION	
AIR FLOW	126 m³/h
APP DEVICE	✗
IOT 4.0	✗
SMART CONTROL	✗
FILTERS	PREFILTER (DUST CAPTURE) TiO ₂ FILTERS + UV-A LED
NOISE	from 15 dBA to 50 dBA
RATED VOLTAGE	220 ÷ 240 Vac
POWER CONSUMPTION	38 W
ROOM COVERAGE	UP TO 150 m² *
AIR QUALITY SENSOR	✗

SMART VERSION	
AIR FLOW	126 m³/h
APP DEVICE	iOS & ANDROID
IOT 4.0	✓
SMART CONTROL	CASAMBI ⚠
FILTERS	PREFILTER (DUST CAPTURE) TiO ₂ FILTERS + UV-A LED
NOISE	from 15 dBA to 50 dBA
RATED VOLTAGE	220 ÷ 240 Vac
POWER CONSUMPTION	38 W
ROOM COVERAGE	UP TO 150 m² *
AIR QUALITY SENSOR	TEMPERATURE - HUMIDITY PRESSURE - TVOC CO2 rel. - IAQ - AIR FLOW

Premium VERSION	
AIR FLOW	126 m³/h
APP DEVICE	iOS & ANDROID
IOT 4.0	✓
SMART CONTROL	CASAMBI ⚠
FILTERS	PREFILTER (DUST CAPTURE) TiO ₂ FILTERS + UV-A LED
NOISE	from 15 dBA to 50 dBA
RATED VOLTAGE	220 ÷ 240 Vac
POWER CONSUMPTION	38 W
ROOM COVERAGE	UP TO 150 m² *
AIR QUALITY SENSOR	TEMPERATURE - HUMIDITY PRESSURE - TVOC CO2 rel. - IAQ - AIR FLOW INFLAMMABLE GAS - PM10



VERSION AVAILABLE AT THE END OF 2021

(*) The flow rate is indicative, as it varies according to the type of environment / ventilation present.
The data shown refers to an open space (ceiling 3m / h) and with forced ventilation (e.g. shops / offices)

R E C E S S E D



CUT-OUT HOLE: 290 x 55 mm



AIR FLOW
APP DEVICE
IOT 4.0
SMART CONTROL
FILTERS
NOISE
RATED VOLTAGE
POWER CONSUMPTION
ROOM COVERAGE
AIR QUALITY SENSOR

PURE VERSION
126 m³/h
×
×
×
PREFILTER (DUST CAPTURE) TiO ₂ FILTERS + UV-A LED
from 15 dBa to 50 dBa
220 ÷ 240 Vac
38 W
UP TO 150 m² *
×



SMART VERSION
126 m³/h
iOS & ANDROID
✓
CASAMBI
PREFILTER (DUST CAPTURE) TiO ₂ FILTERS + UV-A LED
from 15 dBa to 50 dBa
220 ÷ 240 Vac
38 W
UP TO 150 m² *
TEMPERATURE - HUMIDITY PRESSURE - TVOC CO2 rel. - IAQ - AIR FLOW

<i>Premium</i> VERSION
126 m³/h
iOS & ANDROID
✓
CASAMBI
PREFILTER (DUST CAPTURE) TiO ₂ FILTERS + UV-A LED
from 15 dBa to 50 dBa
220 ÷ 240 Vac
38 W
UP TO 150 m² *
TEMPERATURE - HUMIDITY PRESSURE - TVOC CO2 rel. - IAQ - AIR FLOW INFLAMMABLE GAS - PM10

VERSION AVAILABLE AT THE END OF 2021

(*) The flow rate is indicative, as it varies according to the type of environment / ventilation present.
The data shown refers to an open space (ceiling 3m / h) and with forced ventilation (e.g. shops / offices)

W A L L & C E I L I N G



AIR FLOW
APP DEVICE
IOT 4.0
SMART CONTROL
FILTERS
NOISE
RATED VOLTAGE
POWER CONSUMPTION
ROOM COVERAGE
AIR QUALITY SENSOR

PURE VERSION
126 m³/h
×
×
×
PREFILTER (DUST CAPTURE) TiO ₂ FILTERS + UV-A LED
from 15 dBa to 50 dBa
220 ÷ 240 Vac
38 W
UP TO 150 m² *
×

SMART VERSION
126 m³/h
iOS & ANDROID
✓
CASAMBI ⚠
PREFILTER (DUST CAPTURE) TiO ₂ FILTERS + UV-A LED
from 15 dBa to 50 dBa
220 ÷ 240 Vac
38 W
UP TO 150 m² *
TEMPERATURE - HUMIDITY PRESSURE - TVOC CO2 rel. - IAQ - AIR FLOW



<i>Premium</i> VERSION
126 m³/h
iOS & ANDROID
✓
CASAMBI ⚠
PREFILTER (DUST CAPTURE) TiO ₂ FILTERS + UV-A LED
from 15 dBa to 50 dBa
220 ÷ 240 Vac
38 W
UP TO 150 m² *
TEMPERATURE - HUMIDITY PRESSURE - TVOC CO2 rel. - IAQ - AIR FLOW INFLAMMABLE GAS - PM10

VERSION AVAILABE AT THE END OF 2021

(*) The flow rate is indicative, as it varies according to the type of environment / ventilation present.
The data shown refers to an open space (ceiling 3m / h) and with forced ventilation (e.g. shops / offices)

T A B L E

LED DRIVER CE - cULus Listed WITH INTERCHANGEABLE ELECTRICAL PLUGS FOR EU- UK - USA



AIR FLOW
APP DEVICE
IOT 4.0
SMART CONTROL
TOUCH ON / OFF - SELECT MODE
FILTERS
NOISE
RATED VOLTAGE
POWER CONSUMPTION
ROOM COVERAGE
AIR QUALITY SENSOR

SMART VERSION
126 m³/h
iOS & ANDROID
✓
CASAMBI
✓
PREFILTER (DUST CAPTURE) TiO ₂ FILTERS + UV-A LED
from 15 dBa to 50 dBa
110 ÷ 240 Vac
38 W
UP TO 80 m²*
TEMPERATURE - HUMIDITY PRESSURE - TVOC CO2 rel. - IAQ - AIR FLOW



<i>Premium</i> VERSION
126 m³/h
iOS & ANDROID
✓
CASAMBI
✓
PREFILTER (DUST CAPTURE) TiO ₂ FILTERS + UV-A LED
from 15 dBa to 50 dBa
110 ÷ 240 Vac
38 W
UP TO 80 m²*
TEMPERATURE - HUMIDITY PRESSURE - TVOC CO2 rel. - IAQ - AIR FLOW INFLAMABLE GAS - PM10

VERSION AVAILABLE AT THE END OF 2021

(*) The flow rate is indicative, as it varies according to the type of environment / ventilation present.
The data shown refers to an open space (ceiling 3m / h) and with forced ventilation (e.g. shops / offices)




FINISHING & DETAILS

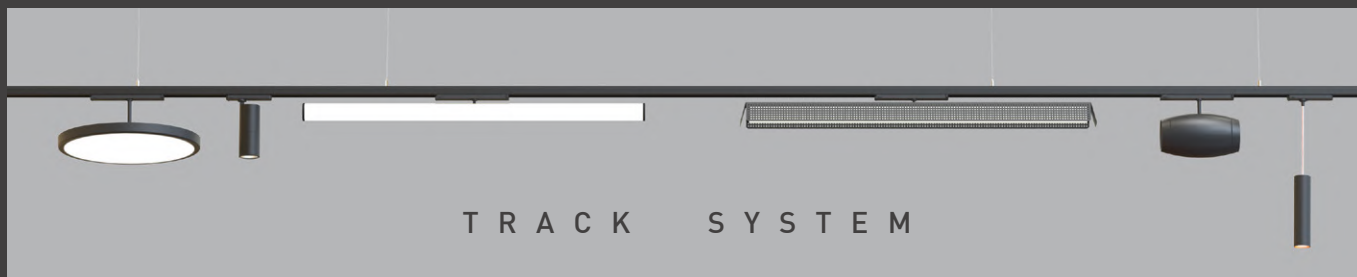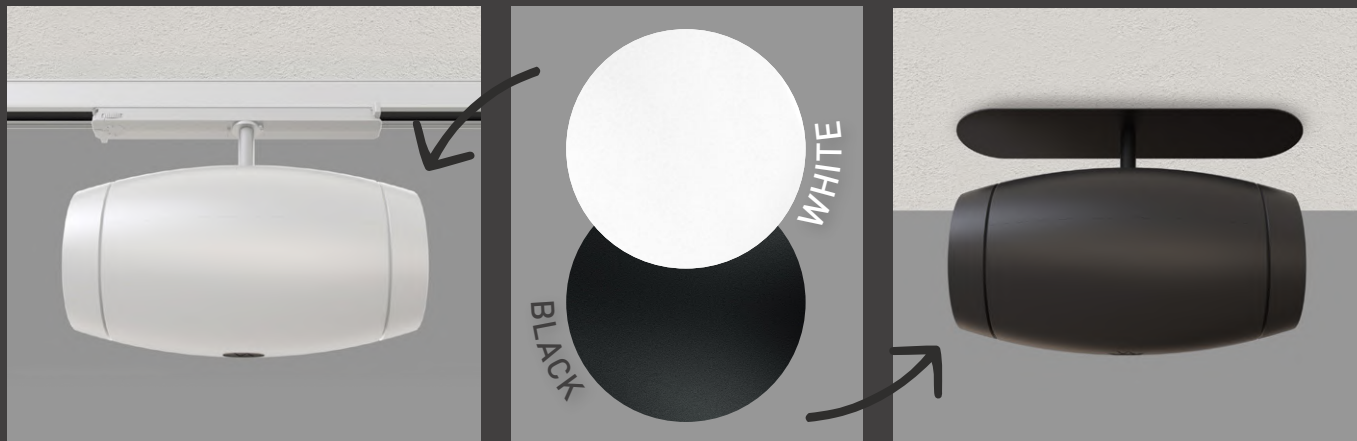

TRACK SYSTEM





UPPER TOUCH BUTTON*

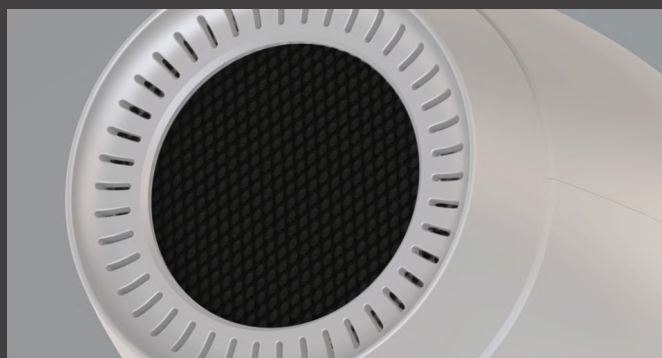

(*) only for table version



M A T E R I A L S

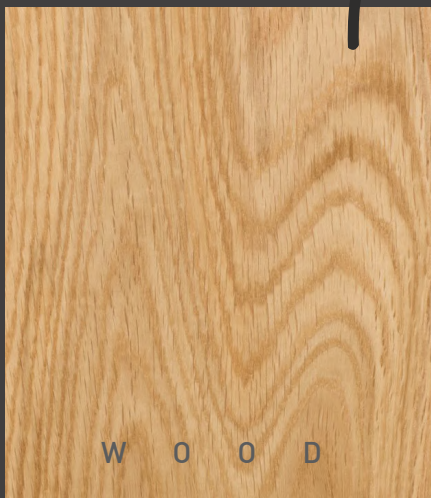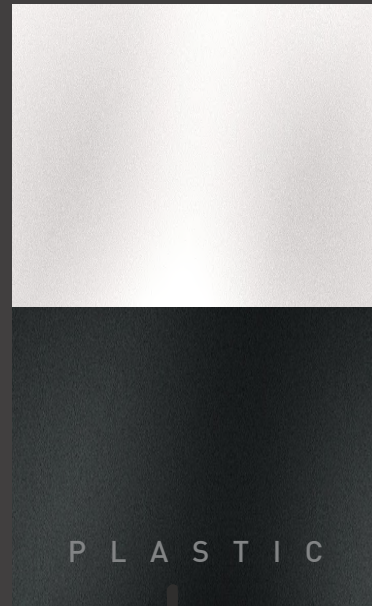

SMART CONTROL IoT WITH CASAMBI

VAIRUS AIR, in the SMART and PREMIUM version, is managed through the CASAMBI APP (with Bluetooth Mesh BLE technology) which allows from a smart device to set the fan speed, turn on and off, timing ignitions, create scenarios, add the device to the LIGHTS network and command it remotely from anywhere in the world.

DATA, CHECK & STATISTICS LIVE

- STATUS DEVICE
- TVOC
- HUMIDITY
- PRESSURE
- TEMPERATURE
- LOW POWER
- GAS



CONTROL & REGULATION

- SCENARIOS
- AIR FLOW
- TIMER
- UP TO 200 DEVICES



SMART CONTROL IoT WITH CASAMBI

The SMART control system, through cloud, allows you to view the historicized air quality data divided by category of volatile substances. Depending on the needs, it will also be possible to download the daily, weekly or monthly data.

REMOTE CONTROL & HISTORY REPORTS*

DASHBOARD > STORE 1 > VAIRUS AIR



VAIRUS AIR

Day Week Month





Export

Humidity
40 %

TVOC
245 ppb

CO₂ REL
1305 ppm

IAQ
239

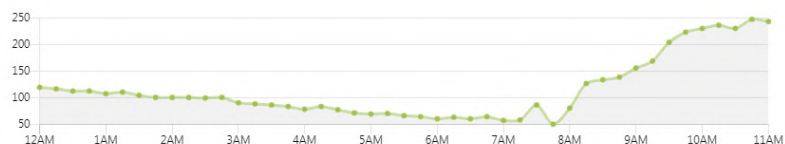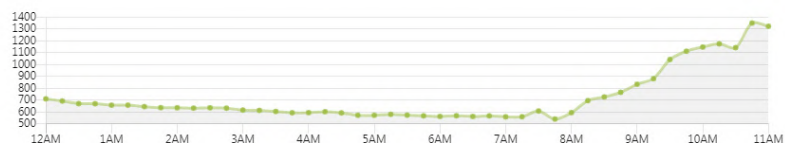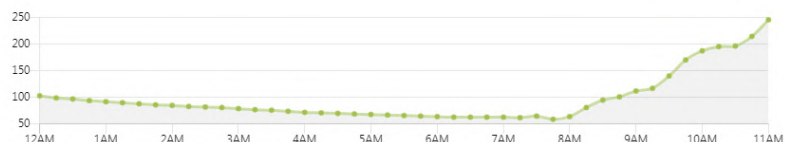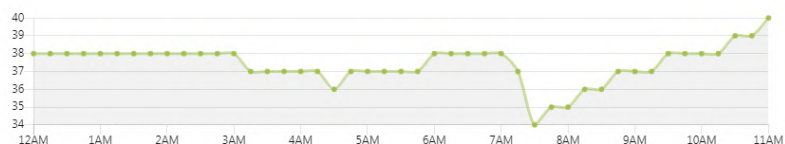

(*) Remote control available with gateway internet connection




MADE IN ITALY



A POWERFUL DEVICE FOR A BETTER AIR QUALITY



archiproducts

DESIGN AWARDS

—
WINNER 2020

DESIGNED AND MADE IN BERGAMO