




Custom Braided Hose

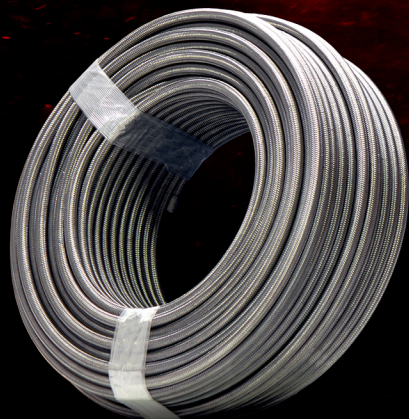

Liner Full Bore Smooth Teflon

Braid Braid Single Braid 304 Stainless Steel

Temperature -54°C to 232°C (-65°F to 450°F)

Length Custom Length Made to Order

Use Steam, Chemical, Automotive, Food Service, pharmaceutical, Petroleum Based Hydraulic Fluids, Petroleum Processing

Hose I.D.	Hose O.D.	Max Working Pressure	Minimum Burst Pressure	Minimum Bend Radius
1/4"	0.35" / 8.8 MM	3,000 PSI	12,000 PSI	3" / 75 MM
3/8"	0.48" / 12.1 MM	2,500 PSI	10,000 PSI	5" / 125 MM
1/2"	0.64" / 16.2 MM	2,000 PSI	8,000 PSI	6.6" / 165 MM
3/4"	0.92" / 23.4 MM	1,200 PSI	4,800 PSI	11.8" / 300 MM
1"	1.17" / 29.7 MM	1,000 PSI	4,000 PSI	17.7" / 450 MM



Available Hose Connection Types

Hose Size	Tube Stub		Female JIC Swivel		Male NPT		Female NPT	
	Size	Part Number	Size	Part Number	Size	Part Number	Size	Part Number
1/4"	1/4"	BHFS-04C-04TS	1/4"	BHFS-04C-04JF	1/4"	BHFS-04C-04NM	1/4"	BHFS-04C-04NF
	3/8"	BHFS-04C-06TS	3/8"	BHFS-04C-06JF	3/8"	BHFS-04C-06NM		
3/8"	1/4"	BHFS-06C-04TS	1/4"	BHFS-06C-04JF	1/4"	BHFS-06C-04NM		
	3/8"	BHFS-06C-06TS	3/8"	BHFS-06C-06JF	3/8"	BHFS-06C-06NM	3/8"	BHFS-06C-06NF
1/2"	1/2"	BHFS-06C-08TS	1/2"	BHFS-06C-08JF	1/2"	BHFS-06C-08NM		
	3/8"	BHFS-08C-06TS	3/8"	BHFS-08C-06JF	3/8"	BHFS-08C-06NM		
3/4"	1/2"	BHFS-08C-08TS	1/2"	BHFS-08C-08JF	1/2"	BHFS-08C-08NM	1/2"	BHFS-08C-08NF
	3/4"	BHFS-12C-12TS	3/4"	BHFS-12C-12JF	3/4"	BHFS-12C-12NM		
1"	1"	BHFS-16C-16TS	1"	BHFS-16C-16JF	1"	BHFS-16C-16NM		

Mako Products

SUPERLOKWORLD.COM
844-200-MAKO