

# COSASCO® STRIP COUPON HOLDER

MODEL 6200

Request A Quote



## Features

- Meets NACE MR0175 and MR0103
- Material — 316 S.S.

Cosasco® strip holders for the 2" system are used to suspend either 3" or 6" coupons in the area to be monitored. Attached to the bottom of the solid plug by means of a left handed thread, the coupon holder also serves as a primary packing retainer.

The single tongue of the holder allows use of one or two coupons, insulated or uninsulated. Cosasco coupon holders are available in standard sizes from 2.25" to 36.00". All holders are supplied with two sets of mounting hardware, Part #123567. (Coupon insulation is supplied with the coupons). Any material and length can be supplied on special order.

Formulas for sizing the coupons holders are shown. All holders under 3.25" length are made from one piece in a non-welded construction. Non-welded holders 3.25" or above are available.

### Coupon Holder Sizing

After selecting the access fitting with a solid plug, and knowing pipe or pressure vessel size, determine the coupon style and the position where it should be located.

Use the formulas below to calculate holder length. If calculated length is not an even .25" increment, select next shortest to nearest .25".



### Top of the Line Monitoring

Coupon holder positions the effective length of coupon into pipe vessel.

$$(A + Pw + Wg) - 2 \frac{1}{2}"$$

### Middle of the Line Monitoring

Coupon holder positions  $\frac{1}{2}$  of the coupon on either side of pipe centerline.

$$(A + 1/2Pd + Wg) - (2 \frac{1}{2}" + 1/2El)$$

### Bottom of the Line Monitoring

Coupon holder positions coupon approximately  $\frac{1}{4}$ " off bottom of line.

$$(A + Pd + Wg) - (2 \frac{3}{4}" + Pw + El)$$

### WHERE:

**A** = Length of Access fitting body

**Pw** = Pipe wall (wall thickness of pipe)


**Pd** = Pipe diameter (outside diameter of pipe)

**El** = Effective length of coupon (the portion of the coupon exposed to the environment, i.e. 3" coupon = 1-5/8", 6" coupon = 4-3/4")

**Wg** = Weld gap (per weld procedures, 1/16" is normal per ANSI B31.1 1973)


COSASCO®

# MODEL 6200

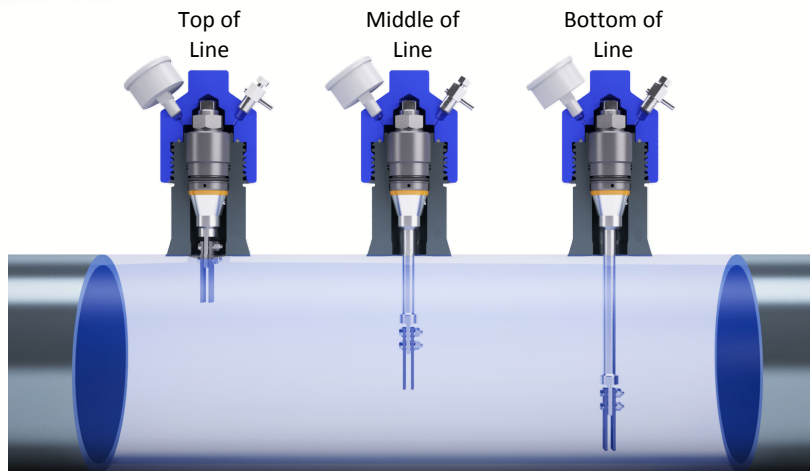

Coupons shown rotated 90° from normal position

## Dimensions

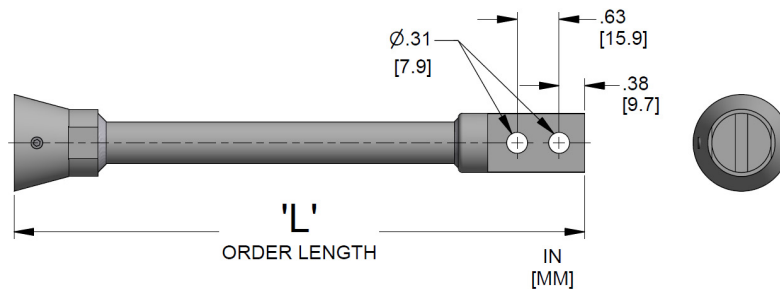

## Ordering Information

**Note:** For high velocity process conditions it is recommended that Wake Frequency Calculations be performed – please contact a Cosasco representative for further details.

Model		
6200	Strip Coupon Holder	
6200N	Non-Welded Strip Coupon Holder (Minimum Order Length 3.25 inches)	
	<b>Code</b>	<b>Order Length</b>
	LL.LL	Order Length 2.25" – 36.00" (.25" Increments)

6200	—	2.50	←	Example
------	---	------	---	---------

### Unit Weight:

P/N 123567 Mounting Hardware Set  
P/N 123999 Coupon Insulation Set

### Accessories:

Up to 3 inches	1 lb./ .45 kg.
3 - 10 inches	2 lbs./ .90 kg.
10.25 - 20 inches	3 lbs./ 1.36 kg.
20.25 - 36 inches	5 lbs./ 2.27 kg.

### Cosasco

11841 Smith Avenue  
Santa Fe Springs, CA 90670, USA  
Tel: 1-562-949-0123  
Email: [sales@cosasco.com](mailto:sales@cosasco.com)  
Web Site: [www.cosasco.com](http://www.cosasco.com)

©Rohrbach Cosasco Systems, Inc. All rights reserved

The contents of this publication are presented for information purposes only, and while effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described wherein or their use or applicability. We reserve the right to modify or improve the designs or specifications of our products at any time without notice.

Rohrbach Cosasco Systems Corrosion Monitoring Equipment is manufactured and sold under one or more of the following US Patents: 4138878, 4238298, 4338563, 4514681, 4537071, 4587479, 4605626, 4625557, 4755744, 4839580, 4841787, 4882537 5243297

