

RAISED STEEL PANEL



CHOOSE YOUR OPTIONS

SPECIFICATIONS	ThermoGuard™	ThermoSteel™	TS-138	Series 24	ValuCraft Plus
U-Factor R-Value	0.14 18.0	0.22 9.25	0.26 7.50	0.38* 7.0*	0.38* 7.0*
Foam/Insulate	Polyurethane	Polystyrene	Polystyrene	T-Bond/ Plain Steel	T-Bond/ Plain Steel
Thickness	2 inches	2 inches	1¾ inches	2 inches	2 inches
Exterior Steel	27 gauge	25 gauge	27 gauge	24 gauge	25 gauge
Interior Steel	27 gauge	26 gauge	27 gauge	N/A	N/A
Warranty* <i>Excludes Springs</i>	Lifetime	Lifetime	25 years	Lifetime	25 years
COLORS				*With T-Bond	*With T-Bond


White	•	•	•	•	•
Almond	•		•	•	•
Sandtone	•	•	•	•	•
Tera-Bronze	•	•	•	•	•
Green	•		•		
Gray	•		•		
Coffee	•	•	•	•	•
Black	•	•	•	•	
Light Oak	•	•	•	•	
Dark Oak	•	•	•	•	
Weathered Oak	•		•		
Rosewood		•			
Color Select**	•	•	•	•	•

*For full warranty details contact your Midland dealer

**ColorSelect™ uses Sherwin Williams Polane® Solar Reflective Polyurethane Enamel, providing a durable, heat-repelling coating.



WINDOWS

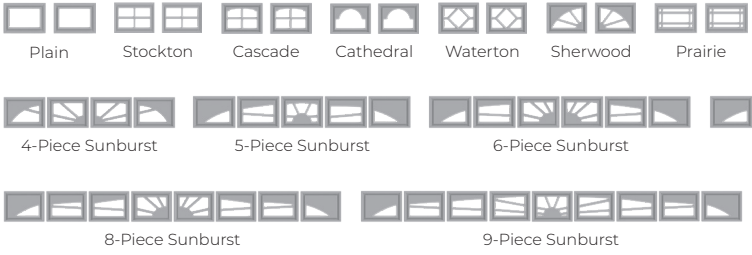

COLORS



 *Printed colors may not be accurate. Contact your local Midland dealer for exact color samples

GLASS



*Tempered only. All other glass is available in both tempered and untempered.