



# CS20 • CS24 CS26 RIBBED



# CHOOSE YOUR OPTIONS

## SPECIFICATIONS

|                                     | CS20  | CS24  | CS26   |
|-------------------------------------|---|---|--|
| Plain Steel U-Factor                | Unrated   | Unrated   | Unrated  |
| <b>U-Factor</b><br>R-Value: T-Bond: | <b>0.38</b><br>7.05  | <b>0.38</b><br>7.05  | <b>0.38</b><br>7.05  |
| Thickness                           | 2 inches  | 2 inches  | 2 inches   |
| Maximum Width                       | 40 ft 2 in  | 24 ft 2 in  | 16 ft 2 in   |
| Exterior Steel                      | 20 gauge  | 24 gauge  | 26 gauge   |
| Warranty* <i>Excludes Springs</i>   | 10 years  | 10 years  | 25 years   |

\*For full warranty details contact your Midland dealer




## COLORS



\*ColorSelect™ uses Sherwin Williams Polane® Solar Reflective Polyurethane Enamel, providing a durable, heat-repelling coating.


## WINDOWS

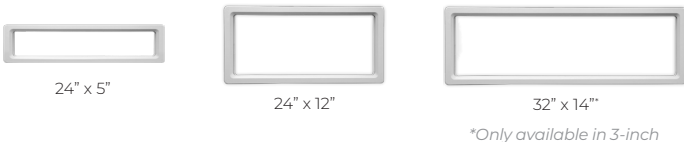

## GLASS




## TRACK MOUNTING



**Reverse Angle Mounted Track**  
Continuous leg-in angle to attach to steel jambs




**Angle Mounted Track**  
Continuous leg-out angle used on larger doors to attach to wood jambs



**Bracket Mounted Track**  
To attach to wood jambs


## TRACK CONFIGURATIONS



**Standard Lift**  
For normal installations



**Inclined Track**  
To follow pitch of roof



**Hi-Lift**  
To put horizontal track as close to ceiling as possible



**Vertical Lift**  
Full vertical rise where headroom is available



**Low Headroom**  
For low-clearance installations