

NEW

Slym

Ultra-thin. Ultra-compact







100% HTE Compatible

Built with CCELL EVO, our all-new heating technology, Slym is capable of bringing out the distinctive aromas and rich flavor profiles of high terpene extracts, allowing for a memorable, true-to-plant experience with every inhale.





Ultra-Thin, Ultra-Compact.

Packed in a distinctive ultra-thin body, Slym's visible oil tank design features a contour-cut mouthpiece insulated on a smooth metallic surface. Slym is also equipped with a fashionable inhale activated LED light, an ingenious touch to this simple but sleek design.







Slym But Mighty

Built with care in mind, Slym is here to deliver upgraded safety and purer flavors with the introduction of medical-grade 316L stainless steel internal materials and the unrivaled ceramic heating element.

Despite packed in a small body, Slym comes in a large battery providing up to 280mAh capacity, allowing for a prolonged shelf life of over 1 year*.

*See Specs Section for more battery info. Actual shelf life may vary subject to local environmental conditions.



COLORFUL OPTIONS



Specs & Features

- Battery Capacity: 280mAh/ 210mAh/ 280mAh
- Tank Volume: 0.3ml/ 0.5ml/ 1ml
- Dimensions:

0.3ml & 0.5ml

 $3.9H \times 0.75W \times 0.26D$ (in) / 99H x 19W x 6.7D (mm)

<u>1ml</u>

4.13H x 0.77W x 0.35D (in) / 105H x 19.56W x 8.86D (mm)


- · All-new CELL EVO heating technology
- Ultra-slim lightweight design
- Full metal housing
- Medical-grade 316L stainless steel center post
- Inhale activated
- USB-C charging (0.5ml & 1ml)
- · Available for customization





OEM Capabilities (0.3ml & 0.5ml)



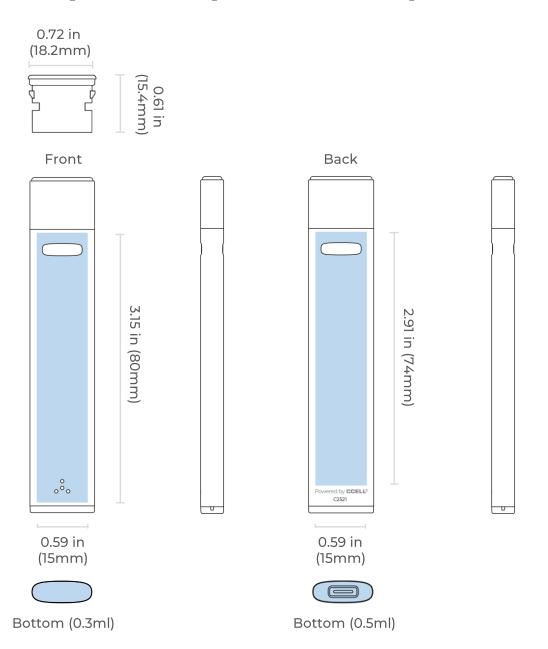

Mouthpiece

Material: Food-grade PCTG

OEM Option: Injection molding

Battery Case

Material: Aluminum alloy

OEM Options: Coating, silkscreen printing, laser engraving

OEM Dimensions:

Front - 3.15H x 0.59W (in)/80H x 15W (mm)

Back - 2.91H x 0.59W (in)/74H x 15W (mm)


Bottom Cap

Material: PC

OEM Option: Injection molding

OEM Capabilities (1ml)



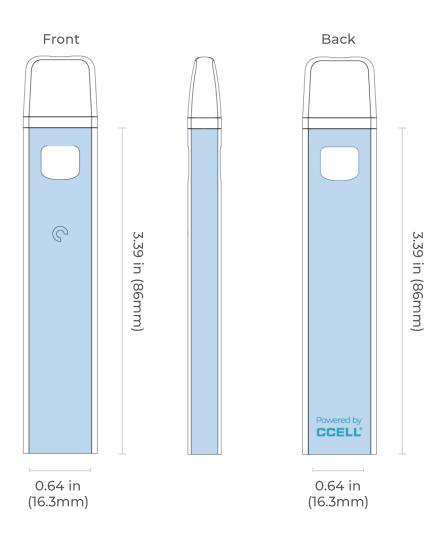

Mouthpiece

Material: Food-grade PC

OEM Option: Injection molding

Battery Case

Material: Aluminum alloy

OEM Options: Coating, silkscreen printing, laser engraving

OEM Dimensions:

 $3.39H \times 0.64W \times 0.28D (in)/86H \times 16.3W \times 7D (mm)$

Bottom Cap

Material: PC

OEM Option: Injection molding


Filling and Assembly Instructions





STEP 1

Place the preloaded battery tray onto the baseboard.



STEP 3

Fill oil into the devices' reservoirs.




STEP 2

Place the deflector over the tray.



STEP 4

Place the preloaded mouthpiece tray onto the deflector.



STEP 5

Press with machine to seal off the filled devices.

*For illustration purposes only.

Packaging Design











NEW

Slym

Ultra-thin. Ultra-compact



FOLLOW US @CCELLOFFICIAL







