


FUJITSU Component Touch Panels

Feather Touch - Long Life 4-Wire series

Fujitsu Resistive Touch Panel Specification

Features

- Superior quality 4-wire resistive touch panels
- Available in light input force types (min. 0.02N) or standard force types
- Light input force with dual input gesture supports PCAP comparable user experience
 - Pinch, Zoom, Rotate, Swipe or Flick action detection by the controller
- Excellent specification and high quality panels for a wide range of applications
- Pen/finger input support
- 80% transparency typical
- RoHS compliant

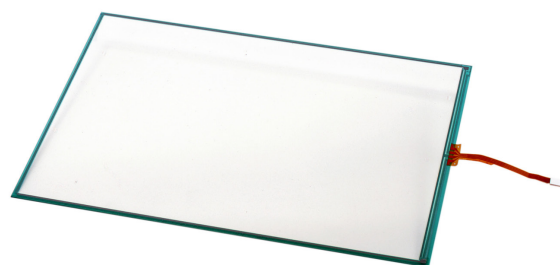

■ Feather Touch - Long Life 4-Wire Resistive Touch Panel Part Numbers

Size	As- pect Ratio	Part number	Transparent area (mm)	Glass thick- ness (mm)	Tail (Flex) length mm	Transparency %
22	wide	FID-1144-001-A22	479.76 x 303.1	1.8	120	80
19	4x3	FID-1143-001-A19	382.92 x 307.66	1.8	120	80
15	4x3	FID-1142-001-A15	311.0 x 234.2	1.8	120	80
15	4x3	FID-1141-001-A15	309.0 x 233.0	1.8	120	80
12.1	4x3	FID-1135-001-A12	251.0 x 189.5	1.1	75	80
10.4	4x3	FID-1134-001-A10	216.0 x 163.0	1.1	75	80
10.4	4x3	FID-1133-001-A10	216.6 x 164.6	1.1	75	80
10.1	wide	FID-1132-001-A10	229.0 x 131.5	1.1	75	80
10.1	wide	FID-1131-001-A10	223.4 x 141.5	1.1	75	80
8.4	4x3	FID-1125-001-A08	175.9 x 133.3	1.1	61	80
8.4	4x3	FID-1124-001-A08	176.0 x 133.5	1.1	61	80
7	wide	FID-1123-001-A07	162.4 x 98.6	1.1	61	80
7	wide	FID-1122-001-A07	159.4 x 97.44	1.1	61	80
5.7	4.3	FID-1121-001-A05	119.2 x 89.4	1.1	61	80

- Notes: Full specifications are available - please contact your local Sales Representative or use the Contact Form to request


Controller Boards

Part Number	Type	Support Interface	Features	Dimmensions
FID-1850-170	4-wire	RS232C	Single input	75.0 x 30.0 x 8.5
FID-1850-150	4-wire	USB (full speed)	Single input	75.0 x 30.0 x 8.5
FID-1850-160	4-wire	USB (full speed)	Dual input	60.0 x 30.0 x 5.2

Control IC


Part Number	RTP Type	Support Interface	Feature	Dimensions
FID-1860-013	4-wire	Asynchronous serial	Dual/single input	9.0 x 9.0 x 1.7 48 pin LFQFP
FID-1860-014	4-wire	USB (full speed)	Dual/single input	9.0 x 9.0 x 1.7 48 pin LFQFP
NC41120-0038	4-wire	I2C	Dual/single input	9.0 x 9.0 x 1.7 48 pin LFQFP

Dimension example

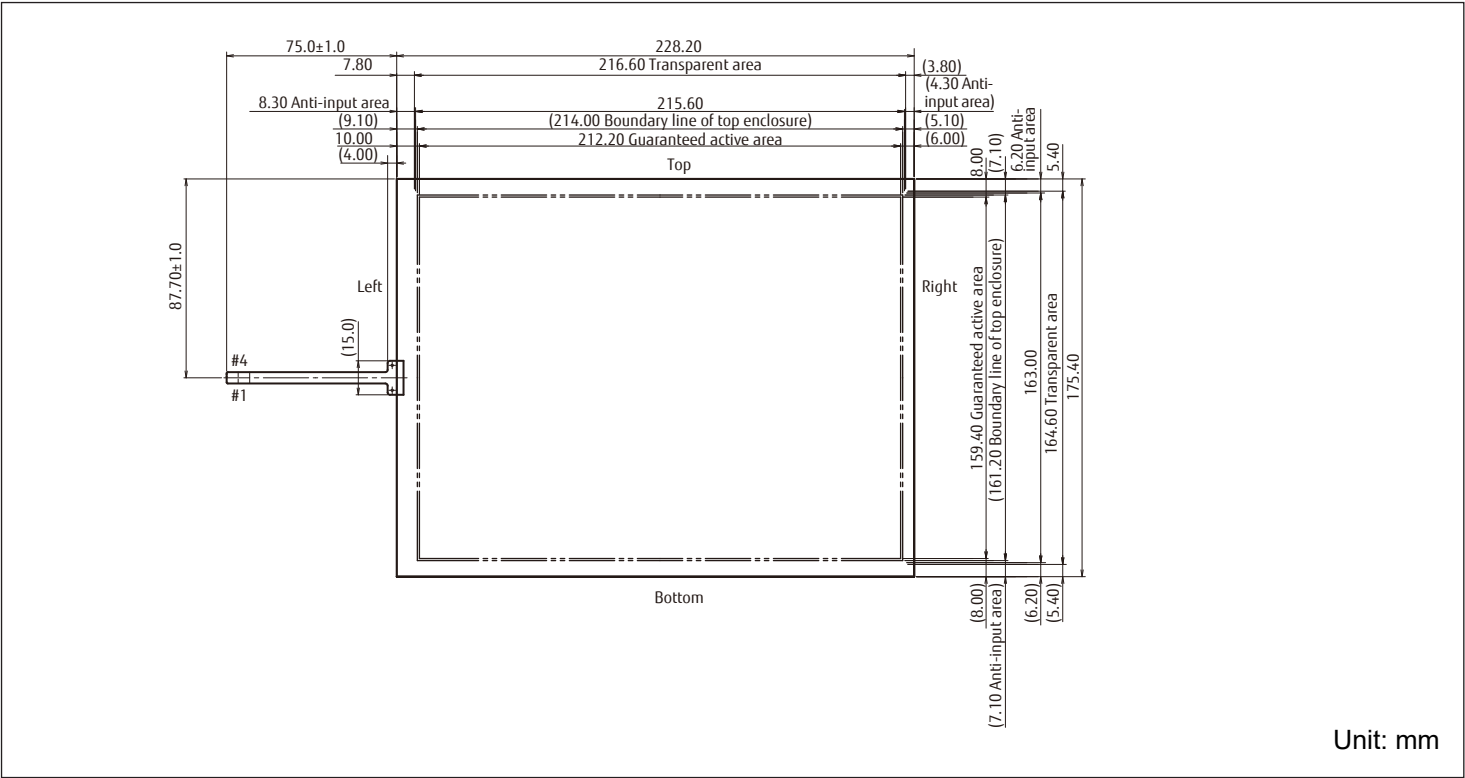

■ System description and block diagram

Fujitsu's touch panel in combination with a control IC chip or control board is used for transfer the co-ordinate data to the host system.

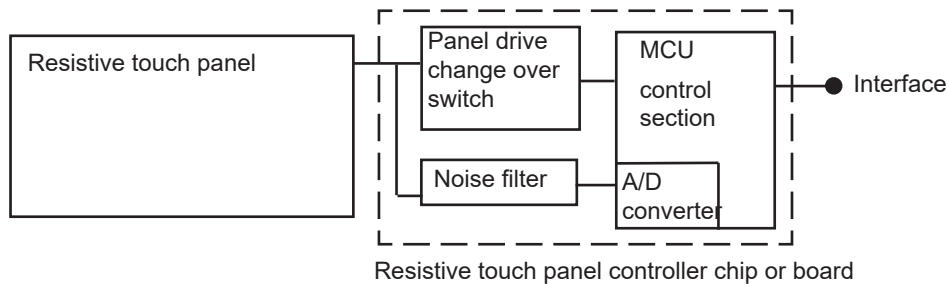

■ General notes

Touch panels are made of glass, so care must be taken in handling them. Do not stress, pile, bend, lift by the cable or put any stress on the film, for example moving by film face vacuum. In order to clean wring dry a cloth which has been emersed in a natural detergent.

DO NOT use any organic solvent, acid or alkali solution. Watch the edge of the panel when cleaning, again for safety reasons.

■ Detailed specifications

Complete specification document is available upon request.

■ Electrical: Touch Panels

Rated voltage	DC 5V
Switch bounce (chattering)	20ms maximum
Insulation resistance	10MΩ minimum

■ Environmental: Touch Panels

Operating temperature	-5°C to 60°C
Storage temperature	-30°C to 70°C
Operating humidity *1	20% to 90%
Storage humidity *1	10% to 90% RH

*v: Maximum wet bulb temperature of 38°C

Contact

Japan
 FUJITSU COMPONENT LIMITED
 Shinagawa Seaside Park Tower
 12-4, Higashi-shinagawa 4-chome,
 Tokyo 140 0002, Japan
 Tel: (81-3) 3450-1682
 Email: fcl-contact@cs.fcl-components.com

North and South America
 FUJITSU COMPONENTS AMERICA, INC.
 350 Cobalt Way, M/s 160
 Sunnyvale, CA 94085 U.S.A.
 Tel: (1-408) 745-4900
 Email: fcai.components@fcl-components.com

Europe
 FUJITSU COMPONENTS EUROPE B.V.
 Diamantlaan 25
 2132 WV Hoofddorp
 Netherlands
 Tel: (31-23) 5560910
 Email: info.fceu@cs.fcl-components.com

Asia Pacific
 FUJITSU COMPONENTS ASIA, Ltd.
 No. 20 Harbour Drive, #07-01B
 Singapore 117612
 Tel: (65) 6375-8560
 Email: fcal@fcl-components.com

China
 FUJITSU ELECTRONIC COMPONENTS
 (SHANGHAI) CO., LTD.
 Room 4306, BM Intercontinental Business Center,
 100 Yutong Rd, Shanghai 200070, China
 Tel: (86 21) 3253 0998
 Email: fcsh@fcl-components.com

Hong Kong
 FUJITSU COMPONENTS HONG KONG Co., Ltd.
 Room 13, 23/F, Seapower Tower, Concordia Plaza,
 No.1 Science Museum Road,
 Tsim Sha Tsui East, Kowloon, Hong Kong
 Tel: (852) 2881 8495
 Email: fcsh@fcl-components.com

Korea
 FUJITSU COMPONENTS KOREA, LTD.
 Alpha Tower #403,
 645 Sampyeong-dong,
 Bundang-gu, Seongnam-si,
 Gyeonggi-do, 13524 Korea
 Tel: (82 31) 708-7108
 Email: fck@fcl-korea.co.kr

Copyright

All trademarks or registered trademarks are the property of their respective owners. Fujitsu Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice.

Copyright ©2022 Fujitsu Components America, Inc.
 All rights reserved. Revised April 20, 2022.