


Premium Poly Drafting Chair

Assembly instructions




1

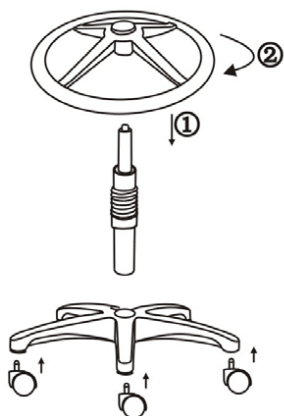


Place plastic cover on gas lift at height you would like drafting ring to be situated when seated. This can be adjusted after assembly.

Place drafting ring over gas cylinder and rotate clockwise to lock

2

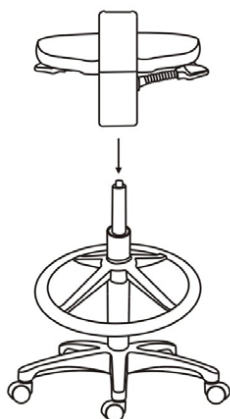

3

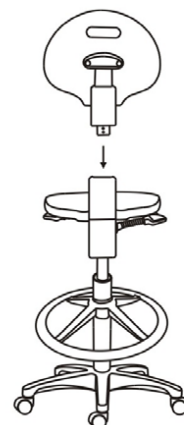

4



1. Insert the back firmly into the mechanism at the back of the seat unit.
2. Push down all the way until the back bottoms out.
3. Lift the back slowly through the ratchet slots until the lumbar is in the correct position.
4. If you raise the back beyond the top ratchet slot, go back to point 2.



1PC



1PC



1PC



1PC



5PC



1PC

Need help?



Assembly Videos on: www.pagointernational.com.au



support@pagointernational.com.au

