


ANTIMONY FLAT PLATE

B A T T E R I E S

EnerSys™

Power/Full Solutions

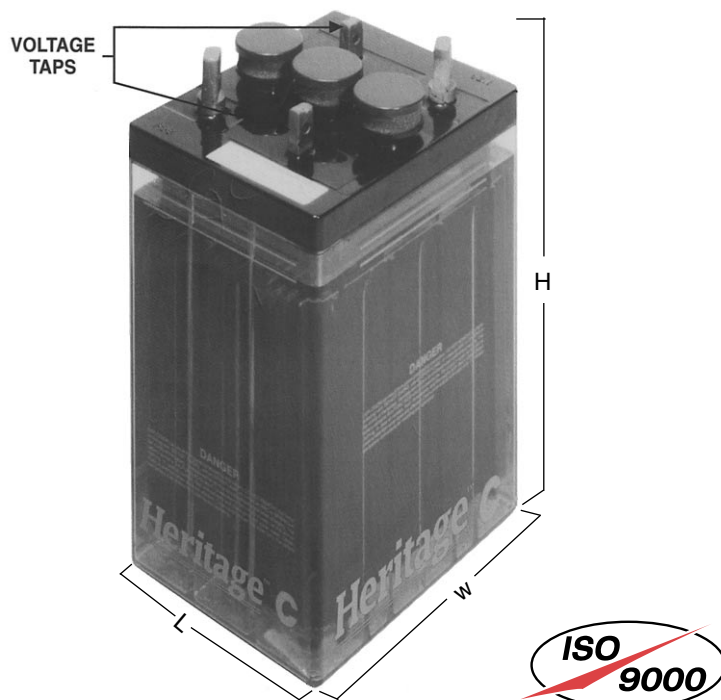

Description

The Heritage CA battery has been carefully engineered to meet the varying power needs of the utility market. The lead-antimony alloy grids maximize performance in high cycling applications. The alloy also enables the CA battery to tolerate higher temperatures than standard lead-calcium designs. This makes the CA battery ideal for challenging utility switchgear applications.

Its .280 inch positive grids are one of the thickest in the industry, making it an excellent long discharge battery. At the same time, its nearly square plate configuration enhances high rate performance. Coupling these two operating characteristics with multi-cell construction to minimize floor space, makes the CA battery ideally suited for multi-power profile requirements of the utility market.

The Heritage CA battery will also allow for individual cell monitoring through voltage taps (posts) on each cell. Usually sealed multi-cell jars do not allow this sort of monitoring due to intercell connections being contained within the jar. This ease of maintenance feature, along with the excellent design and performance features make the CA the battery of choice for utility switchgear applications.

Features

- Long Life - 20 Year Life Expectancy.
- Economical - Lowest initial cost.
- Construction - Flat plate Lead-Antimony alloy grids.
- Application - Float applications, tolerant of high ambient temperatures on limited basis.
- Capacities - 50 to 200 Ah nominal.
- Performance - Optimized performance for discharges from 1 minute to 8 hours duration. Well suited for demanding complex load profiles with exceptionally high initial and ending currents separated with moderate constant-current demand.
- Battery cover made of Flame Retardant ABS (UL1778 and UL94 VO/L.O.I. 28% as Standard.

MODEL

EXIDE

CA

50-200Ah

APPLICATIONS:

**SWITCHGEAR
UTILITIES
COMMUNICATIONS**

Specifications

PLATE THICKNESS:

POSITIVE: 0.28 in/7.1 mm

NEGATIVE: 0.21 in/5.3 mm

PLATE DIMENSIONS:

Height Width

POS: 7.75 in/197 mm 8.00 in/203 mm

NEG: 7.75 in/197 mm 8.00 in/203 mm

SEDIMENT SPACE: 1.0 in/25.4 mm

ELECTROLYTE OVER PLATES:

1.5 in/38.1 mm

CONTAINER:

Styrene Acrylonitrile Copolymer

COVER: Made from Flame Retardant ABS (UL94 VO/L.O.I. 28%)

SEPARATORS: Microporous rubber

RETAINERS: "Vitrex" - glass fiber

POST TYPE: Single Post with individual cell voltage taps.

POST SEAL TYPE: Compression rubber bushing, epoxy sealed.

PLATE SUSPENSION TYPE:

POSITIVE: Bottom supported

NEGATIVE: Bottom supported

VENT TYPE:

Flame Arrestor, Fused Alumina

FLOAT VOLTAGE SETTING:

ACCEPTABLE MIN/MAX : 2.15/2.22 VPC

RECOMMENDED: 2.20 VPC

SPECIFIC GRAVITY: 1.215

BOLT CONNECTORS:

Stainless Steel, Standard English

Measure, Hex-Head

INTERCELL CONNECTORS:

Lead-Plated Copper

Capacities - Dimensions - Weights

TYPE*	NOM. Ah CAP.	OVERALL DIMENSIONS						WEIGHTS - VOLUMES								OUTLINE DRAWING SEE CATALOG SECTION
		LENGTH (L)**		WIDTH (W)		HEIGHT (H)		UNPACKED		DOMESTIC PACKED		ELECTROLYTE ONLY 1.215 S.G.				
		in	mm	in	mm	in	mm	lbs	kgs	lbs	kgs	lbs	kgs	gal	ℓ	
2CA-3	50	7.0	178	9.0	229	13.4	340	38	17.2	43	19.5	13	5.9	1.3	4.8	57.20
3CA-3	50	7.0	178	9.0	229	13.4	340	53	24.0	59	26.8	20	9.1	2.0	7.5	
2CA-5	100	7.0	178	9.0	229	13.4	340	47	21.3	52	23.6	10	4.5	1.0	3.7	
3CA-5	100	7.0	178	9.0	229	13.4	340	68	30.8	73	33.1	17	7.7	1.7	6.4	
2CA-7	150	12.2	310	9.0	229	13.4	340	74	33.6	83	37.6	23	10.4	2.3	8.6	
3CA-7	150	12.2	310	9.0	229	13.4	340	104	47.2	112	50.8	32	14.5	3.2	12.0	
2CA-9	200	12.2	310	9.0	229	13.4	340	85	38.6	92	41.7	22	10.0	2.2	8.2	
3CA-9	200	12.2	310	9.0	229	13.4	340	121	54.9	130	59.0	31	14.1	3.1	11.6	

* Prefix Number indicates cells per unit. Suffix number indicates total plates per cell.

** 0.50" must be added between units for spacing purposes when calculating total battery length.

AVERAGE CELL PERFORMANCE DATA* (Discharge Rates in Amperes**)

TYPE	NOM. Ah CAP. ¹	72 HR	24 HR	12 HR	8 HR	5 HR	4 HR	3 HR	2 HR	1.5 HR	1 HR	30 MIN	15 MIN	1 MIN	1 MIN to 1.50 VPC ²
	TO 1.75 END VOLTS PER CELL														
2CA-3	50	0.9	2.5	4.4	6.3	8.8	10.4	12.8	16.8	20.2	26	35	45	69	129
3CA-3	50	0.9	2.5	4.4	6.3	8.8	10.4	12.8	16.8	20.2	26	35	45	69	129
2CA-5	100	1.9	5.0	8.8	12.5	17.6	20.7	25.6	33.6	40.4	51	70	89	136	254
3CA-5	100	1.9	5.0	8.8	12.5	17.6	20.7	25.6	33.6	40.4	51	70	89	136	254
2CA-7	150	2.8	7.5	13.2	18.8	26.4	31.0	38.4	50.4	60.6	78	105	133	201	375
3CA-7	150	2.8	7.5	13.2	18.8	26.4	31.0	38.4	50.4	60.6	78	105	133	201	375
2CA-9	200	3.8	10.0	17.6	25.0	35.2	41.4	51.2	67.2	80.8	104	140	177	264	490
3CA-9	200	3.8	10.0	17.6	25.0	35.2	41.4	51.2	67.2	80.8	104	140	177	264	490


*Ampere values listed represent 100% of the cell's capacity. Initial capacity shall be a minimum of 90% of these values per IEEE 450.

**1.215 S.G. electrolyte at 77° F (25° C) includes intercell connector drop.

¹Nominal AMP hour capacity at the 8 hour rate.

²One minute rates to 1.50 VPC should only be used for short circuit calculations and not as performance data.

All data subject to change without notice.

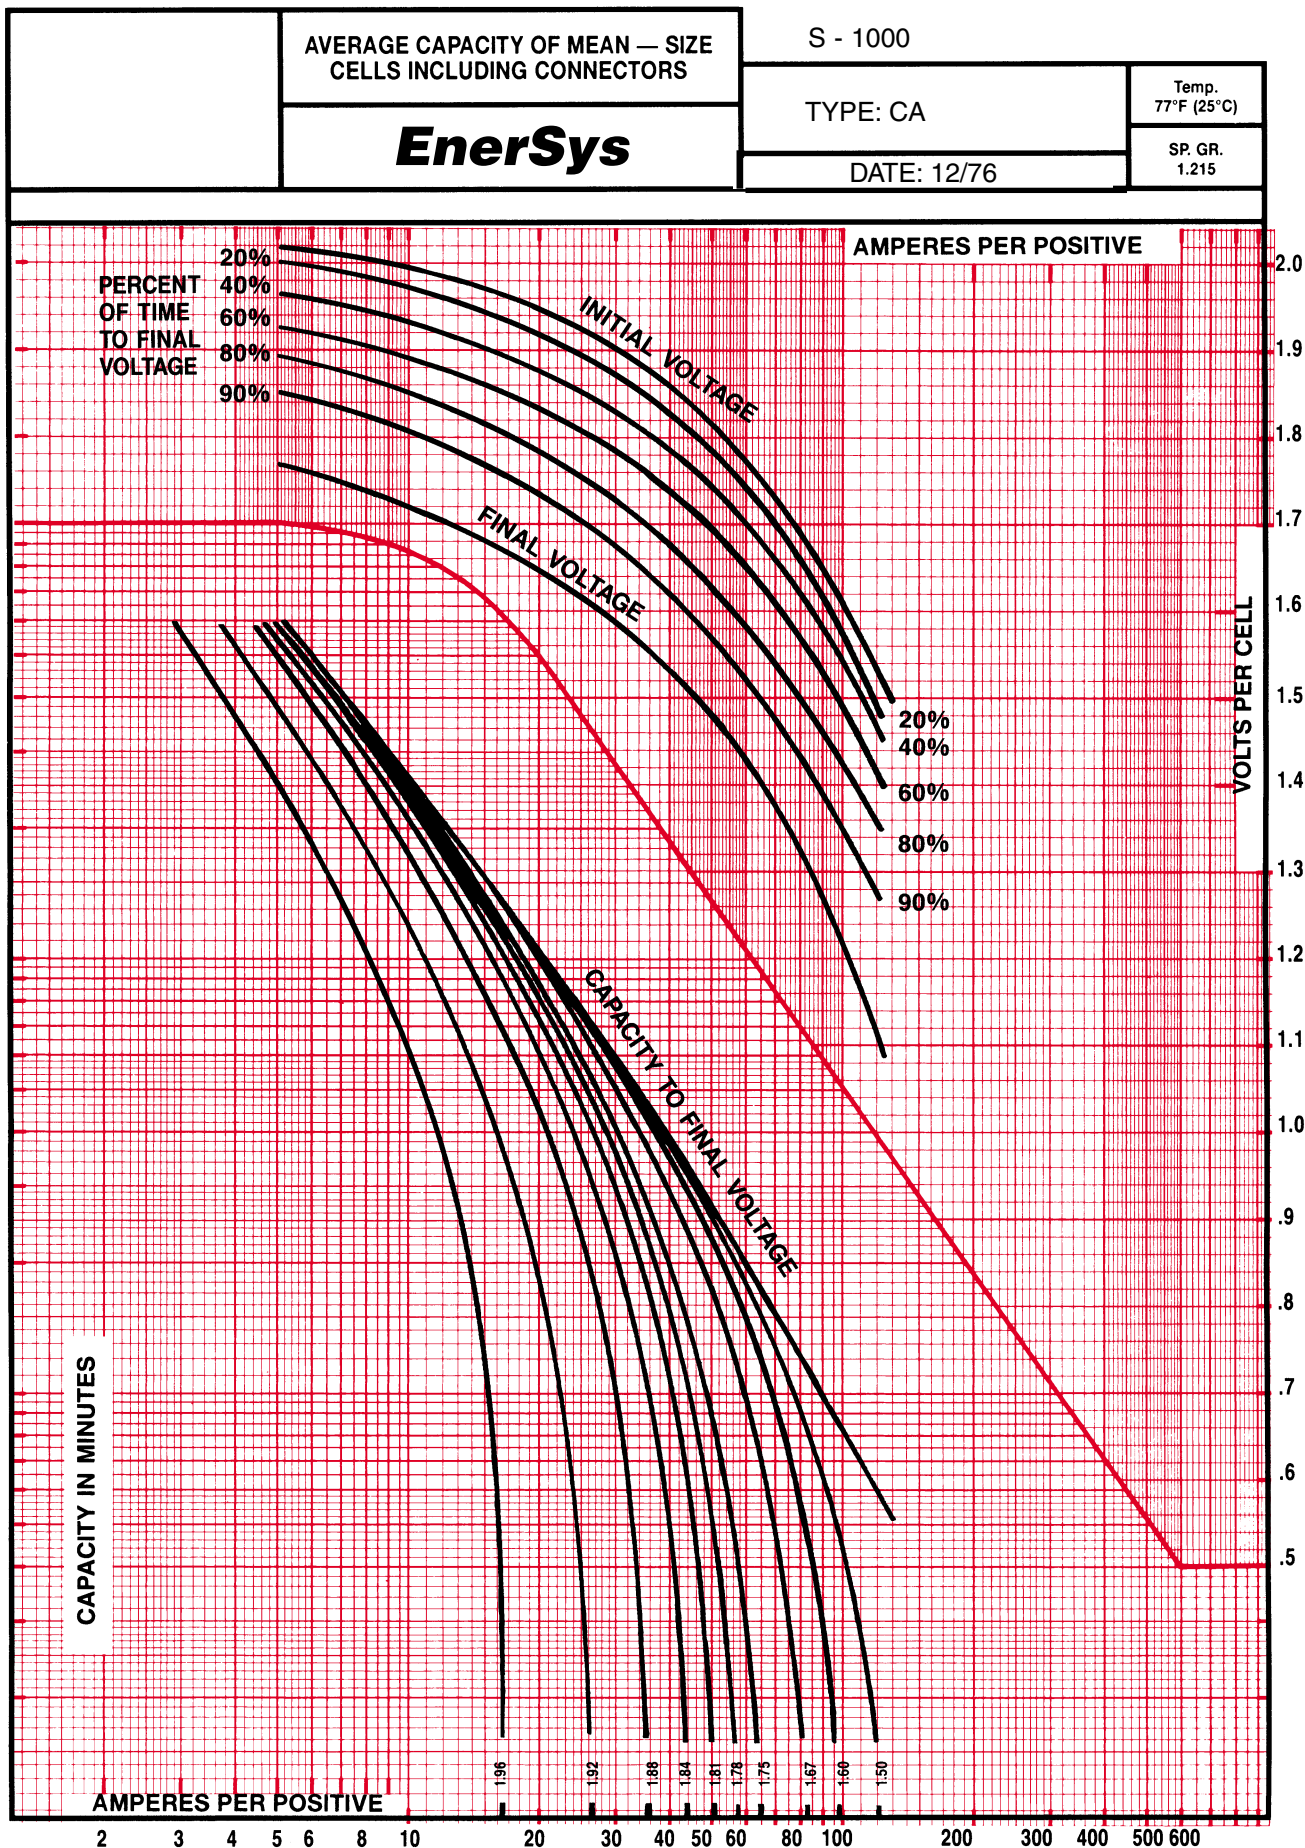

Accessories

		CATALOG NUMBER
†PORTABLE HYDROMETER		81332
†HYDROMETER HOLDER - WALL MOUNT		27717
†THERMOMETER (Portable or Funnel-Type		27167
Flame Arrestor Mounting)		802360
†CELL NUMBER SET	1-12	802361
	1-24	802362
	1-60	802363
	1-120	802364
	1-240	802365
	1-300	62260
§CELL LIFTING DEVICE:		81099
FLAME ARRESTOR (Supplied With Each Cell)		

†Included with 12 or more cells

§Extra cost

For complete information about these and all other accessories, see Catalog **SECTION 80.05**.

NOTE: All inter-cell, inter-tier, inter-step, end-to-end inter-rack, back-to-back inter-rack connectors, terminal lugs, and terminal plates are included with every battery. Across-aisle inter-rack connectors are not included.

All data subject to change without notice.

Represented by:

When ordering new batteries, also remember to properly recycle your old lead batteries. Federal and state regulations require lead-acid batteries be recycled. EnerSys' nationwide service organization can arrange pickup, transportation to and recycling at any one of our company affiliated smelters. Call 1-800-972-7372 for more information.



EnerSys

Power/Full Solutions

Corporate Office: P.O. Box 14145, Reading, PA 19612-4145
610-208-1991 • 800-538-3627
FAX 610-372-8613

Sales Offices
Eastern Region: 215-491-3700 • 800-346-4402
FAX 215-491-2304

Western Region: 510-887-2046 • 888-887-2046
FAX 510-887-6309

International: 610-208-1847
FAX 610-208-1851

EnerSys Canada: 905-790-1212
FAX 905-790-7070

EnerSys Argentina: 54-1-736-3000
FAX 54-1-736-3200

EnerSys de Mexico: 52-83-656-620
FAX 52-83-656-621

Acumuladores Narvit S.A., Brazil: 55-11-6412-7522
FAX 55-11-6481-4019

Visit us on the web at: www.enersysstationary.com

Please check our website for literature updates