

Hydrokit Water Resistant Sealing

Godfrey Hirst

New Zealand

Hydrokit

Hydrokit is a high-quality waterproof, transparent and elastic one-component joint sealant (based on silicones).

- Ideal for watertight sealing of connection joints between skirting boards, walls and laminate.
- Perfect for watertight sealing of trim profiles.
- Perfect solution for Godfrey Hirst laminate.
- In general: excellent adhesion to laminate, timber, aluminum (profiles), MDF, melamine, PVC.
- UV-resistant: maintains adhesion and consistency in UV-light.



Sealant Tube (460793)

Characteristics

Permanent elasticity, easy to apply, water resistant, neutral, low odor and non-corrosive.
Frost free: resistant to temperatures between -60° and +180°C.

Usage

12 m/tube (joint 0.5 x 0.5 cm)

Storage life

Shelf life min. 15 months after production date (refer to batch code) if stored unopened in a cool dry place.

Compressive Foam Rod (460795)

Expanded Foam

Use expanded foam to close the expansion gap and avoid excessive use of Hydrokit.



Hydrokit Water Resistant Sealing



Godfrey Hirst

New Zealand

Hydrokit

Installation Instructions


- Apply Hydrokit using a caulk gun on a clean, dry, dust-free and grease-free surface; then smooth with a putty knife.
- The Hydrokit should preferably be applied at temperatures between +5°C and +30°C.
- Maximum expansion of 25%.
- Please ensure all wet area room treatments have an expansion trim installed at all doorway interfaces.

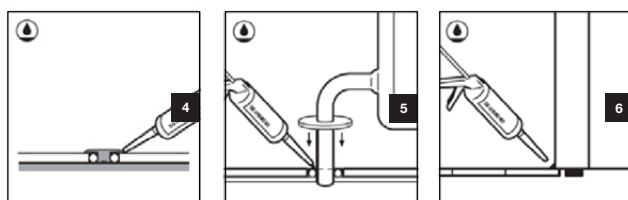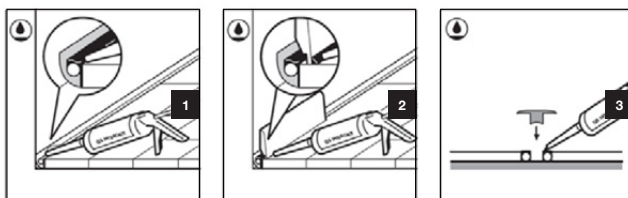


Applications for Expanded Foam and Hydrokit Sealant:

Please see detailed drawings of different profile treatments


Wall Base

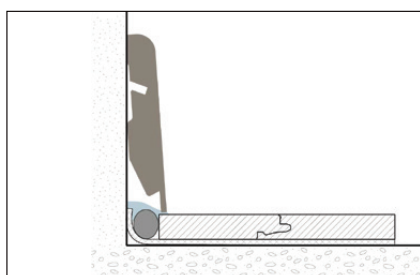


Door Frame

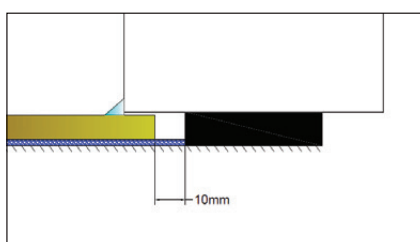

Expansion T Section

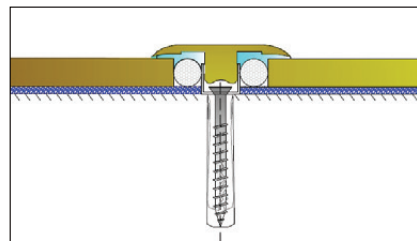

Expansion End Section

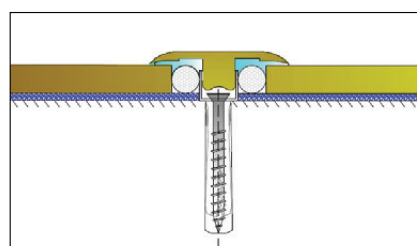

Expansion End Section

