



**INDUSTRIAL DIESEL ENGINE** 

# KUBOTA EA SERIES (1-cylinder) EA330-E4-NB1

## RATED POWER


## 5.15kW@3000rpm





Photograph may show non-standard equipment.

### PERFORMANCE CURVE

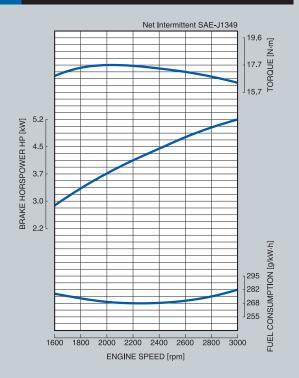

#### FEATURES and BENEFITS

#### **Emissions**

The Kubota EA330 engine complies with EPA Tier 4 emissions regulations. These are the most stringent emissions regulations in the world in this class.

Kubota engine less than 19kW meets emission standards over the NRTC and also meets the NTE requirements.

#### **Durable Power**

The Kubota EA330 engine has been chosen as the power source for a variety of applications.

Combustion chamber with TVCS (Three Vortex Combustion System) provides stable performance even at high engine rpm. And because of the extra displacement for its output, work goes surely and steadily.

#### **Clean and Quiet Power**

Kubota's original TVCS (Three Voltex Combustion System) provides ideal mixture of air and fuel, and enables low fuel consumption.


## KUBOTA EA SERIES EA330-E4-NB1


## **GENERAL SPECIFICATION**

		Net Intermittent SAE-J1349
Model		EA330-E4-NB1
Emission Regulation		Tier 4
Туре		Horizontal 4-cycle liquid cooled Diesel
Number of Cylinders		1
Bore	mm (in)	77 (3.03)
Stroke	mm (in)	70 (2.76)
Displacement	L (cu.in)	0.325 (19.83)
Combustion System		IDI (TVCS)
Aspiration		Naturally Aspirated
Maximum Speed	rpm	3000
Output: Net Intermittent	kW	5.15
	hp	6.9
	ps	7.0
Oil Pan Capacity	L (gal)	1.3 (0.34)
Starter Capacity	V-kW	12-0.8
Alternator Capacity	V-A	12-3.5
Length	mm (in)	566 (22.28)
Width	mm (in)	411 (16.18)
Height (1)	mm (in)	457 (17.99)
Dry Weight	kg (lb)	54 (119)
*Consideration in subject to shows without notice		

<sup>\*</sup>Specification is subject to change without notice. \*Output: Net Intermittent SAE-J1349

## **DIMENSIONS**

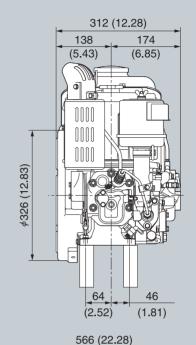

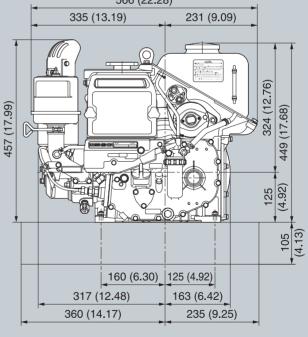

## For Earth, For Life Kubota

<sup>\*</sup>Dry weight is according to Kubota's standard specification.

When specification varies, the weight will vary accordingly.