


## J-Series Power Units 62 - 127 hp

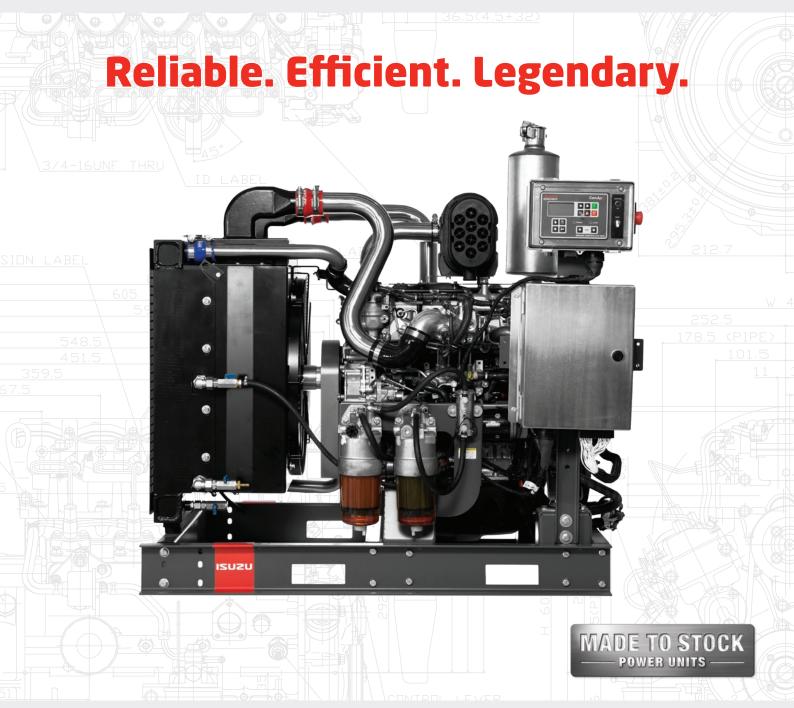

Isuzu Power Solutions MTS Power Units / Ready-to-work / Unrivalled performance and fuel efficiency / Designed and assembled in Australia for Australian conditions / Rigorously tested / Premium options available

#### Isuzu J-Series Engine Models / 4JG1 (62 hp) / 4JJ1T (82 hp) / 4JG1T (84 hp) / 4JJ1X (127 hp)

Applications / Agricultural / General Industry / Hydraulic Pump / Irrigation / Refrigeration / Water Pump

## **Reliable. Efficient. Legendary.**

## Key Features and Benefits

- Genuine Japanese made Isuzu engine.
- Low fuel consumption, low noise, low maintenance.
- Suits a wide variety of applications.
- Locally developed accessories suitable for tough Australian applications.
- Reliable power you can depend on.
- Supported by the extensive Isuzu dealer network.

#### Standard Inclusions (MTS)

- Heavy duty cooling package featuring all-aluminium bar and plate construction (50°C+ rating).
- Engine Controller PRO with IP65 rating for complete engine monitoring and protection.
- Industrial or residential grade exhaust system.
- Premium Donaldson air cleaner with air filter service indicator.
- Australian designed and manufactured skid and engine mounts.
- Premium adjustable mechanical or electronic throttle.

## Available Options\*

- Longer application skid for mounting of auxiliary items (eg. pump).
- Heavy duty dual element air cleaning systems.
- Extension harnesses.
- Premium pressure transducer range.
- 4G remote monitoring and control kit.
- Low coolant alarm protection kit.
- 160W solar battery charging kit.


598.5					
Engine Model		90.5 <b>4JG1-PK</b>	4JJ1-TYBW01	4JG1-TPW01	4JJ1-XYBW01
Cylinders		4	4	4	4
Displacement		3.1 L	3.0 L	3.1 L	3.0 L
Rated Power hp (kW) @ RPM	1800	49.7 (37.1)	70.8 (52.8)	66.5 (49.6)	-
	1900	51.5 (38.4)	73.8 (55.0)	69.7 (52.0)	-
	2000	53.0 (39.5)	76.4 (57.0)	72.4 (54.0)	114.6 (85.5)
	2100	55.0 (41.0)	79.1 (59.0)	75.8 (56.5)	118.0 (88.0)
	2200	57.0 (42.5)	80.5 (60.0)	79.1 (59.0)	123.4 (92.0)
	2300	58.0 (43.3)	80.7 (60.2)	80.5 (60.0)	124.7 (93.0)
	2400	60.0 (44.7)	81.1 (60.5)	83.1 (62.0)	126.1 (94.0)
	2500	61.5 (45.9)	81.8 (61.0)	83.8 (62.5)	127.4 (95.0)
	2600	62.0 (46.2)	-	-	-
Max. Torque		195 Nm @ 1800 RPM	280 Nm @ 1800 RPM	263 Nm @ 1800 RPM	408 Nm @ 2000 RPM
Fuel Consumption <sup>1</sup> @ 100% Load		13.6 L/h	16.4 L/h	18.3 L/h	23.6 L/h
Fuel Injection		Mechanical	Common Rail	Mechanical	Common Rail
Emission Compliance		Tier-2	Tier-3	Tier-2	Tier-3
Flywheel / Housing		SAE 10" / SAE #4	SAE 10" & 11.5" / SAE #3	SAE 10" / SAE #4	SAE 10" & 11.5" / SAE #3
O/A Dimensions (L x W x H) <sup>2</sup>		1150 x 800 x 1330 mm	1400 x 970 x 1470 mm	1160 x 800 x 1490 mm	1400 x 970 x 1500 mm
O/A Weight (Dry) <sup>2</sup>		350 kg	510 kg	360 kg	570 kg

<sup>1</sup> Fuel consumption based on diesel fuel with a specific gravity of 0.835 kg/m3 at 15 degrees C. Actual figures may vary. <sup>2</sup> Values are approximates only.



All Made-To-Stock (MTS) Power Units are locally assembled, tested and ready to work.

# **MTS Specifications**

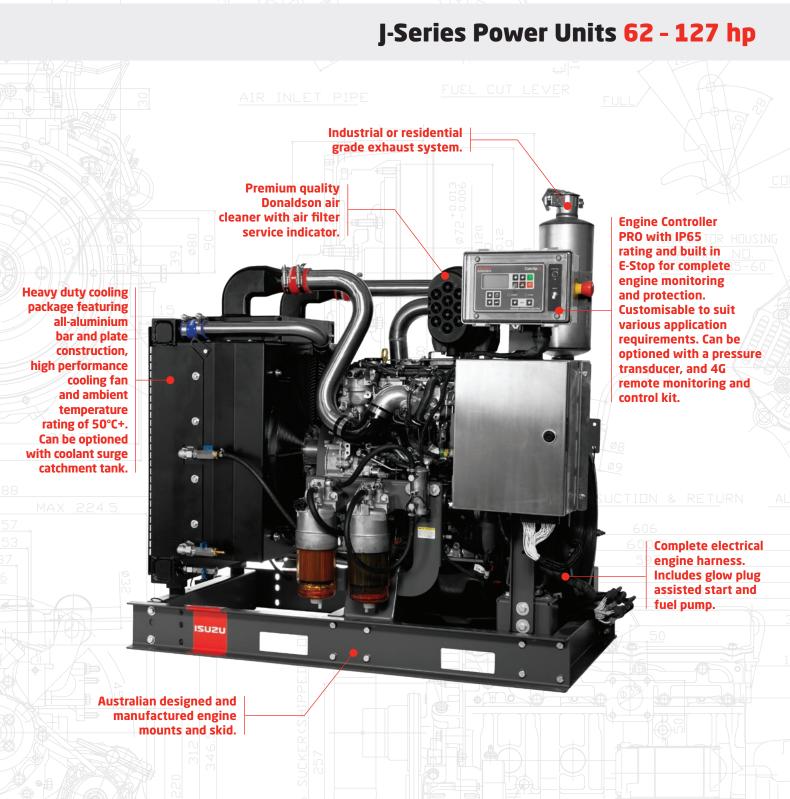

#### DIAS

Isuzu Power Solution's state-of-the-art Diesel Inquiry Assessment System (DIAS) is designed to match every customer with their ideal power unit.

DIAS will take you through a series of easy to answer questions that highlights your needs, environment and application; ensuring you receive the right product to provide you with trouble free operation for many years to come.

For more information, talk to an Isuzu dealer today.


### **Custom Engineering**


From the city to the outback, Isuzu Power Solutions can be found in the heart of most Original Equipment Manufacturer (OEM) applications. Our dedicated engineering team can provide customised solutions to suit various application requirements and needs.

From design to commissioning, custom cooling packages, engine speed and pressure control and everything in between, our engineering team is ready for the challenge.

Contact us to find out how we can help design and deliver a solution for your application.

### Isuzu Rated Power Band

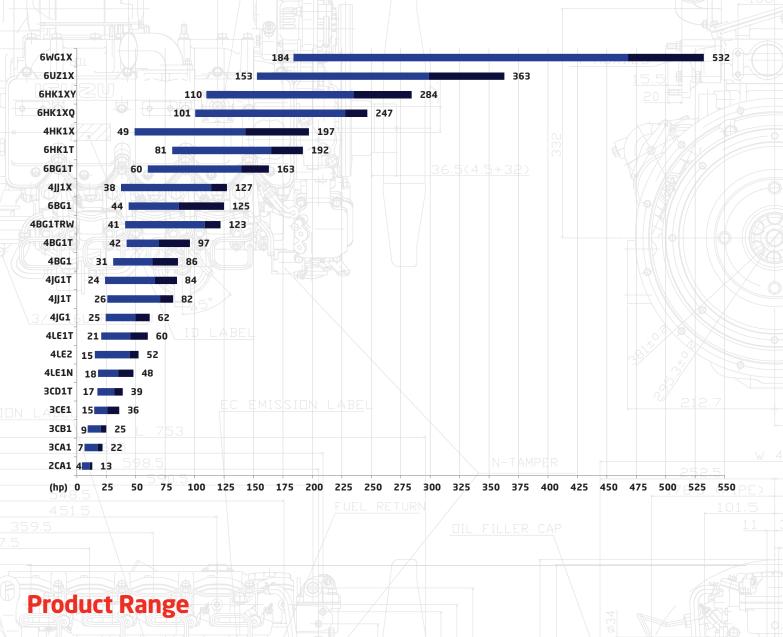

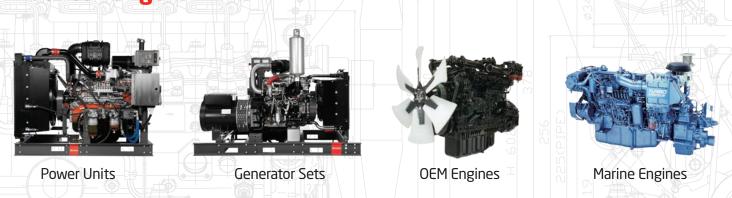

#### **Contact Us**

For more information, visit us at www.powersolutions.isuzu.com.au

#### Disclaimer

\*Note, some options may not be available on all engine models. Some options are already standard fitment on some engine models. Our goods and services come with guarantees that cannot be excluded under the Australian Consumer Law. For major failures with the service, you are entitled: To cancel your service contract with us; and to a refund for the unused portion, or to compensation for its reduced value. You are also entitled to choose a refund or replacement for major failures with goods. If a failure with the goods or a service does not amount to a major failure, you are entitled to have the failure rectified in a reasonable time. If this is not done you are entitled to a refund for the goods or a service the service and obtain a refund of any unused portion. You are also entitled to be compensated for any other reasonably foreseeable loss or damage from a failure in the goods or service. This warranty is given by lsuzu Australia Limited, ABN 97 006 962 572 (1/LL) whose business address is 66 Foundation Road, Truganina, VIC 3029. IAL's telephone number is 1800 035 640. For further information on lsuzu warranties please visit www.powersolutions.isuzu.com.au. The information in this leaflet was correct at time of printing, but all measurements, specifications and equipment are subject to change without notice. Some equipment may have been changed and/or is available at extra cost. IAL may make changes at any time without notice, in prices, colours, materials, equipment and models. IAL makes all reasonable tatempts to ensure the availability of all engines and equipment. The information in this leaflet is general in nature. Your Isuzu dealer can confirm all measurements, specifications and engine/equipment availability upon request. ARK001 08/05 V09