



Engine pictured with optional equipment

CAT® ENGINE SPECIFICATIONS

I-4, 4-Stroke-Cycle Diesel

Bore	84.0 mm (3.3 in.)
Stroke	100.0 mm (3.9 in.)
Displacement	2.216 L (135.0 in ³)
Aspiration	Turbocharged
Compression Ratio	23.3:1
Combustion System	Indirect injection
Rotation (from flywheel end)	Counterclockwise
Capacity for Liquids	
Cooling System	6.98 L (7.4 U.S. qts.)
Lube Oil System (refill)	10.6 L (11.2 U.S. qts.)
Engine Weight, Net Dry (approximate)	
with standard equipment	228 kg (502 lbs.)

FEATURES

Emissions

Meets 2008 Tier 4 Interim, Stage IIIA emissions requirements. Tier 4 Interim refers to EPA (U.S.) standards. Stage IIIA refers to European standards.

Reliable, Quiet, and Durable Power

World-class manufacturing capability and processes coupled with proven core engine designs assure reliability, quiet operation, and many hours of productive life.

High Performance

This radiator-cooled package delivers impressive performance up to a 3000 rpm rating.

Fuel Efficiency

Fuel consumption optimized to match operating cycles of a wide range of equipment and applications.

Broad Application Range

Industry leading range of factory configurable ratings and options for agricultural, materials-handling, construction, mining, aircraft ground support, and other industrial applications.

Package Size

Ultra-compact package size ensures ease of installation as well as exceptional power density. Radiators have been designed and air filters positioned for easy installation.

Low-Cost Maintenance

Single-side servicing improves ease of maintenance and simplifies the servicing routine. Service intervals at 500 hours are standard.

Testing

Every Cat® engine is quality tested to ensure proper engine performance.

World-class Product Support Offered Through Global Cat Dealer Network

- Scheduled maintenance
- Customer Support Agreements (CSA)
- Cat Extended Service Coverage (ESC)
- Superior dealer service network
- Extended dealer service network through the Cat Industrial Service Distributor (ISD) program

STANDARD EQUIPMENT

Air Inlet

Inlet manifold

Control System

Alternator 12 volt 65 amp, starter motor 12 volt, glow plug starting aid

Cooling System

Belt-driven coolant pump, coolant temperature switch, mounted air cleaner, mounted radiator and fan

Flywheels and Flywheel Housing

SAE No. 7 1/2 flywheel, SAE No. 4 flywheel housing

Fuel System

Fuel injection pump, fuel filter, Electronic Shut-off Solenoid (ESOS)

Lube System

Spin-on lube oil filter, lube oil pressure switch, lube oil sump

Power Take Off

Provision for timing case rear facing PTO

General

Cast iron engine block, cast iron exhaust manifold — side outlet, cold start capability to -20° C (-4° F), gradeability 35° Continuous

Web Site: For additional information on all your power requirements, visit www.cat-industrial.com.




Industrial Power Unit

C2.2

41.7 bkW/55.9 bhp


PERFORMANCE DATA

Turbocharged — 2800 rpm

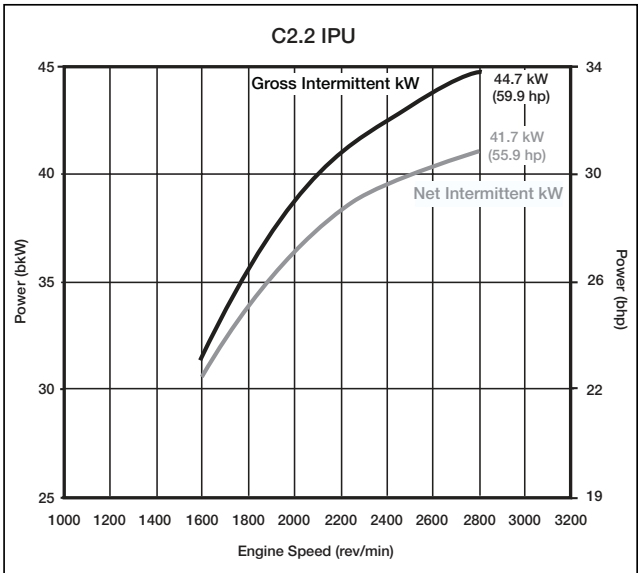

Speed rpm	Power bkW	Torque N·m	Power bhp	Torque lb·ft
2800	41.7	187.0	55.9	137.9

DIMENSIONS

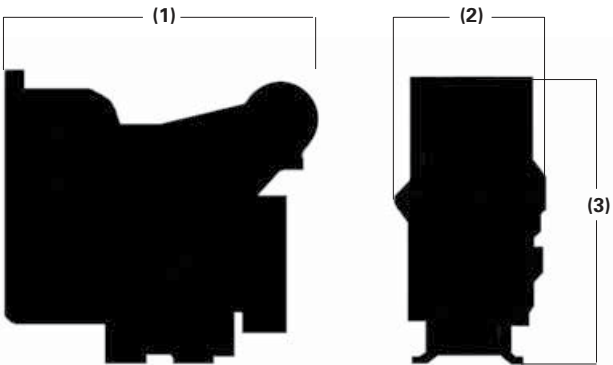

(1) Length	973 mm (38.3 in.)
(2) Width	590 mm (23.23 in.)
(3) Height	973 mm (38.3 in.)

Note: Dimensions depend on final specifications.

RATING DEFINITIONS AND CONDITIONS

IND-C (Intermittent) is the horsepower and speed capability of the engine where maximum power and/or speed are cyclic (time at full load not to exceed 50%).

Additional ratings are available for specific customer requirements. Consult your Cat dealer.

Rating Conditions for Diesel Engines — up to 6.6 liter are based on ISO/TR14396, inlet air standard conditions with a total barometric pressure of 100 kPa (29.5 in. Hg), with a vapor pressure of 1 kPa (.295 in. Hg), and 25°C (77°F). Performance is measured using fuel to specification EPA 2D 89.330-96 with a density of 0.845-0.850 kg/L @ 15°C (59°F) and fuel inlet temperature 40°C (104°F).

Materials and specifications are subject to change without notice. The International System of Units (SI) is used in this publication. CAT, CATERPILLAR, their respective logos, "Caterpillar Yellow" and the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.