




DEUTZ DRIVE ENGINES

3 cylinder air/oil cooled diesel engine

F3L2011

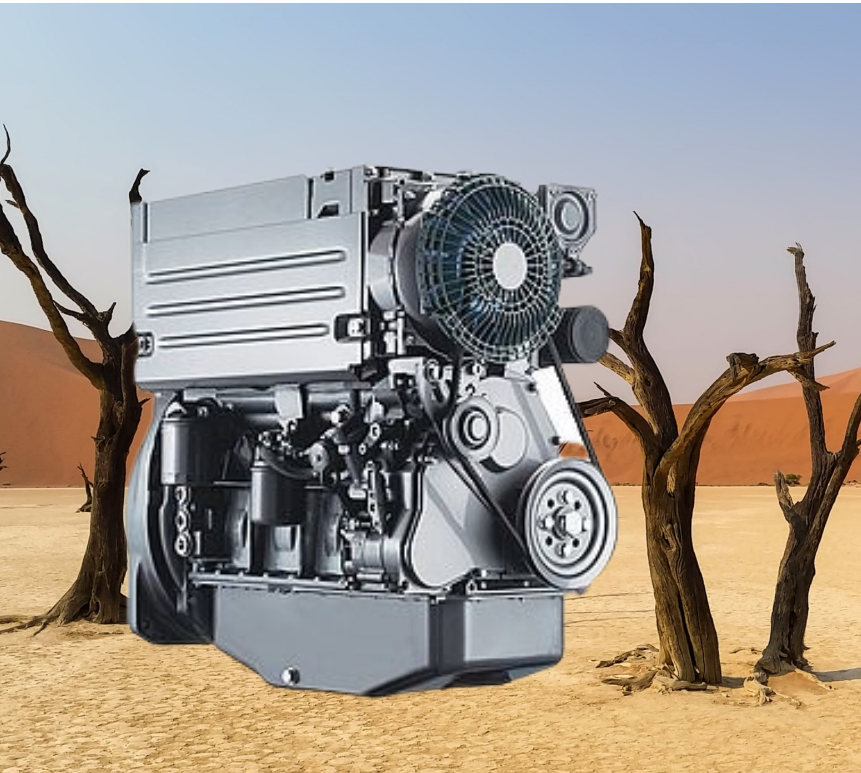

DEUTZ LOVE EXTREME

Air-cooled engines love extreme conditions. So if you've got the conditions, Deutz has the engine.



WHAT'S INCLUDED

- Integrated cooling system
- Mounted manifold muffler
- Mounted air cleaner
- Fuel filter
- Starter
- Alternator
- Solenoid
- Oil pressure switch
- Oil Filter
- Engine mountings
- Belt and fan guards

OPTIONAL EQUIPMENT

SHUTDOWN PANELS

- Kensho
Standard, Irrigation, Auto Start
- Murphy
Standard, Irrigation



ACCESSORIES

- PTO Stub Shafts
- PTO Clutches
- Side load Kits

Continuous HP Rating:

1500 rpm	1800 rpm	2000 rpm	2150 rpm	2300 rpm	2500 rpm	2600 rpm	2800 rpm
25.4	32.1	35.1	37.5	39.9	42.3	43.8	46.2



GENERAL SPECIFICATIONS

3 cylinder air/oil cooled diesel engine

F3L2011



Intermittent Power	48.7hp (35.8 kW) at 2800 rpm
Continuous Power	46.2hp (34.0 kW) at 2800 rpm
Number of Cylinders	3
Bore and Stroke	94 x 112 mm
Displacement	2.33 litre
Torque Maximum	130.0 Nm at 1700 rpm
Starter Capacity	12V
Alternator Capacity	14V - 60A
Bellhousing and Flywheel	SAE 4 x 8/10
Weight dry	252 kg