




DEUTZ DRIVE ENGINES

2 cylinder air/oil cooled diesel engine

F2L2011

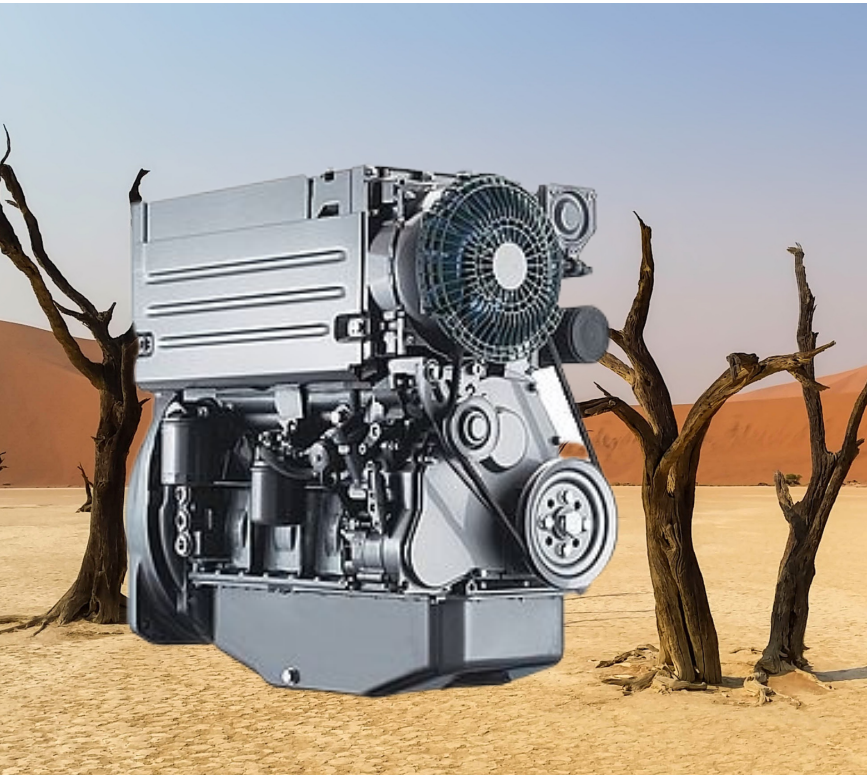

DEUTZ
LOVE EXTREME

*Air-cooled engines love extreme conditions.
So if you've got the conditions, Deutz has the engine.*



WHAT'S INCLUDED

- Integrated cooling system
- Mounted manifold muffler
- Mounted air cleaner
- Fuel filter
- Starter
- Alternator
- Solenoid
- Oil pressure switch
- Oil Filter
- Engine mountings
- Belt and fan guards

OPTIONAL EQUIPMENT

SHUTDOWN PANELS

Kensho
Standard, Irrigation, Auto Start
Murphy
Standard, Irrigation

ACCESSORIES

PTO Stub Shafts
PTO Clutches
Side load Kits



Continuous HP Rating:

1500 rpm	1800 rpm	2000 rpm	2150 rpm	2300 rpm	2500 rpm	2600 rpm	2800 rpm
16.3	20.9	22.8	24.4	26.0	27.5	28.4	29.6



GENERAL SPECIFICATIONS

2 cylinder air/oil cooled diesel engine

F2L2011



Intermittent Power	31.3hp (22.5 kW) at 2800 rpm
Continuous Power	29.6hp (21.8 kW) at 2800 rpm
Number of Cylinders	2
Bore and Stroke	94 x 112 mm
Displacement	1.55 litre
Torque Maximum	78.0 Nm at 1750 rpm
Starter Capacity	12V
Alternator Capacity	14V - 60A
Bellhousing and Flywheel	SAE 4 x 8/10
Weight dry	213 kg