


A modern public platform lift with a glass enclosure and a wooden staircase, installed in a hallway. The lift is a compact, enclosed unit with a glass door and a wooden staircase leading to an upper level. The hallway is brightly lit with recessed ceiling lights and has a polished floor. In the background, there are glass doors and a staircase with a metal railing.

PUBLIC PLATFORM LIFT

PREMIER



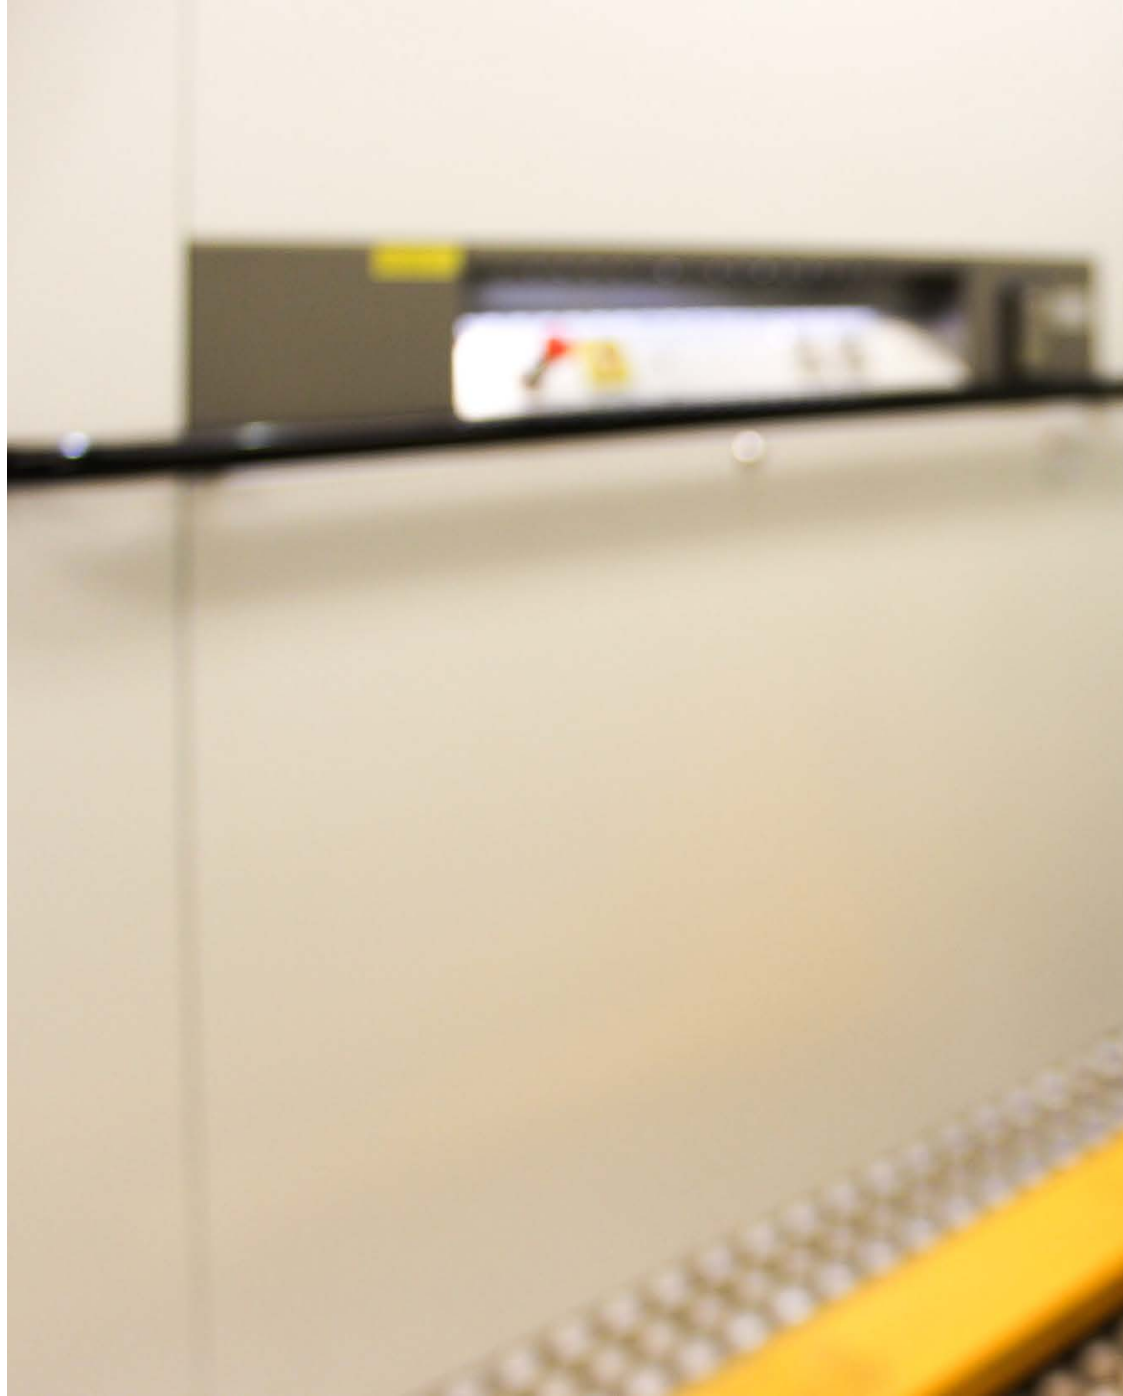


FULLY DDA / PART M COMPLIANT

Design, sizes and options tailored for public environments. Larger platform sizes can be fully Part M and Equality Act compliant



WIDE CHOICE OF FINISHES & OPTIONS

Possible options include: phones, different choices of flooring, locking, voice announcement, automatic door openers, level indicators, arrival bell, glazed shaft panels, lift painted in other RAL colours, elbow buttons, a mirror and more

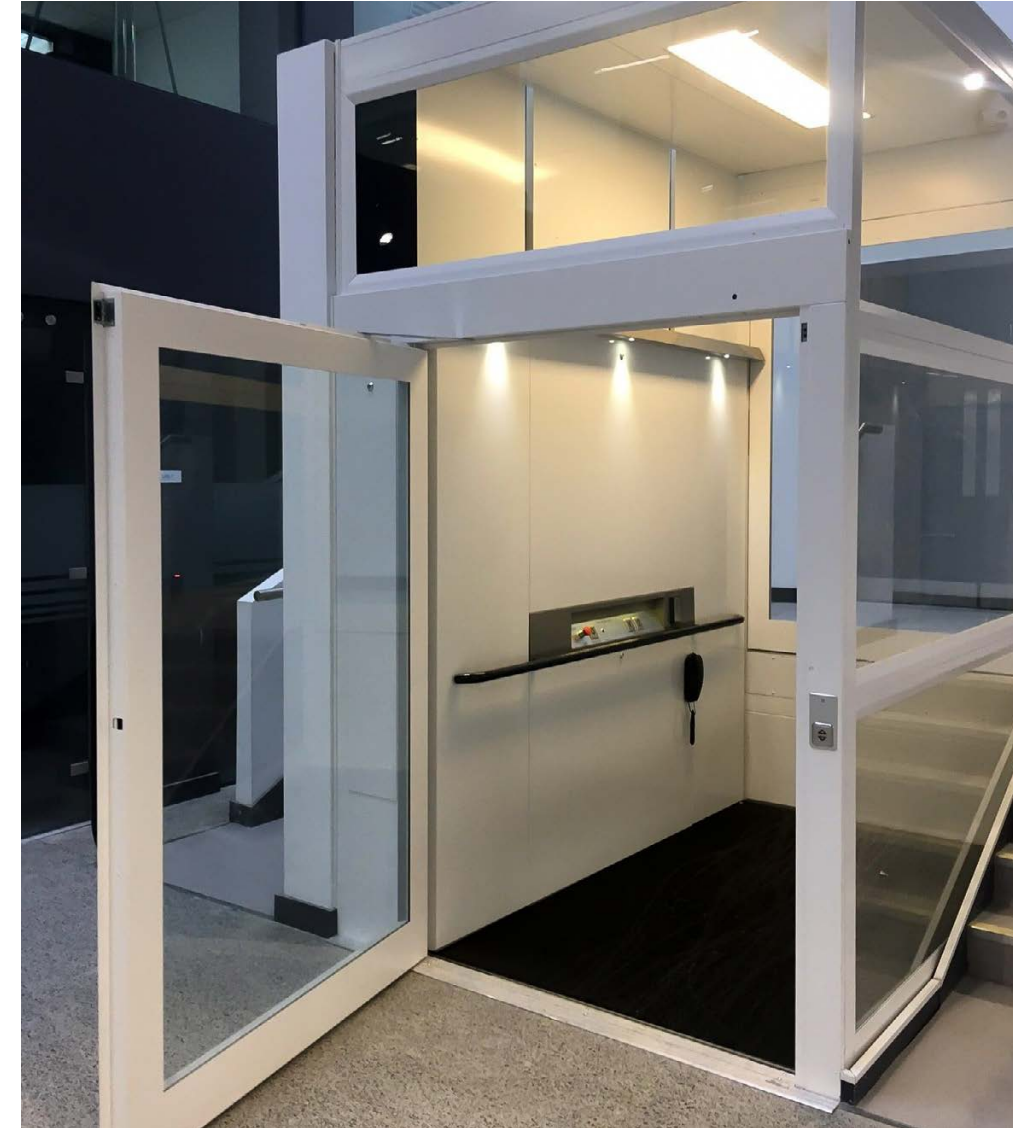

UP TO 1000KG LOAD CAPACITY

The Premier Platform lift is available in 2 capacities, 500kg & 1000kg.



SUITABLE FOR A RANGE OF ENVIRONMENTS

Platform lifts are our most frequently installed models for schools, office blocks, hospitals, care homes and retail due to size, weight capacity and compliance.



500KG

Our 500KG Platform Lift is the accomplished merge between economy and the best possible quality, with a load capacity of 500kg packed in a clean Scandinavian design.

- 30 different platform sizes
- Shaft pit of only 50mm (can be omitted with a ramp)
 - Compact lift dimensions for narrow spaces
- Soft start/stop as standard for the best possible comfort
 - Fire Rated EI 60 available
 - Simple To Install And Easy To Service
 - Overall low maintenance and running costs

500KG SPECIFICATION

Recommended installation	Indoors
Rated load	500 kg
Rated Speed	max 0,15 m/sec
Height limits	max travel height 13m top Height 2,3 m / 1,1m
Pit depth	50 mm (ramp 50mm optional)
Stops	5 stops
Standard platform sizes (w x d)	1000 x 1500 / 1100 x 1400 / 1100 x 1500 / 1100 x 1600
Standard lift dimensions (w x d)	1370 x 1580 / 1470 x 1480 / 1470 x 1580 / 1470 x 1680 *, **
Cut-out size	+ 30 mm on above
Other platform dimensions width	700 – 1100
Lift dimension (w)	+ 370 mm (+400 mm if door on B-side)
Other platform dimensions depth	1100 – 1600
Lift dimension (d)	+ 80 mm (if door on A & C +110mm)
Cut-out size	+ 30mm
Standard Shaft finish	Laminated sandwich panels in RAL 9003 (white) (T=25mm, H=565mm), Glazed panels optional.
Standard platform finish	RAL 9003 (white) All powder coated, other RAL colours available upon request, black rubber flooring.
Doors	Swing doors, doors can be on 3 sides
Drive system	Screw and nut
Control system	PLC
Power supply	380-400V 3-phase 50/60 Hz 16A, 230V 3-phase 50/60 Hz 16A frequency converter as standard *230V 1-phase 50/60 Hz 16A with frequency converter optional
Motor	2,2 kW
Battery emergency lowering	incl. as standard
Door buttons	one touch
Platform buttons	Hold to run All buttons with tactile and braille
Certification	MD 2006 / 42 / EC, EN81-41

* If door on side A & C=+30mm

** If door on side B, w=+30mm





1000KG

Our 1000KG Platform Lift, thanks to its great design, strong construction and flexibility fits into all environments, both public and industrial. Hospitals, care homes, arenas, schools, offices, workshops, furniture stores etc.

Everywhere where high quality, design, space and lifting capacity are crucial aspects.

- 55 different platform sizes to choose from
- Shaft pit of only 110mm (can be omitted with a ramp)
 - Full height platform back as standard
 - Fully glazed doors as standard
- Integrated spotlights included on the platform
 - Fire Rated EI 60 available
- Simple To Install And Easy To Service
- Overall low maintenance and running costs

1000KG SPECIFICATION

Recommended installation	Indoors
Rated load	1000 kg
Rated Speed	max 0,15 m/sec
Height limits	max travel height 13m top Height 2,3 mm
Pit depth	110 mm
Stops	5 stops
Standard platform sizes (w x d)	1400 x 2000 / 1400 x 2500 / 1100 x 2200
Standard lift dimensions (w x d)	1830 x 2080 / 1830 x 2580 / 1530 x 2280 *, **
Cut-out size	+ 30 mm on above
Other platform dimensions width	1000 - 1400
Lift dimension (w)	+ 430 mm (+460 mm if door on B-side)
Other platform dimensions depth	1500 - 2500
Lift dimension (d)	+ 80 mm (if door on A & C +110mm)
Cut-out size	+ 30mm
Standard Shaft finish	Laminated sandwich panels in RAL 9003 (white) (T=25mm, H=565mm), Glazed panels optional.
Standard platform finish	RAL 9003 (white) All powder coated, other RAL colours available upon request, black rubber flooring.
Doors	Swing doors, doors can be on 3 sides
Drive system	Screw and nut
Control system	PLC
Power supply	380-400V 3-phase 50/60 Hz 16A, frequency converter
Motor	4 kW
Battery emergency lowering	incl. as standard
Door buttons	one touch
Platform buttons	Hold to run All buttons with tactile and braille
Certification	MD 2006 / 42 / EC

* If door on side A & C=+30mm

** If door on side B, w=+30mm






SIMPLE INSTALLATION

Installation is simple as building work is minimal, just a low pit is required, and headroom requirements are very low. We work to provide a speedy installation, with minimal interference to your building or the surrounding area, making sure that you get to carry on with your daily life.

INSTALLATIONS ACROSS IRELAND

Premier takes a personal approach to each project. From bespoke technical drawings to swift and tidy installation, we strive to ensure that all your requirements and ideas are reflected in the finished product.

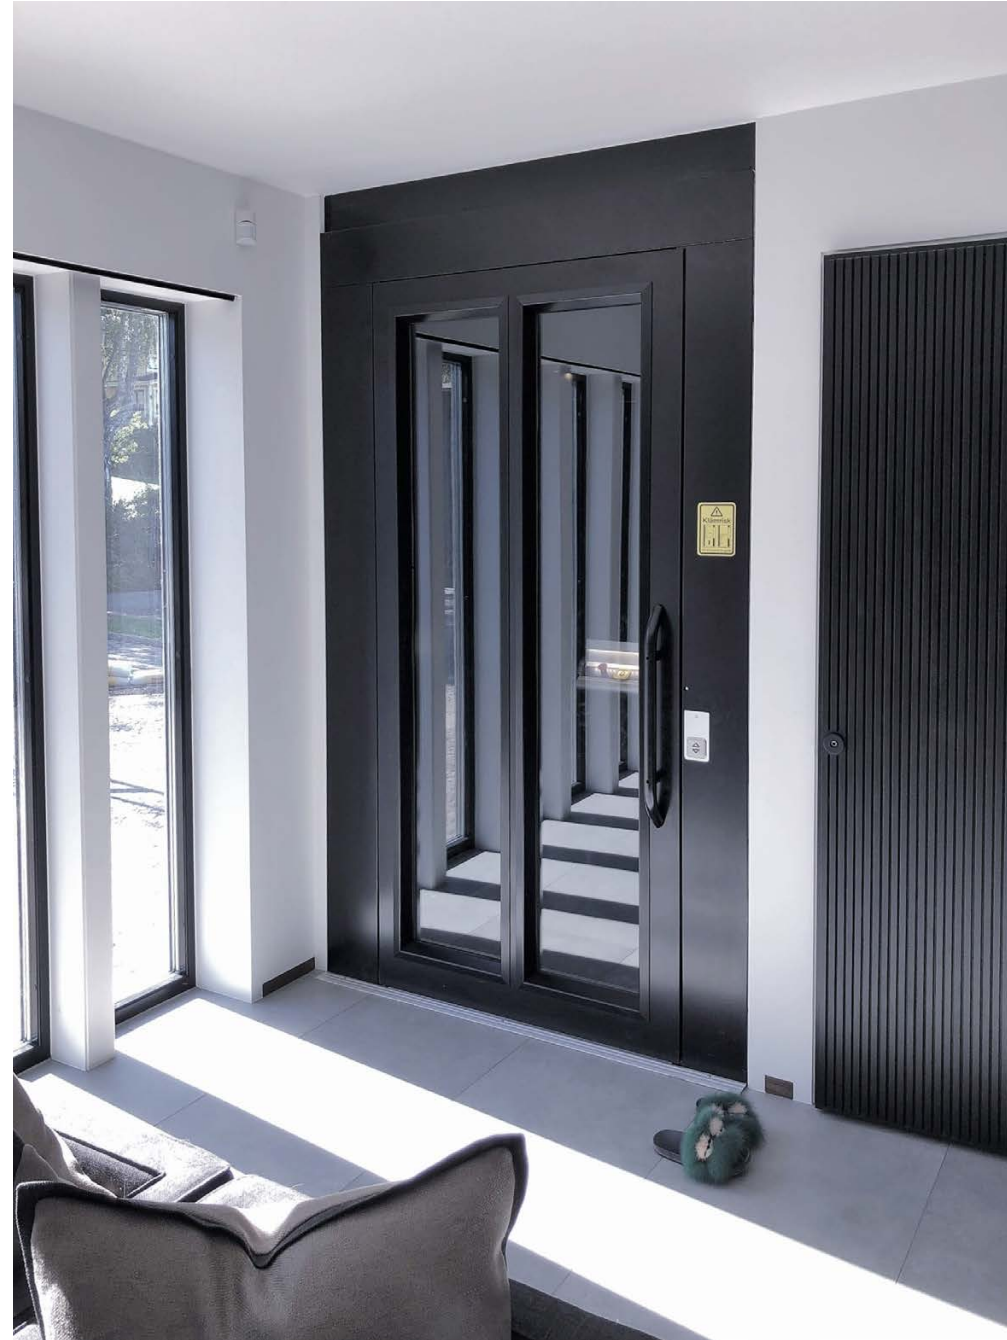


SERVICING & WARRANTY


Premier offer a 24 month warranty (including parts) with 2 service visits annually for 0.15 m/s speed lifts. For extended warranty options and more information please contact our sales team.



PREMIER BOOK A NO OBLIGATION CONSULTATION

Start a conversation with Premier today, we will assess your requirements, talk through our available options and ensure we meet your lift solution needs.

 061 922 903

 info@lifts.ie

 www.lifts.ie


ACCESSORIES & FINISHES



LIFT SHAFT, DOOR & PLATFORM FINISHES
STANDARD COLOUR RANGE




Signal White
RAL 9003
*standard



Traffic White
RAL 9016



Pure white
RAL 9010



Grey White
RAL 9002



White aluminium
RAL 9006



Telegrey 1
RAL 7045



Moss Green
RAL 6005



Anthracite Grey
RAL 7016



Brown red
RAL 3011



Jet Black
RAL 9005



Custom RAL
Available

FLOORING



BLACK RUBBER
NORAMENT
0702 - 825




GREY RUBBER
NORAMENT
074 - 825



CHECKER PLATE IN
ALUMINIUM



BLACK CARPET



GREY CARPET




STAINLESS STEEL ALSO AVAILABLE

Special order required



LIFT SHAFT OPTIONS

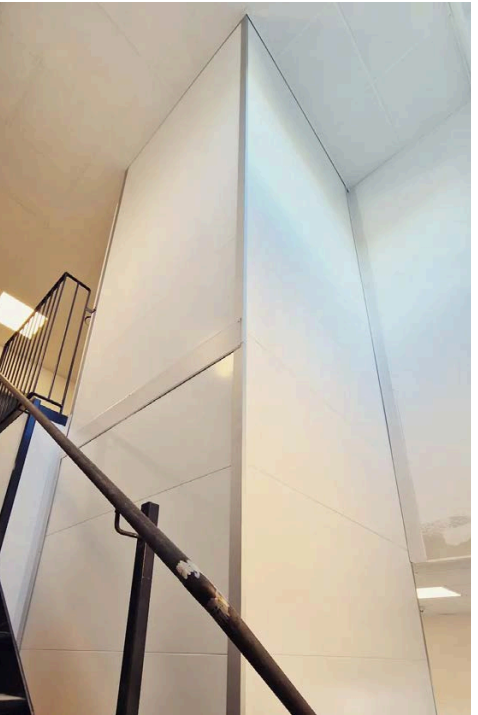

SOLID PANELS



CLEAR GLASS



PLATFORM OPTIONS



HALF HEIGHT PLATFORM
Standard option. Half height panel houses the controls and handrail, with safety stop edge. Total Height: 1100mm



FULL HEIGHT PLATFORM
Included with 1000kg option
Full height panel houses controls, and handrail both including LED lighting and spotlights. Also Available With Mirror
Total Platform Height: 2000mm

LANDING DOORS

DOOR OPTIONS

Our standard swing door has a rating (smoke and fire) of up to 60 minutes.



FIRE RATED



SMOKE RATED



SOLID PANEL




VISION PANEL




LARGE VISION PANEL



HALF HEIGHT (TOP FLOOR)
VISION PANEL

OPTIONAL EXTRASW



VOICE ANNOUNCER



KEY SWITCH

A key can be used to call and use the lift instead of a button to restrict access. The doors lock 10 seconds after closing. Ideal for school environments.



AUTOMATIC DOOR OPENERS



REMOTE CALL STATION

Surface mounted away from the lift. Allows the user to call the lift whilst away from the doors.



RAMPED ENTRY

Choose from a 50mm pit, or 50mm galvanised steel ramp at the lowest floor level where a pit is not possible.



AUTODIALLER

Integrated in the control panel and connected to the customers analog line the autodialler rings a set of pre-entered numbers when the button is pressed. When unanswered, the next number is called.



LEVEL INDICATOR



FOLDING SEAT

PREMIER

BOOK A NO OBLIGATION CONSULTATION

Start a conversation with Premier today, we will asses your requirements, talk through our available options and ensure we meet your lift solution needs.



061 922 903



info@lifts.ie



www.lifts.ie