


AutoSort 4 Flat Face Arm Sorter High Speed

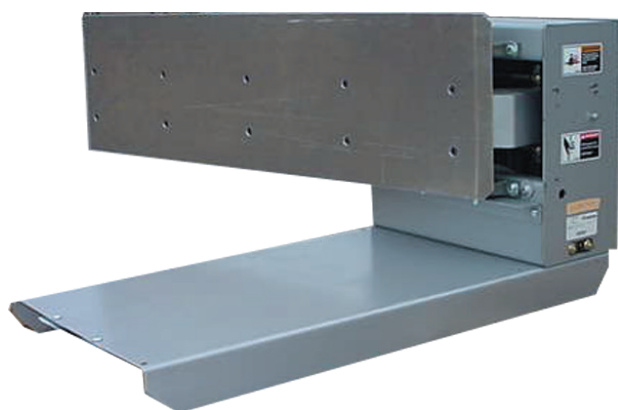

Wynright's High Speed Flat Face Arm Sorter can be used as an integral sortation component in almost any conveyor system. Our high speed induction conveyor strategically gaps and places the product onto the sortation belt conveyor. The High Speed Flat Face Arm Diverter is precision timed to swing out and make contact with the product to be sorted at a controlled rate of acceleration to provide a gentle sweeping divert action to a powered or non-powered takeaway conveyor.

The High Speed Flat Face Arm Sorter provides flexibility and effectiveness in handling and separating a wide range of packaged goods and materials. The arm is air operated and can be controlled manually or remotely to meet your specific sortation requirements.

The High Speed Flat Face Arm Sort Stations are designed to be used with Wynright's standard belt conveyor fitted with slip top belting.



Mechanical Characteristics

Nominal Conveyor Widths
24", 30" and 36"

Sort Speed

Up to 450 feet per minute on Sortation Belt Conveyor. Sort rate is dependent upon carton size and weight and system design.

Carton Weight Capacity

Up to 75 pounds, depending on sort rate and system design.

Air Requirements


Nominal operating pressure is 80 psi.

Compatible Conveyor

Automation high speed slick top belt sortation conveyor.

Technical Detail

Plan View

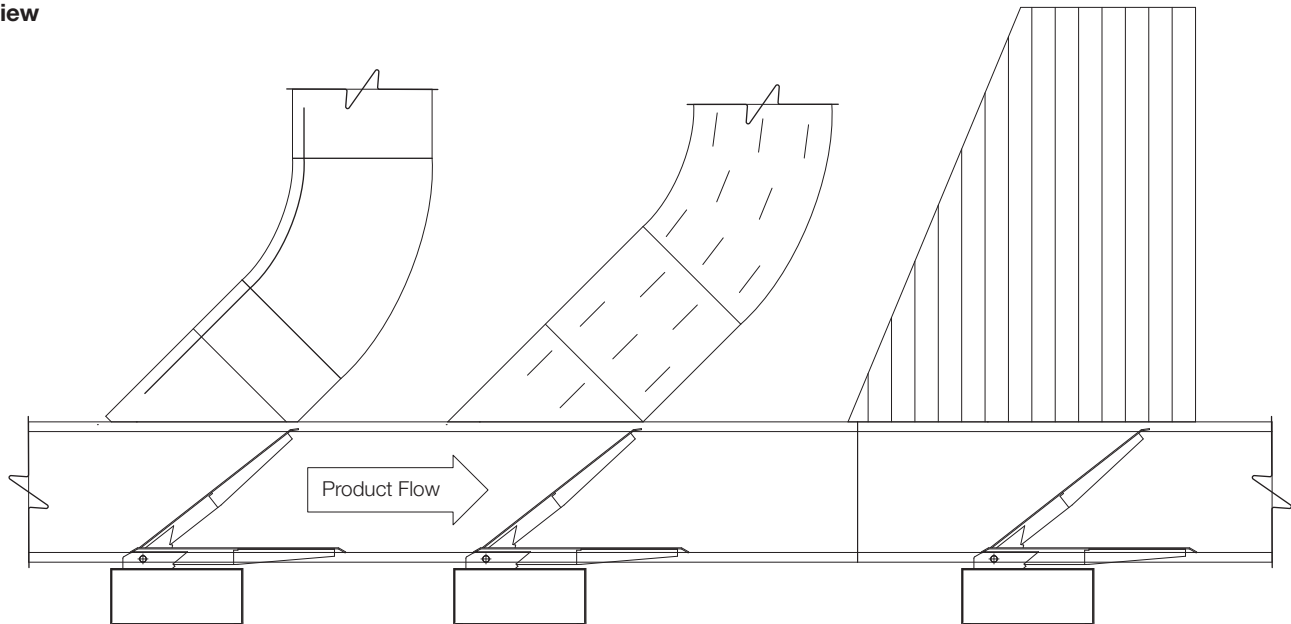

Specifications

Control Method

Can be controlled manually or remotely to meet your specific sortation requirements.

Typical Applications

- Shipping Sortation
- Receiving Sortation

Sortation Belt Conveyor

Live Load Capacity

Up to 100 lbs/ft. depending on width, roller centers, supports, etc.