




Hybrid Anchor v2


Powerful UWB & BLE anchor, gathering data from tags

Key features

- Compatible with TDoA & TWR
- Bluetooth 5 standard
- UWB IEEE 802.15.4 standard
- Long RTLS range
- High accuracy
- WiFi / Ethernet connectivity
- 4G Dongle support
- 3 internal omnidir. antennas
- Fine tuned antennas for channel 6.5 GHz and 2.4GHz bands
- Temperature adjusted high precision clock (TCXO)
- Firmware upgradeable
- Remote management
- Powered by DC or PoE
- Active & Passive PoE support
- Two built-in USB 2.0 ports
- Durable, dust-resistant enclosure
- IP40 ready for industrial areas
- Designed & manufactured in EU
- 200g weight
- Operating temperature 0 ÷ 65°C
- 1 year warranty
- CE certified
- Available in gray
- Optional:
 - Barometer
 - Accelerometer
 - Extended input voltage range
 - Extended temperature range
 - IP67

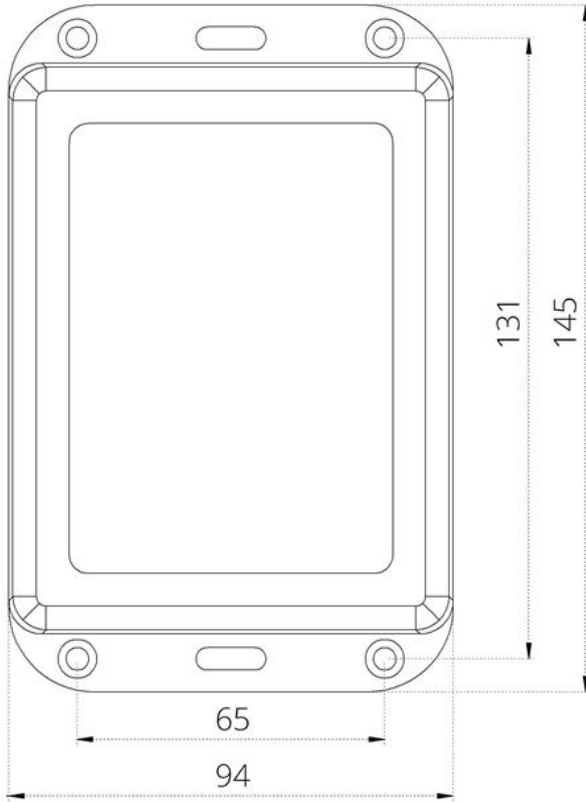


Front view
(cm)

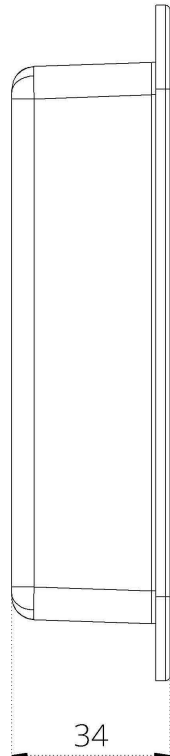


Side view
(cm)



IP67 variant

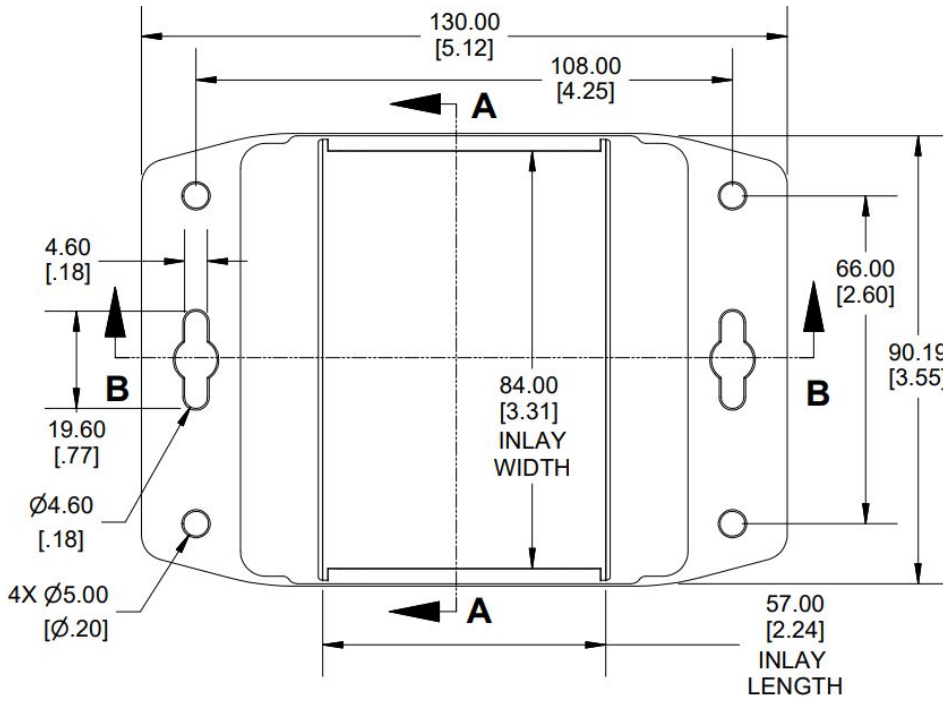

Front view
cm
[inch]

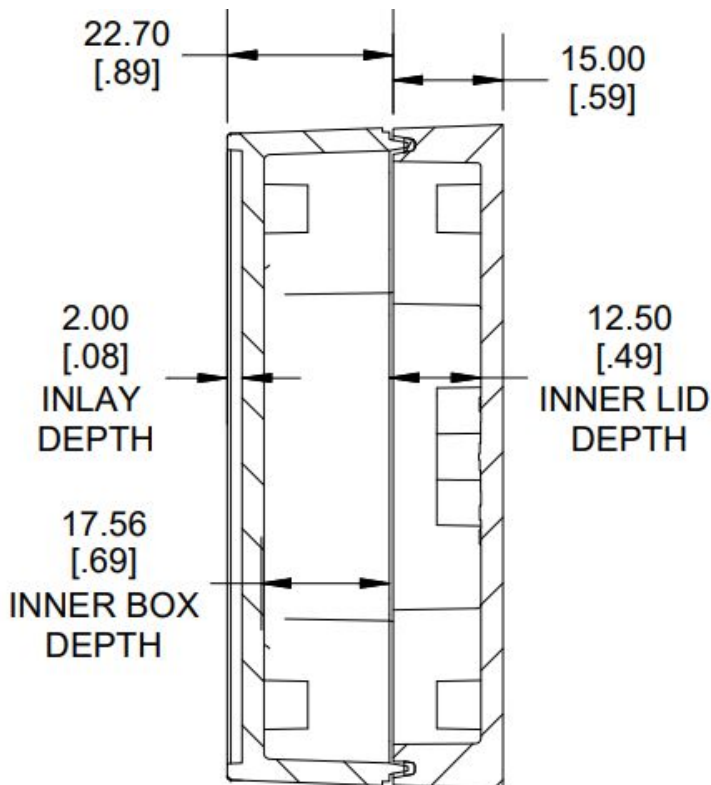

Side view
cm
[inch]



Front view



Side view