



12 August 2022

ASX ANNOUNCEMENT

SCOUT DRILLING CONFIRMS HYDROTHERMAL SYSTEM AT NIVRAM PROJECT, QUEENSLAND

- A single line of shallow Phase 1 Reverse Circulation (“RC”) drilling at Nivram has confirmed alteration and anomalous pathfinder geochemistry under the sedimentary cover;
- Geological setting supports for potential for a low sulphidation epithermal gold deposit at depth, similar to Pajingo;
- Phase 2 drill planning is underway to test the depth potential of the system.

Ten Sixty Four Limited (“Ten Sixty Four” or the “Company”) (ASX:X64) advises of the completion of Phase 1 drilling at the Nivram prospect in Queensland. The program has achieved the objective of confirming the hydrothermal alteration halo of the low sulphidation deposit.

Nivram features a 2km long gold in soil anomaly identified within a 15km-wide eroded caldera. The area is prospective for a low sulphidation, epithermal gold deposit similar to the Pajingo system to the north.

Ten Sixty Four’s Chairman, Mr. Jeffery McGlinn commented:

“Our objective of confirming the existence of a hydrothermal system at Nivram has been met for this first phase drill program. We will now progress to the next phase targeting the presence of gold at depth within this very large anomaly.”

TEN SIXTY FOUR[®]

TEN SIXTY FOUR LIMITED
ABN: 60 099 377 849 | ASX: X64

📍 Suite A, Level 11 Preston St,
Como WA 6152, Australia

📄 PO Box 122
South Perth WA 6151, Australia

☎ +61 8 9474 1330

✉ investor@x64.gold

🌐 www.x64.gold

**THE GOLD
STANDARD**

A single fence of 10 RC drill holes for a total of 676m (to a maximum depth of 84m) targeted the shallow subsurface across strike of the best soil anomaly downflow from the 5m sinter terraces.

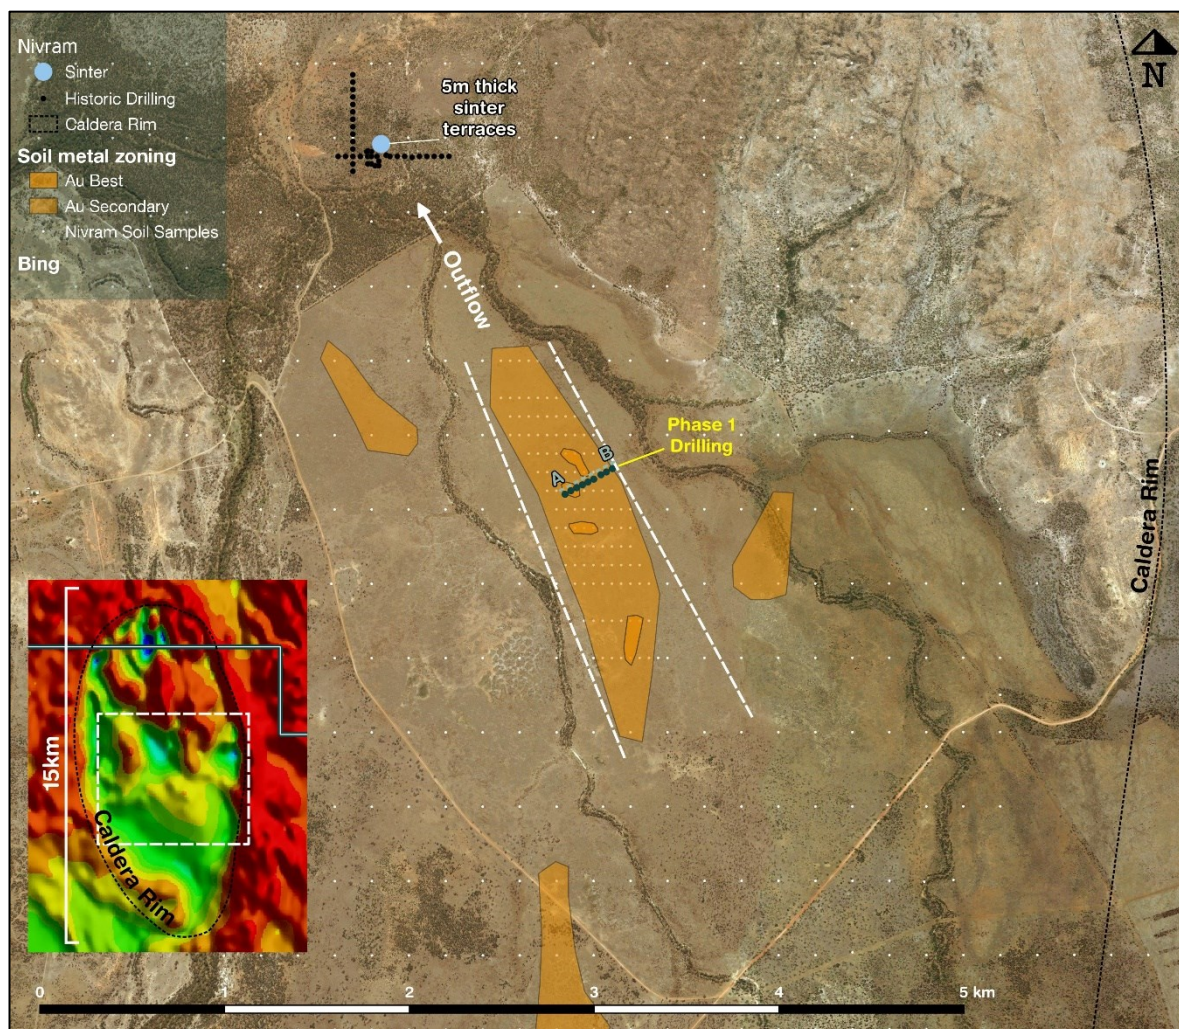


Figure 1: Nivram geochemical anomalies, location of mapped sinter, historic drilling and planned 1064 drilling fences.

The drilling showed a well-defined contact between Tertiary and the altered clay horizon, with anomalous pathfinder geochemistry (Te-As-Sb-Bi-Mo) typical of a hydrothermal halo. The hydrothermal alteration was present in all drill holes and was intensifying to the east. Assay results indicated limited gold anomalism (<0.23g/t) due to the shallow level of the system which was in line with expectations.

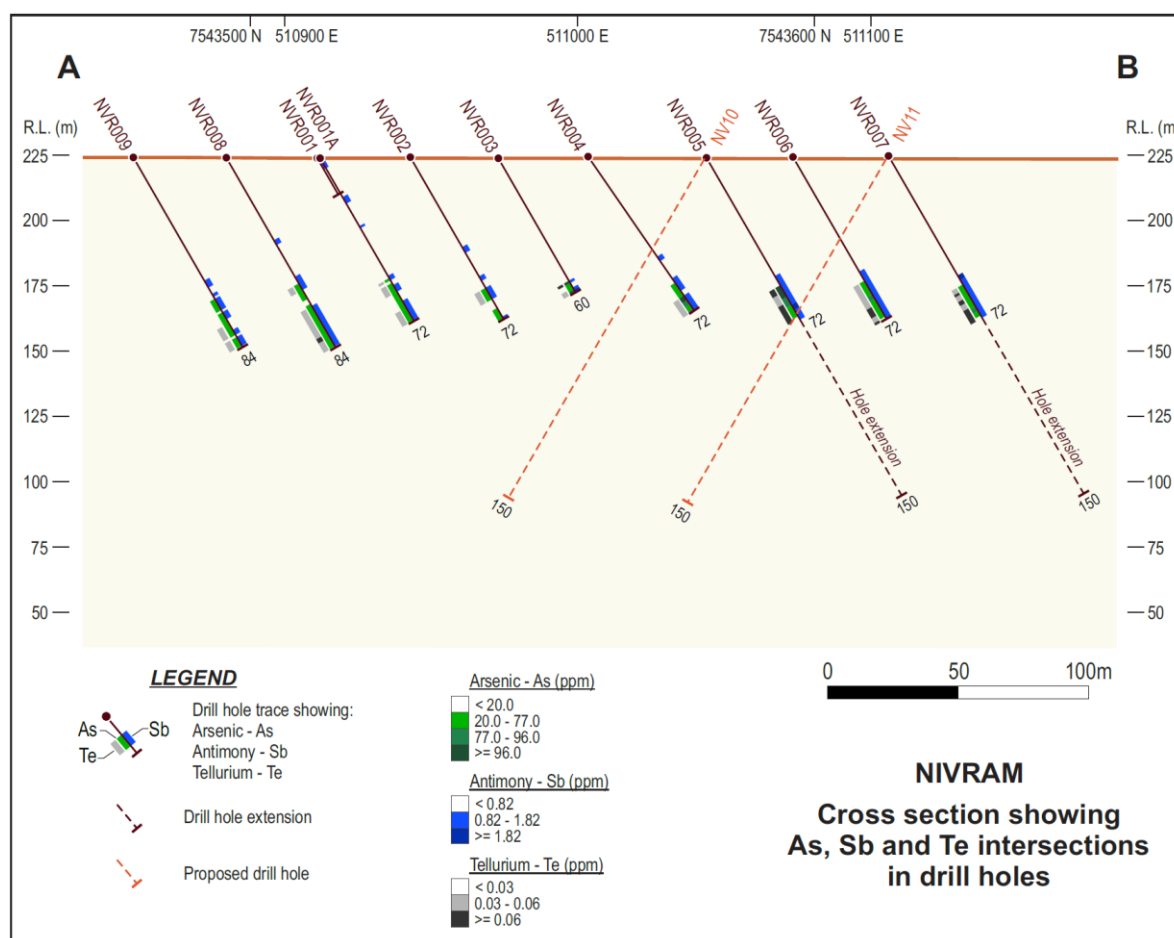


Figure 2: Nivram Phase 1 drilling cross section showing anomalous geochemistry.

A Phase 2 drill program is currently being planned which will extend drilling deeper toward the east to test the depth potential of the system at greater than 150m.

This announcement has been authorised for release by the Board of Ten Sixty Four.

For further information please contact:

INVESTORS:

Jennifer Nguyen
 Investor Relations
 +61 8 9474 1330
investor@x64.gold

MEDIA:

Michael Vaughan
 Fivemark Partners
 +61 422 602 720
michael.vaughan@fivemark.com.au



ABOUT TEN SIXTY FOUR

Ten Sixty Four is an unhedged, high-grade gold producer which operates the Co-O Gold Mine in the Philippines. The Company produced 89,789 ounces at an All-In-Sustaining-Cost of US\$1,362 per ounce in FY22. Ten Sixty Four has no long term debt and is targeting new growth opportunities in the Asia Pacific region.

COMPETENT PERSON STATEMENT

The information in this report that relates to Exploration Results, Mineral Resources and Exploration Target statements is based on information compiled or reviewed by Mr Carlos Duran, who is a Member of The Australian Institute of Geoscientists.

Mr Duran is former exploration Manager for the Ten Sixty Four Ltd. Mr Duran has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'.

Mr Duran consents to the inclusion in the Presentation of the matters based on his information in the form and context in which it applies.

The Exploration Targets described in this report are conceptual in nature and there is insufficient information to establish whether further exploration will result in the determination of Mineral Resources.



Table 1 – JORC Code, 2012 Edition

Section 1 : Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling. 	<ul style="list-style-type: none"> Soil samples collected from the “B” soil horizon at depths of up to 30cm. The samples were sieved to < #10 mesh and sample weights were usually around 300g. these samples were free of organic matter. RC drilling was used to obtain samples for geological logging and assaying.
	<ul style="list-style-type: none"> Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. 	<ul style="list-style-type: none"> 1m RC samples were collected via a cyclone mounted cone splitter; up to 4 metre intervals were composited using a riffle splitter. The riffle splitter was cleaned with compressed air after each interval. RC samples were submitted to the ALS for sample preparation and geochemical analysis. Preparation consisted of the drying of the sample, the entire sample being crushed to 70% passing 6mm and pulverised to 85% passing 75 microns in a ring and puck pulveriser. All RC samples were assayed for gold by 50g fire assay with AAS finish. Multielement analysis was completed using an ICPMS analysis
	<ul style="list-style-type: none"> Aspects of the determination of mineralisation that are Material to the Public Report. In cases where ‘industry standard’ work has been done this would be relatively simple (e.g. ‘reverse circulation drilling was used to obtain 1 m samples from which 3 	<ul style="list-style-type: none"> Reverse circulation drilling was used to obtain 1m samples in hydrothermal altered rocks. In Quaternary and Tertiary rocks composites of up to 4m were completed using a riffle splitter. All samples were pulverized to produce a 50g charge for fire assay.

Criteria	JORC Code explanation	Commentary
	<i>kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information</i>	
Drilling techniques	<ul style="list-style-type: none"> • <i>Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc.).</i> 	<ul style="list-style-type: none"> • RC drilling using a 4 3/4" face sampling RC hammer. • Survey Gear - Reflex EZ-TRAC digital multi-shot survey camera.
Drill sample recovery	<ul style="list-style-type: none"> • <i>Method of recording and assessing core and chip sample recoveries and results assessed.</i> 	<ul style="list-style-type: none"> • For RC sample recovery all samples were weighted and weights recorder in the logging sheet. Samples with no recovery or very low recoveries were recorded also in the logging sheet. • No relationship was noted between sample recovery and grade.
	<ul style="list-style-type: none"> • <i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i> 	<ul style="list-style-type: none"> • No extra measures were taken to maximise sample recovery as chip recoveries were deemed to be representative.
	<ul style="list-style-type: none"> • <i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i> 	<ul style="list-style-type: none"> • No relationship was noted between sample recovery and grade
Logging	<ul style="list-style-type: none"> • <i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i> 	<ul style="list-style-type: none"> • Geological logging was carried out on RC chips. Logging included, lithology, alteration and sulphide percentages.
	<ul style="list-style-type: none"> • <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography.</i> 	<ul style="list-style-type: none"> • Logging of RC chips is both quantitative and qualitative • All RC chips were photographed
	<ul style="list-style-type: none"> • <i>The total length and percentage of the relevant intersections logged.</i> 	<ul style="list-style-type: none"> • All drill holes are logged in full
Sub-sampling	<ul style="list-style-type: none"> • <i>If core, whether cut or sawn and whether quarter, half or all core taken.</i> 	<ul style="list-style-type: none"> • No diamond drill core was completed



Criteria	JORC Code explanation	Commentary
techniques and sample preparation	<ul style="list-style-type: none"> If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. 	<ul style="list-style-type: none"> 1m primary RC samples were obtained using a cyclone mounted 75%:12.5%:12.5% cone splitter. Compressed air was used to clean the cyclone after each drill rod. In un-altered rocks, 4m composites were created using the 1 m intervals using a riffle splitter. The splitter was cleaned using compressed air after each sample The majority of samples were dry; when unable to keep hole dry, wet samples were noted in the logging sheet.
	<ul style="list-style-type: none"> For all sample types, the nature, quality and appropriateness of the sample preparation technique. 	<ul style="list-style-type: none"> Industry standard sample preparation is conducted under controlled conditions within the laboratory (ALS Brisbane) and it is considered appropriate for the sample types.
	<ul style="list-style-type: none"> Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples 	<ul style="list-style-type: none"> For RC samples, two subsamples were taken of each 1m interval. Duplicated samples were collected as part of the QAQC protocol of 1 control sample every 20 samples. Duplicates were taken using the cyclone mounted splitter at the rig (75% - 12.5% - 12.5%).
	<ul style="list-style-type: none"> Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. 	<ul style="list-style-type: none"> QAQC protocol includes field duplicates. These were submitted at a frequency of at least 1 control samples in 20 samples. Regular reviews of the sampling were carried out by the Exploration Manager to ensure all procedures were followed and best industry practice carried out
	<ul style="list-style-type: none"> Whether sample sizes are appropriate to the grain size of the material being sampled. 	<ul style="list-style-type: none"> The sample sizes are considered to be appropriate for the nature of mineralisation within the prospects.
Quality of assay data and	<ul style="list-style-type: none"> The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. 	<ul style="list-style-type: none"> Sample preparation and analysis is being conducted through ALS laboratories in Brisbane, QLD

Criteria	JORC Code explanation	Commentary
Laboratory tests		<ul style="list-style-type: none"> RC samples were assayed using 50g fire assay for gold which is considered appropriate for this style of mineralisation. Fire assay is considered total assay for gold. Multi elements by four acid digestion followed by ICP MS
	<ul style="list-style-type: none"> For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. 	<ul style="list-style-type: none"> No geophysical tools, spectrometers or handheld XRF instruments have been used to determine assay results for any elements.
	<ul style="list-style-type: none"> Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established. 	<ul style="list-style-type: none"> Monitoring of results of blanks, duplicates and standards (inserted at a minimum rate of 1:20) is conducted regularly. QAQC data is reviewed for bias prior to uploading results in the database.
Verification of sampling and assaying	<ul style="list-style-type: none"> The verification of significant intersections by either independent or alternative company personnel. 	<ul style="list-style-type: none"> Significant intersections were monitored through review of drill chip by the Exploration Manager and technical staff. Data is also verified in Micromine software.
	<ul style="list-style-type: none"> The use of twinned holes. 	<ul style="list-style-type: none"> No drill holes have been twinned.
	<ul style="list-style-type: none"> Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. 	<ul style="list-style-type: none"> Primary data is collected via laptops in the field in a self-validating data entry form; data verification and storage are accomplished by a third-party database administrator.
	<ul style="list-style-type: none"> Discuss any adjustment to assay data. 	<ul style="list-style-type: none"> No adjustments have been applied to assay data.
Location of data points	<ul style="list-style-type: none"> Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. 	<ul style="list-style-type: none"> Drill hole collar locations were set out using a hand held GPS. Down hole surveys were completed using a Reflex EZ-Trac digital survey system at a maximum interval of 30m. Measurements are taken approximately at the mid point of a non-magnetic stainless-steel rod and



Criteria	JORC Code explanation	Commentary
		back from the RC hammer to avoid magnetic interference.
	<ul style="list-style-type: none"> • <i>Specification of the grid system used.</i> 	<ul style="list-style-type: none"> • All 1064 Gold exploration works are conducted using MGA94 Zone 55 grid.
	<ul style="list-style-type: none"> • <i>Quality and adequacy of topographic control.</i> 	<ul style="list-style-type: none"> • Topographic control is based on public domain data and it is considered adequate for the level of exploration conducted in Nivram
Data spacing and distribution	<ul style="list-style-type: none"> • <i>Data spacing for reporting of Exploration Results</i> 	<ul style="list-style-type: none"> • Fence drilling was completed with drill collars spacing between 30m to 41m apart.
	<ul style="list-style-type: none"> • <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> 	<ul style="list-style-type: none"> • Drill hole spacing is not adequate to report geological or grade continuity.
	<ul style="list-style-type: none"> • <i>Whether sample compositing has been applied.</i> 	<ul style="list-style-type: none"> • Some reported results are part of up to 4m composite samples.
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> • <i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> 	<ul style="list-style-type: none"> • The drill holes were orientated in order to intersect the interpreted strike of the mineralisation zone as perpendicular as possible based on information to date.
	<ul style="list-style-type: none"> • <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i> 	<ul style="list-style-type: none"> • There is no indication of sampling bias from drill hole orientation.
Sample security	<ul style="list-style-type: none"> • <i>The measures taken to ensure sample security.</i> 	<ul style="list-style-type: none"> • Samples were stored in sealed polyweave bags at the drill rig then put on a pallet and transport to ALS Brisbane by a freight carrying company
Audits or reviews	<ul style="list-style-type: none"> • <i>The results of any audits or reviews of sampling techniques and data.</i> 	<ul style="list-style-type: none"> • Sampling techniques were reviewed by 1064 Gold staff with no issues to be found to date.

Section 2: Reporting of Exploration Results

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. 	<ul style="list-style-type: none"> Nivram prospect is within EPM 27319; this EPM is owned by Ten Sixty Four Gold Ltd. The tenement is in good standing and without any impediments to operate. The drilling area is within the 500m buffer of Cat B vegetation
	<ul style="list-style-type: none"> The security of the tenure held at the time of reporting along with any known impediments to obtaining a license to operate in the area. 	<ul style="list-style-type: none"> The tenement is in good standing
Exploration done by other parties	<ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. 	<ul style="list-style-type: none"> Exploration for gold started in the late 1980s; explorers focused primarily on stream, rock chip, soil samples and mapping; in the late 1980s a few RAB and RC holes were completed approximately 2km to the NW of the area currently reported by 1064 Gold
Geology	<ul style="list-style-type: none"> Deposit type, geological setting and style of mineralisation. 	<ul style="list-style-type: none"> Nivram is a subvolcanic breccia pipe, epithermal low sulphidation deposit. The drill holes in this report have tested the upper portion of the clay alteration halo. The area is covered by quaternary and tertiary deposits with varying thickness between 15m – 50m
Drill hole Information	<ul style="list-style-type: none"> A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole 	<ul style="list-style-type: none"> See table 1 below

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> down hole length and interception depth hole length. 	
	<ul style="list-style-type: none"> If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	<ul style="list-style-type: none"> N/A
Data aggregation methods	<ul style="list-style-type: none"> In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated. 	<ul style="list-style-type: none"> No significant Au intercepts are reported; no cutoff values have been used. .
	<ul style="list-style-type: none"> Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. 	<ul style="list-style-type: none"> N/A
	<ul style="list-style-type: none"> The assumptions used for any reporting of metal equivalent values should be clearly stated. 	<ul style="list-style-type: none"> No metal equivalents are reported
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. . If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known'). 	<ul style="list-style-type: none"> The geometry of the mineralisation is not known enough to determine true width of intercepts.
Diagrams	<ul style="list-style-type: none"> Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan 	<ul style="list-style-type: none"> Figures attached within this report

Criteria	JORC Code explanation	Commentary
	<i>view of drill hole collar locations and appropriate sectional views.</i>	
Balanced reporting	<ul style="list-style-type: none"> Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results. 	<ul style="list-style-type: none"> All results are presented within this report.
Other substantive exploration data	<ul style="list-style-type: none"> Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. 	<ul style="list-style-type: none"> N/A
Further work	<ul style="list-style-type: none"> The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	<ul style="list-style-type: none"> Further drilling is planned and explained within this ASX announcement See body of this ASX announcement



Table 2: Drill hole information

Hole ID	East	North	RL	Azimuth	Dip	Depth
NVR001	510909	7543516	224	62	-60	16
NVR001_A	510910	7543517	224	62	-60	72
NVR002	510941	7543532	224.7	62	-60	72
NVR003	510971	7543547	224.7	62	-60	60
NVR004	511002	7543562	224.7	62	-55	72
NVR005	511041	7543586	224.7	62	-60	72
NVR006	511071	7543601	224.7	62	-60	72
NVR007	511103	7543619	225	62	-60	72
NVR008	510878	7543500	224.7	62	-60	84
NVR009	510846	7543481	224.7	62	-60	84

Table 3: Assays for selected pathfinder elements.

HOLE ID	FROM	TO	Au ppm	As ppm	Bi ppm	Cu ppm	Mo ppm	Pb ppm	Sb ppm	Te ppm	Zn ppm
NVR001	1	5	NSR	7.52	0.294	19.75	1.64	16.05	0.8	0.024	62.9
NVR001	5	8	NSR	4.22	0.16	9.86	1.29	11.95	0.56	0.016	27.5
NVR001	8	12	NSR	3.09	0.1	6.7	0.77	6.87	0.45	0.007	18.4
NVR001	12	16	NSR	5.44	0.145	10.9	2.19	9.23	0.45	0.009	33.7
NVR001_A	16	17	NSR	3.89	0.287	40.3	1.82	26.3	0.74	0.01	46.8
NVR001_A	17	20	NSR	4.1	0.332	38.6	1.92	13.75	0.86	0.015	43.2
NVR001_A	20	24	NSR	3.85	0.219	47.7	1.79	12.85	0.46	0.016	48
NVR001_A	24	25	NSR	5.03	0.277	34.8	1.92	12.85	0.67	0.016	47.4
NVR001_A	25	26	NSR	2.96	0.223	29.9	1.79	12.1	0.44	0.012	38.6
NVR001_A	26	27	NSR	3.14	0.218	31.6	1.84	13.05	0.46	0.011	44.5
NVR001_A	27	30	NSR	4.51	0.215	25.2	1.83	13.7	0.46	0.014	42.5
NVR001_A	30	31	NSR	3.1	0.197	24.6	1.87	12.95	0.47	0.013	50.6
NVR001_A	31	32	NSR	5.05	0.212	24.1	1.88	14.5	0.49	0.016	39.7
NVR001_A	32	33	NSR	3.84	0.231	19.65	2.06	17.15	0.54	0.012	37.7
NVR001_A	33	34	NSR	2.36	0.201	17.95	1.72	15.8	0.53	0.01	45.2
NVR001_A	34	35	0.23	10.9	0.218	32.9	8.64	106	1.32	0.054	164.5
NVR001_A	35	36	NSR	2.23	0.229	15.65	1.36	18.45	0.69	0.009	36.1
NVR001_A	36	37	NSR	1.48	0.274	11.9	1.04	21.1	0.75	0.011	22.7
NVR001_A	37	39	NSR	2.1	0.252	14.65	1.14	18.6	0.75	0.011	32.3
NVR001_A	39	40	NSR	3.32	0.153	18.4	0.95	10.45	0.68	0.009	26.5
NVR001_A	40	44	NSR	2.72	0.157	14.1	1.06	11.35	0.6	0.011	26.8
NVR001_A	44	47	NSR	5.07	0.201	33.8	2.16	14.45	0.48	0.012	41.4
NVR001_A	47	51	NSR	3.66	0.4	20	2.93	19.75	0.69	0.016	32.9
NVR001_A	51	52	NSR	2.69	0.669	9.62	2.97	21.1	0.67	0.015	23.7
NVR001_A	52	53	NSR	4.94	0.793	9.45	3.6	21	0.88	0.02	22.8
NVR001_A	53	54	NSR	24.3	0.717	21.6	9.82	26	1.16	0.051	28.5
NVR001_A	54	55	NSR	6.23	0.45	14.9	2.78	18.55	0.65	0.011	13.1
NVR001_A	55	56	NSR	33.5	0.481	26.9	19.5	12.65	0.65	0.031	28.7
NVR001_A	56	58	NSR	49.8	0.524	26.9	17.35	18.1	1.25	0.034	32.6
NVR001_A	58	59	NSR	43	0.463	18.5	7.46	7.34	1.11	0.026	24
NVR001_A	59	63	NSR	23.6	0.417	15.5	2.47	6.32	0.69	0.018	17.2
NVR001_A	63	66	NSR	36.1	0.455	31.8	6.4	7.07	0.86	0.021	19.6
NVR001_A	66	70	NSR	62.1	0.493	67.9	6.55	13.5	1.18	0.032	50.6
NVR001_A	70	72	NSR	75.8	0.613	35.2	4.21	12.15	1.07	0.056	50.4
NVR002	20	21	NSR	7.35	0.26	39.6	2.35	11.5	0.61	0.016	66.4
NVR002	21	25	NSR	5.05	0.246	33.8	2.14	12	0.53	0.015	44.1
NVR002	25	28	NSR	4.75	0.26	33.7	1.9	13.9	0.55	0.018	44.1
NVR002	28	29	NSR	2.47	0.203	19.55	1.64	16.2	0.42	0.013	39.2
NVR002	29	30	NSR	4.16	0.221	25.8	1.88	15.85	0.49	0.014	40.4
NVR002	30	31	NSR	3.42	0.2	25.6	1.96	13.1	0.44	0.013	41.5



HOLE ID	FROM	TO	Au ppm	As ppm	Bi ppm	Cu ppm	Mo ppm	Pb ppm	Sb ppm	Te ppm	Zn ppm
NVR002	31	32	NSR	3.32	0.214	20.5	1.86	15	0.48	0.017	38.1
NVR002	32	36	NSR	2.39	0.217	17.2	1.54	16.1	0.5	0.01	32.3
NVR002	36	38	NSR	4	0.228	15.5	1.15	13.85	0.72	0.013	24.9
NVR002	38	40	NSR	2.1	0.175	17.2	1.12	11.35	0.75	0.012	21.9
NVR002	40	42	NSR	3.62	0.158	18.45	1.11	11.1	0.87	0.012	21.5
NVR002	42	44	NSR	3.01	0.201	15.05	1.12	12.95	0.59	0.012	22.8
NVR002	44	45	NSR	6.47	0.209	36	1.79	12.65	0.5	0.015	40.9
NVR002	45	46	0.013	4.48	0.176	31.2	1.84	11.7	0.46	0.01	35.8
NVR002	46	48	NSR	2.89	0.236	24.4	2.05	16.15	0.53	0.013	36.6
NVR002	48	49	NSR	3.14	0.241	24.5	3.37	14.9	0.67	0.013	46.4
NVR002	49	51	NSR	11.85	0.388	24.3	3.36	18.3	0.79	0.02	30
NVR002	51	52	NSR	2.84	0.66	10.4	2.81	23.3	0.75	0.016	23.8
NVR002	52	53	NSR	2.27	0.684	9.42	2.91	19.7	0.68	0.016	21.5
NVR002	53	55	NSR	2.12	0.758	12.75	3.14	21.5	0.86	0.016	21.6
NVR002	55	57	NSR	1.85	0.763	15.1	2.93	18.2	0.74	0.021	19.4
NVR002	57	58	NSR	2.31	0.702	15.7	3.07	19.45	0.67	0.022	18
NVR002	58	62	NSR	44.5	0.518	15.65	6.16	7.5	1.16	0.025	18.6
NVR002	62	63	NSR	53.5	0.529	17.8	17.75	21.6	0.89	0.059	29.4
NVR002	63	67	NSR	17.1	0.455	23.1	2.48	11.15	0.68	0.011	14.4
NVR002	67	71	NSR	28.4	0.394	29.4	2.02	6.47	0.71	0.02	20.4
NVR002	71	72	NSR	62.8	0.541	41.6	7.57	5.76	1.24	0.033	39
NVR003	18	22	NSR	3.95	0.218	48.1	1.98	11.05	0.49	0.015	39.8
NVR003	22	25	NSR	2.84	0.204	29.8	1.56	11.4	0.46	0.011	37.7
NVR003	25	26	NSR	3.35	0.216	30.1	1.76	13.45	0.52	0.014	34.3
NVR003	26	27	NSR	5.53	0.23	33.6	2.07	13.5	0.48	0.019	39.7
NVR003	27	29	NSR	2.86	0.199	22	1.87	13.9	0.49	0.01	37.8
NVR003	29	30	NSR	2.71	0.215	21.4	2.11	16.85	0.49	0.013	39.7
NVR003	30	31	NSR	6.84	0.23	26.9	2.18	14.2	0.43	0.023	40.1
NVR003	31	32	NSR	5.46	0.222	24.7	2	13.85	0.46	0.016	36.6
NVR003	32	36	NSR	4.89	0.226	25	1.73	15.85	0.51	0.015	32.3
NVR003	36	38	NSR	7.83	0.225	24.1	1.28	15.45	0.68	0.015	26.8
NVR003	38	40	NSR	4.21	0.193	20.3	1.01	11.95	0.78	0.015	25.9
NVR003	40	42	NSR	2.28	0.163	12.35	1.04	10.85	0.66	0.01	19.1
NVR003	42	44	NSR	1.52	0.2	13.15	1.48	16	0.51	0.01	30.2
NVR003	44	45	NSR	3.42	0.238	21.2	2.01	17.45	0.57	0.016	39.5
NVR003	45	46	NSR	4.05	0.262	26.8	2.38	20.1	0.63	0.016	43.5
NVR003	46	47	NSR	4.81	0.258	26	2.22	16.3	0.55	0.016	38.5
NVR003	47	48	NSR	3.31	0.3	20.9	2.26	17.85	0.64	0.016	35.5
NVR003	48	49	NSR	4.86	0.335	27.4	3.25	19.65	0.72	0.019	36.7
NVR003	49	50	NSR	5.46	0.381	27.1	2.86	20.9	0.72	0.018	32.8
NVR003	50	51	NSR	17.5	0.45	20.8	3.71	18.9	0.76	0.019	25.9
NVR003	51	52	NSR	2.35	0.717	7.73	3.05	19.95	0.68	0.016	22.7
NVR003	52	53	NSR	2.08	0.797	8.89	2.63	20.2	0.76	0.014	22.1
NVR003	53	54	NSR	2.49	0.818	10.1	2.81	19.9	0.8	0.015	21.2
NVR003	54	55	NSR	2.82	0.82	8.98	2.84	18.5	0.73	0.016	17.6
NVR003	55	56	NSR	105.5	0.664	36.3	20.2	19.5	0.95	0.07	57
NVR003	56	57	NSR	20.7	0.585	17.1	6.91	33.5	0.57	0.021	25.8
NVR003	57	58	NSR	24.9	0.488	13.35	12	26.6	0.52	0.021	28.5
NVR003	58	59	NSR	72.2	0.543	21.7	25.7	14.7	1	0.044	38.9
NVR003	59	60	NSR	85.2	0.61	18.05	25	10.65	1.96	0.049	31.7
NVR004	18	20	NSR	6.77	0.295	36.7	1.82	12.4	0.67	0.019	34.2
NVR004	20	22	NSR	5.02	0.153	22.5	1.84	10.25	0.39	0.015	36.7
NVR004	22	24	NSR	5.65	0.173	25.2	1.75	11.45	0.43	0.013	35.9
NVR004	24	25	NSR	3.92	0.214	26.3	1.58	11.35	0.5	0.013	35.1
NVR004	25	26	NSR	3.07	0.216	27.8	1.61	13.85	0.59	0.013	35.3
NVR004	26	27	NSR	3.27	0.211	30.5	1.65	13	0.49	0.013	37.1
NVR004	27	28	NSR	3.51	0.222	28.7	1.82	13.05	0.54	0.013	36.1
NVR004	28	29	NSR	4.16	0.184	25.7	1.65	11.85	0.46	0.013	33.7
NVR004	29	30	NSR	2.94	0.184	20.8	1.57	12.9	0.46	0.014	34.2
NVR004	30	32	NSR	4.34	0.182	23.4	1.93	12.35	0.51	0.018	39.2
NVR004	32	34	NSR	2.72	0.202	20.7	1.86	14.9	0.63	0.012	36.7
NVR004	34	36	NSR	2.85	0.209	18.35	1.69	16.35	0.6	0.011	31.2



HOLE ID	FROM	TO	Au ppm	As ppm	Bi ppm	Cu ppm	Mo ppm	Pb ppm	Sb ppm	Te ppm	Zn ppm
NVR004	36	38	NSR	2.06	0.204	15.9	1.27	14.75	0.78	0.009	26.9
NVR004	38	40	NSR	2.68	0.244	16.95	1.34	19.2	0.77	0.012	29
NVR004	40	42	NSR	3.57	0.197	25.5	1.56	16.8	0.54	0.014	30.1
NVR004	42	44	NSR	2.76	0.219	21	1.64	16.75	0.75	0.013	36.1
NVR004	44	45	NSR	2.33	0.228	19.05	1.83	18	0.52	0.014	36.6
NVR004	45	47	NSR	4.38	0.241	25.4	2.07	15.95	0.56	0.013	39.2
NVR004	47	49	NSR	2.53	0.235	21.3	1.98	18.1	0.83	0.014	38.8
NVR004	49	51	NSR	2.91	0.243	22.3	2.11	18.1	0.71	0.014	37.3
NVR004	51	53	NSR	3.8	0.284	24.6	2.33	18.75	0.71	0.013	36
NVR004	53	55	NSR	6.49	0.452	19.6	2.93	21.8	0.8	0.015	28.6
NVR004	55	57	NSR	2.28	0.81	8.47	3.7	21.4	0.77	0.013	21.2
NVR004	57	59	NSR	2.93	0.838	10.2	3.77	25.5	0.95	0.018	18.6
NVR004	59	60	NSR	24.9	0.704	16.2	7.67	28.9	1.07	0.03	16.8
NVR004	60	61	NSR	39.5	0.578	17.4	6.28	16.55	1.38	0.031	28.7
NVR004	61	63	NSR	36.3	0.546	15.95	4.02	12	1.14	0.024	23
NVR004	63	65	NSR	27.8	0.497	13.7	2.09	8.2	0.74	0.02	14.8
NVR004	65	67	NSR	96.5	0.589	24.7	4.46	8.22	1.55	0.048	17.2
NVR004	67	69	NSR	81.5	0.526	75.1	5.33	34.3	1.6	0.034	26
NVR004	69	71	NSR	76.3	0.636	39.2	4.55	10.65	1.35	0.044	23.7
NVR004	71	72	NSR	84.1	0.668	31.7	4.55	10.8	1.31	0.058	26.2
NVR005	18	20	NSR	6.51	0.298	41.2	1.9	12.75	0.74	0.015	36.9
NVR005	20	22	NSR	5.37	0.204	45.8	1.89	10.85	0.53	0.018	42.7
NVR005	22	24	NSR	4.76	0.176	42.2	1.76	11.5	0.5	0.014	43.2
NVR005	24	26	NSR	5.54	0.23	31.1	1.86	12.3	0.65	0.016	37.4
NVR005	26	28	NSR	6.38	0.217	26.7	1.86	11.95	0.55	0.015	35.2
NVR005	28	30	NSR	4.7	0.195	21.8	1.83	13.3	0.51	0.014	36.1
NVR005	30	32	NSR	5.52	0.222	24.1	1.87	14	0.63	0.014	36.8
NVR005	32	34	NSR	4.15	0.207	19.45	1.55	15.6	0.53	0.011	31.5
NVR005	34	36	NSR	4.85	0.217	20.7	1.44	15.55	0.65	0.011	29.7
NVR005	36	38	NSR	3.79	0.24	20.4	1.38	16.05	0.64	0.014	29
NVR005	38	40	NSR	4.65	0.299	22.9	1.37	19.8	0.79	0.015	32
NVR005	40	42	NSR	2.47	0.259	18.85	1.6	18.25	0.55	0.013	35.5
NVR005	42	44	NSR	4.45	0.241	21.8	1.92	16.5	0.56	0.016	37
NVR005	44	46	NSR	7.84	0.255	23.9	2.26	17.4	0.63	0.014	37.1
NVR005	46	47	NSR	2.36	0.242	20.4	1.99	17.8	0.55	0.014	35.5
NVR005	47	49	NSR	5.61	0.265	25	2.33	18.1	0.66	0.013	39.2
NVR005	49	50	NSR	4.53	0.298	26.6	2.26	20.5	0.75	0.015	36.5
NVR005	50	52	NSR	5.15	0.428	18.95	2.57	21.6	0.77	0.018	33.9
NVR005	52	53	NSR	13.4	0.496	19.3	4.68	20.5	0.7	0.016	31.2
NVR005	53	55	NSR	4.35	0.8	10.7	3.58	22.3	0.93	0.01	22.2
NVR005	55	57	NSR	4.48	0.783	9.46	3.65	19.75	1.04	0.016	17.6
NVR005	57	58	NSR	124	0.822	18.75	28.2	19.65	1.51	0.088	32
NVR005	58	60	NSR	154.5	0.771	19	35.3	19.15	1.48	0.089	35.3
NVR005	60	62	NSR	102	0.714	15.65	9.12	20.5	1.51	0.056	20
NVR005	62	64	NSR	91.6	0.645	28	4.38	23.8	1.5	0.057	16.4
NVR005	64	66	NSR	79.7	0.588	21.5	7.94	11.25	1.8	0.067	19.4
NVR005	66	68	NSR	56.9	0.489	21.1	4.59	8.73	2.02	0.073	19.2
NVR005	68	70	NSR	47.3	0.529	22.1	4.46	9.94	1.52	0.078	23.4
NVR005	70	72	NSR	53.3	0.74	35.1	5.67	15.6	1.47	0.089	43.5
NVR006	18	20	NSR	6.92	0.232	32.6	1.91	9.89	0.64	0.019	34.6
NVR006	20	22	NSR	4.14	0.194	52.6	1.88	12.95	0.59	0.014	41
NVR006	22	24	NSR	4.5	0.2	32.5	1.65	12.55	0.57	0.013	39.6
NVR006	24	26	NSR	6.59	0.216	31.2	1.95	12.25	0.5	0.014	39.7
NVR006	26	28	NSR	4.13	0.18	20.5	1.81	12.95	0.51	0.011	37.4
NVR006	28	30	NSR	3.98	0.205	23.4	1.98	14.5	0.55	0.014	40.1
NVR006	30	32	NSR	4.66	0.205	23.4	1.93	14.1	0.55	0.011	38.2
NVR006	32	34	NSR	3.7	0.206	20.5	1.59	17.5	0.56	0.012	31.7
NVR006	34	36	NSR	3.97	0.204	19.95	1.37	15.35	0.57	0.009	29.4
NVR006	36	38	NSR	5.37	0.266	24.9	1.39	17.05	0.74	0.017	30.1
NVR006	38	40	NSR	5.64	0.256	29.9	1.53	17.8	0.68	0.017	41.5
NVR006	40	42	NSR	5.06	0.2	28.6	1.67	15.45	0.47	0.012	40.6
NVR006	42	44	NSR	7.5	0.171	28.7	1.63	12.95	0.45	0.012	42.9



HOLE ID	FROM	TO	Au ppm	As ppm	Bi ppm	Cu ppm	Mo ppm	Pb ppm	Sb ppm	Te ppm	Zn ppm
NVR006	44	46	NSR	3.62	0.201	21.8	1.71	16	0.61	0.01	39.5
NVR006	46	48	NSR	3.89	0.256	27	2.16	18.85	0.65	0.014	41.4
NVR006	48	49	NSR	4.91	0.298	26.2	2.01	20.4	0.77	0.017	32.2
NVR006	49	51	NSR	12.1	0.412	26.1	3.04	21	0.76	0.018	29.6
NVR006	51	53	NSR	3.73	0.809	10.55	3.09	23.8	0.9	0.01	23.3
NVR006	53	55	NSR	2.5	0.931	10.15	2.94	20.2	1	0.007	20.3
NVR006	55	57	NSR	39.5	1.05	13.45	11.4	18.35	1.14	0.046	19.3
NVR006	57	59	NSR	64.4	0.772	14.4	8.42	15.95	1.08	0.045	19
NVR006	59	61	NSR	57.8	0.583	19.95	2.57	15.45	1.03	0.033	13.9
NVR006	61	63	NSR	83	0.609	29.8	2.53	19.4	1.28	0.046	13.3
NVR006	63	65	NSR	48	0.586	47.3	2.33	17.4	1.45	0.038	15.9
NVR006	65	67	0.005	63.5	0.472	18.25	2.54	7.86	1.75	0.089	11
NVR006	67	69	NSR	51	0.623	35.8	4.42	6.98	1.4	0.082	33
NVR006	69	71	NSR	42.6	0.872	33	5.44	7.19	1.18	0.058	37.7
NVR006	71	72	NSR	15.3	0.829	28.6	1.28	13.05	0.93	0.069	36.2
NVR007	18	19	NSR	7.93	0.235	29.6	1.87	12.9	0.61	0.014	36
NVR007	19	21	NSR	4.52	0.165	37.7	1.84	12.15	0.41	0.013	40.4
NVR007	21	23	NSR	5.18	0.19	31	1.56	11.6	0.45	0.012	36.5
NVR007	23	24	NSR	3.15	0.219	27.2	1.62	14.45	0.51	0.01	37.4
NVR007	24	25	NSR	6.26	0.184	25.6	1.79	12.05	0.43	0.013	35.4
NVR007	25	27	NSR	6.39	0.188	28.5	1.81	11.95	0.47	0.016	35.7
NVR007	27	28	NSR	3.06	0.208	17.1	1.56	14.3	0.52	0.009	34.2
NVR007	28	29	NSR	4.41	0.188	21.5	1.81	13.9	0.47	0.012	35.9
NVR007	29	30	NSR	2.1	0.176	21.6	1.73	13.9	0.43	0.011	34.3
NVR007	30	32	NSR	3.99	0.196	23.2	1.61	13.05	0.43	0.012	34.6
NVR007	32	33	NSR	5.19	0.204	30.6	1.7	14.25	0.44	0.014	37.6
NVR007	33	34	NSR	3.28	0.212	21.8	1.56	15.4	0.44	0.01	34.3
NVR007	34	36	NSR	3.24	0.234	21.3	1.34	15.8	0.56	0.008	31.3
NVR007	36	37	NSR	5.28	0.255	23.1	1.22	15.6	0.57	0.014	45.1
NVR007	37	39	NSR	4.26	0.259	22.7	1.22	17.45	0.65	0.015	32.8
NVR007	39	41	NSR	2.92	0.26	19.3	1.24	17.25	0.56	0.014	31.5
NVR007	41	42	NSR	2.92	0.218	23.4	1.52	19.5	0.46	0.013	34.5
NVR007	42	44	NSR	6.01	0.19	27.2	1.34	12.7	0.39	0.011	41.6
NVR007	44	45	NSR	6.02	0.173	24.8	1.4	13.35	0.42	0.011	36.6
NVR007	45	47	NSR	4.05	0.244	30.2	1.8	17.35	0.5	0.012	43.4
NVR007	47	49	NSR	3.28	0.24	25.6	1.95	17.3	0.56	0.013	43.3
NVR007	49	51	NSR	3.07	0.303	16.65	1.55	20.7	0.73	0.015	24.6
NVR007	51	53	NSR	7.82	0.622	19.6	3.39	20.1	0.67	0.016	26.4
NVR007	53	55	NSR	5.41	2.03	23.5	6.12	39.4	2.27	0.02	38
NVR007	55	57	NSR	2.78	1.12	11.15	2.99	17.1	1.13	0.013	18.1
NVR007	57	59	NSR	32	1.11	11	4.62	17.45	1.21	0.025	18.8
NVR007	59	60	0.005	150.5	0.752	19.05	7.28	17.15	1.77	0.071	20.4
NVR007	60	62	NSR	59	0.528	24.6	1.82	18.5	1.55	0.057	12
NVR007	62	64	NSR	52.3	0.541	53.1	2.77	11.55	1.43	0.081	14.4
NVR007	64	66	NSR	34.2	0.624	59.6	1.53	9.05	1.08	0.058	15.5
NVR007	66	68	NSR	35.2	0.793	34	1.63	9.15	1.34	0.071	13.1
NVR007	68	70	NSR	66.4	1.33	34.8	5.25	7.26	1.72	0.089	23.9
NVR007	70	72	NSR	50.1	1.61	27.1	5.95	13.5	1.46	0.064	28.4
NVR008	18	20	NSR	6.62	0.346	41.8	1.58	21.3	0.78	0.016	33.5
NVR008	20	22	NSR	3.8	0.227	44.5	1.54	11.5	0.53	0.014	34.9
NVR008	22	24	NSR	4.48	0.263	29.4	1.58	11.9	0.6	0.013	36.3
NVR008	24	26	NSR	6.28	0.27	34.2	1.76	12.85	0.57	0.013	36.8
NVR008	26	28	NSR	4.09	0.198	23.9	1.69	13.05	0.48	0.014	34.2
NVR008	28	29	NSR	4.8	0.207	22.4	1.62	12.6	0.42	0.005	34.6
NVR008	29	31	NSR	3.05	0.206	24.3	1.82	14	0.51	0.014	36
NVR008	31	33	NSR	3.41	0.228	23.6	1.82	16.1	0.52	0.017	34.1
NVR008	33	35	NSR	3.74	0.221	22	1.42	15.4	0.6	0.012	29
NVR008	35	37	NSR	2.75	0.274	17.25	1.23	18.2	0.69	0.011	25.1
NVR008	37	39	NSR	4.73	0.244	22.2	1.13	16.3	0.85	0.013	24.9
NVR008	39	41	NSR	2.93	0.167	15.55	1.24	12.65	0.73	0.007	20.4
NVR008	41	42	NSR	5.17	0.199	19.25	1.51	12.45	0.66	0.013	24.4
NVR008	42	43	NSR	6.73	0.137	46.4	2.12	9.1	0.42	0.012	39.6



HOLE ID	FROM	TO	Au ppm	As ppm	Bi ppm	Cu ppm	Mo ppm	Pb ppm	Sb ppm	Te ppm	Zn ppm
NVR008	43	44	NSR	5.32	0.128	40.3	2.1	9.4	0.44	0.011	39.8
NVR008	44	46	NSR	4.36	0.115	34	1.93	9.96	0.36	0.01	34.2
NVR008	46	47	NSR	2.37	0.211	22.6	2.18	15.75	0.45	0.009	31.8
NVR008	47	48	NSR	3.42	0.261	29.1	2.38	16.9	0.49	0.012	33.1
NVR008	48	49	NSR	4.07	0.363	25.6	2.93	21.3	0.64	0.017	26.7
NVR008	49	50	NSR	19.55	0.349	29.7	3.89	17.5	0.77	0.024	24.8
NVR008	50	51	0.007	5.64	0.638	14.65	3.4	28.5	0.76	0.016	24.2
NVR008	51	53	NSR	2.66	0.589	16.25	2.76	20.9	0.66	0.012	15.8
NVR008	53	55	NSR	3.33	0.538	23	3.48	20	0.89	0.014	10.1
NVR008	55	56	NSR	3.79	0.574	25	2.15	18.1	0.86	0.017	8.7
NVR008	56	57	NSR	41.3	0.618	39.7	3.81	72	1.04	0.046	16.8
NVR008	57	59	NSR	43.7	0.544	26.1	5.02	28.2	1.08	0.026	17.8
NVR008	59	61	NSR	22	0.438	9.95	1.99	7.68	0.77	0.014	11.2
NVR008	61	63	NSR	20.5	0.412	28	1.96	9.64	0.7	0.012	15.8
NVR008	63	65	NSR	17.5	0.397	31.2	1.54	7.17	0.58	0.015	14.6
NVR008	65	66	NSR	22.8	0.37	53.9	1.67	9.96	0.74	0.009	19.9
NVR008	66	68	NSR	62.1	0.614	50.8	3.53	7.17	1.42	0.029	36.2
NVR008	68	69	NSR	70.3	0.509	60	4.26	7.12	1.55	0.033	48.5
NVR008	69	71	NSR	63.2	0.497	69.6	4.19	16.25	1.3	0.026	49.9
NVR008	71	73	NSR	69.4	0.586	41.8	3.52	16.7	1.3	0.043	52.2
NVR008	73	74	NSR	70.2	0.505	35	3.95	8.9	1.07	0.044	54.7
NVR008	74	76	NSR	53.5	0.447	38.2	2.68	15.5	1.13	0.048	59.6
NVR008	76	78	NSR	47.2	0.456	40.4	3.41	9.08	1.11	0.055	67.9
NVR008	78	80	NSR	56.4	0.472	42.5	5.63	12.9	1.48	0.068	84
NVR008	80	82	NSR	42.5	0.438	41.4	3.94	13.95	1.42	0.055	121.5
NVR008	82	84	NSR	36.5	0.401	44.9	2.74	10.65	1.28	0.052	158.5
NVR009	18	20	NSR	3.85	0.328	44.3	1.61	20.8	0.73	0.016	37.5
NVR009	20	22	NSR	4.36	0.224	51.7	1.7	13.05	0.46	0.015	40.3
NVR009	22	23	NSR	4.89	0.246	35.9	1.54	13.6	0.53	0.015	35.6
NVR009	23	25	NSR	5.24	0.262	34.7	1.6	14.3	0.61	0.016	35.1
NVR009	25	27	NSR	4.06	0.218	31.1	1.86	14.3	0.48	0.015	37.5
NVR009	27	29	NSR	3.78	0.21	23	1.71	13.45	0.52	0.014	36
NVR009	29	31	NSR	4.98	0.199	29.2	1.72	11.8	0.44	0.013	35.4
NVR009	31	33	NSR	4.22	0.222	22.7	1.73	15.7	0.53	0.014	32.9
NVR009	33	34	NSR	2.14	0.207	18.55	1.43	16.4	0.54	0.01	30.4
NVR009	34	36	NSR	8.58	0.243	28.4	1.31	14.05	0.63	0.016	26.6
NVR009	36	38	NSR	4.57	0.206	20.3	0.99	14.55	0.69	0.012	22.3
NVR009	38	40	NSR	5.31	0.164	24.8	0.88	12.15	0.65	0.01	20.8
NVR009	40	42	NSR	6.31	0.206	27.2	0.97	12.4	0.73	0.013	24.1
NVR009	42	44	NSR	9.34	0.13	49.2	1.58	8.8	0.41	0.014	38.2
NVR009	44	45	NSR	5.63	0.133	34.4	1.8	10.4	0.48	0.008	32.5
NVR009	46	47	NSR	4.6	0.225	33.3	2.28	15.55	0.56	0.012	35.7
NVR009	47	49	NSR	3.77	0.298	27.5	2.41	18.7	0.67	0.014	33.9
NVR009	49	50	NSR	5.38	0.327	19.7	1.62	17.7	0.76	0.018	27.3
NVR009	50	51	NSR	5.81	0.381	19	1.79	20.8	0.77	0.019	26.7
NVR009	51	53	NSR	5.38	0.429	23.4	2.22	27.4	0.75	0.017	34.5
NVR009	53	55	NSR	4.09	0.385	13.85	2.04	24.7	0.8	0.008	22.9
NVR009	55	56	NSR	8.24	0.268	22.5	2.72	15.65	0.88	0.008	36.7
NVR009	56	58	NSR	12.35	0.22	26	3.56	17.95	0.87	0.012	59.8
NVR009	58	60	NSR	6.66	0.177	16.25	2.13	19.35	0.69	0.006	39.4
NVR009	60	61	NSR	11.5	0.16	16.5	2.56	21.4	0.7	0.006	48.8
NVR009	61	62	NSR	16.9	0.155	16.7	2.61	24.3	0.63	0.002	51.9
NVR009	62	63	NSR	14.1	0.172	14.7	2.49	23.8	0.63	0.002	43.6
NVR009	63	64	NSR	22.6	0.183	19.8	3.03	30.9	0.89	0.002	61.3
NVR009	64	66	NSR	23.4	0.127	18.75	3.45	20.5	0.72	0.002	51.5
NVR009	66	68	NSR	20.2	0.263	19.3	3.46	17.15	0.7	0.005	57.5
NVR009	68	69	NSR	15.3	0.225	16.35	2.7	15.35	0.43	0.002	49.5
NVR009	69	70	NSR	22.1	0.206	18.4	3.75	20.1	0.51	0.005	59.9
NVR009	70	72	NSR	24.8	0.222	21.6	4.46	27.5	0.43	0.006	65.8
NVR009	72	74	NSR	20.8	0.794	14.3	3.36	6.33	0.47	0.014	30.3
NVR009	74	76	NSR	34.8	0.498	17.9	2.8	6.53	0.63	0.029	30.5
NVR009	76	77	NSR	60.9	0.626	34.8	4.64	25.8	0.75	0.036	43.5

TEN SIXTY FOUR®

TEN SIXTY FOUR LIMITED
ABN: 60 099 377 849 | ASX: X64



HOLE ID	FROM	TO	Au ppm	As ppm	Bi ppm	Cu ppm	Mo ppm	Pb ppm	Sb ppm	Te ppm	Zn ppm
NVR009	77	80	NSR	72.9	0.571	38	6	35.2	1.21	0.032	47.6
NVR009	80	82	NSR	69.3	0.465	42.1	2.98	24.6	1.36	0.034	107.5
NVR009	82	84	NSR	67.7	0.439	45	3.03	8.47	1.33	0.04	118

Legend: NSR = No Sample Results (Below Detection Limit)

End of Report