


FIFTHWHEELER / Z252 Z353 Z453

CHASSIS RECOMMENDATIONS

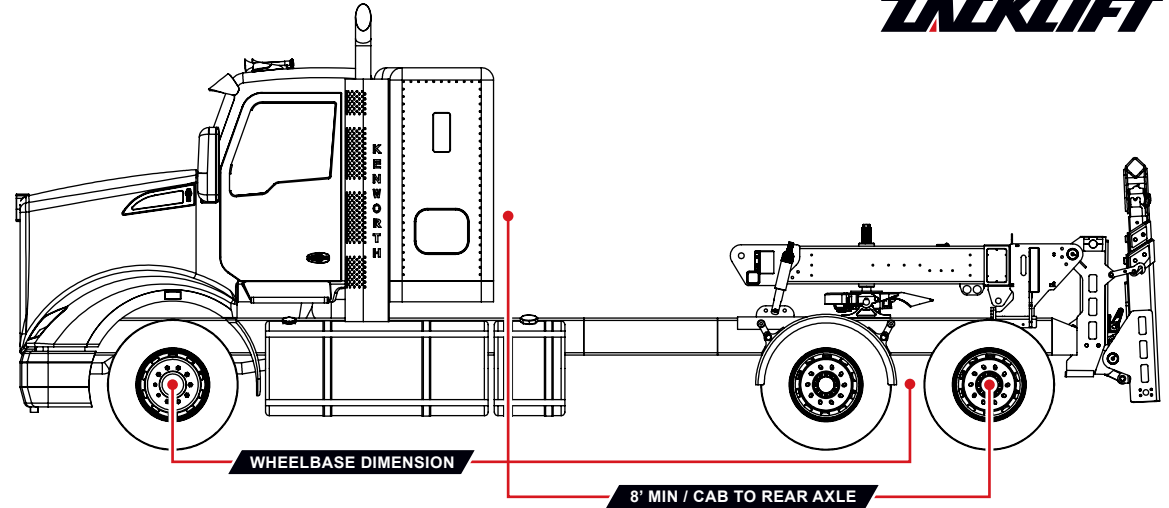

MINIMUM WHEELBASE RECOMMENDATIONS

NOTE: COUNTER WEIGHT MAYBE REQUIRED FOR SHORTER WHEELBASES

MODEL	IMPERIAL	METRIC
Z252	240" +	6096 MM +
Z353	280 - 300"	7112 - 7620 MM
Z453	300 - 320 MM +	8128 MM+

HYDRAULIC REQUIREMENTS FOR PTO / PUMP (Z1304-52NC)

CONFIGURATION	IMPERIAL FLOW RATE / PRESSURE		METRIC FLOW RATE / PRESSURE	
ZACKLIFT ONLY	6-10 GPM	2,500-3,000 PSI	23-38 LPM	172-207 BAR
ZACKLIFT / STIFFLEGS & WINCH	10-12 GPM	2,500-3,000 PSI	38-45 LPM	172-207 BAR

ZACKLIFT CRATED SHIPPING WEIGHTS

MODEL	FIFTHWHEELER		PERMANENT MOUNT	
Z252	4,220 LBS	1914 KG	1,875 LBS	850 KG
Z353	5,115 LBS	2320 KG	2,770 LBS	1256 KG
Z453	5,805 LBS	2633 KG	3,460 LBS	1569 KG

GENERAL NOTES

- 12V SELF CONTAINED POWER PACK (Z1304 - 59NC) / CAN ONLY OPERATE ZACKLIFT UNIT, NO ACCESSORIES I.E. WINCH & IS NOT RECOMMENDED FOR Z353 OR Z453, SLOW MOVEMENT & OVERHEATING MAY OCCUR
- TRAILER GLAD HANDS FOR EMERGENCY AND SERVICE AIR
- TRAILER 7 WAY PLUG (TAIL LIGHTS AND 12V ACCESSORIES POWER)
- FIFTHWHEEL PLATE ON TRUCK MUST BE ADJUSTABLE
- TYPICAL CHASSIS FRAME WIDTH (OUTSIDE OF RAIL) IS 32" TO 35" OR (812 MM TO 889 MM)