


StackLight • L4

The technology leader in solid-state integrated stack lighting for libraries

with a variety of mounting possibilities

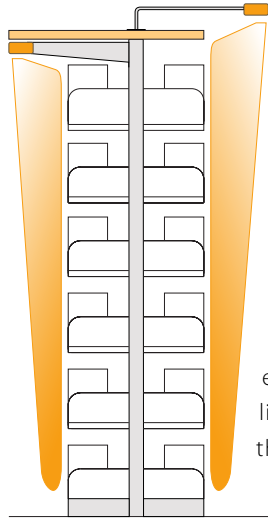


glare-free in front of the stacks

no UV or IR

flicker free light.

even wash of light down to the bottom

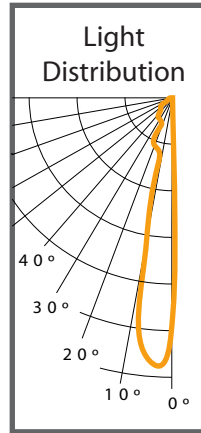

IES, LM-79, TM-21 files upon request

electrical specifications


hardwired only
voltage: 110-277V, 50/60 Hz
power: varies, ~5w/ft
integrated driver
interconnect 50 feet maximum




physical specifications

profile: Box: 1.75" h x 4.375" d
length: 12"-48" nominal
material: extruded aluminum
finish: powdercoat to match

system components

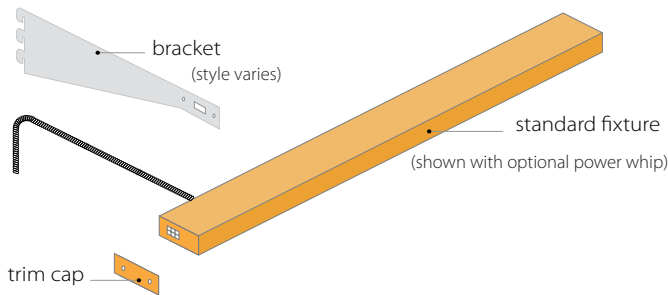

system configuration

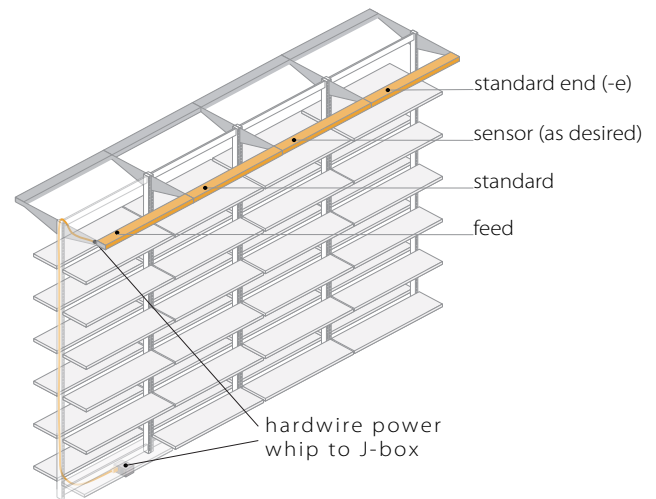

All L4 stacklight fixtures are universal and connect to adjacent fixtures, sending power/signal to all interconnected units in a straight run. Control signals can be wirelessly grouped to include those on adjacent ranges as a standalone installation or connected to a whole-house control system.

