

# Delta R11

Insulated Commercial  
Steel Doors

# Delta R11

Outstanding thermal performance and the highest R-Value available




Power Ready



STC 35\*

- Full Size Closer Reinforcing
- Fully Bonded High-Density Polyurethane
- Beveled Edges
- 7-Gauge Hinge Reinforcing
- 18-Gauge Galvanneal
- Water-Based Primer Finish

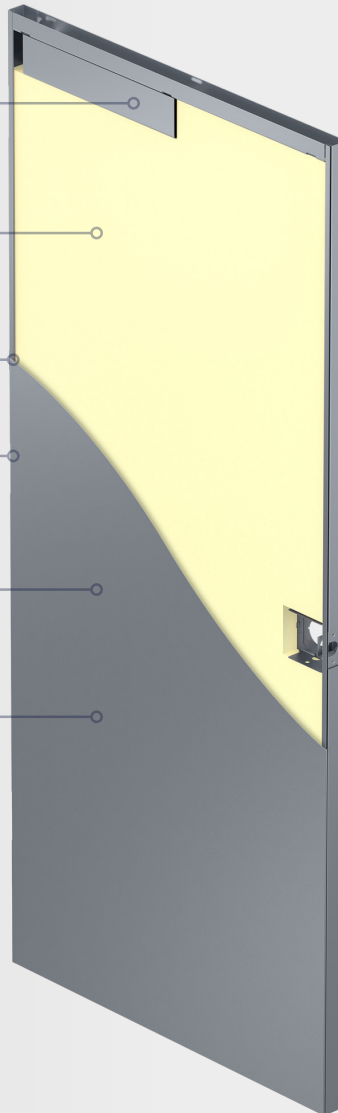

## Additional Options:

- Custom sizes and hardware configurations
- Flush top (steel top cap)
- Paintable galvanneal (unprimed) finish
- G90 galvanized steel
- Square edge/reversible
- Specialty finishes
- Window and louver cutouts



### Fire-Rated\*

- Up to 90min.
- Singles / Pairs



### Hurricane\*

- Up to +/- 90 psf
- Singles / Pairs



### Thermal Value

- R Value = 11.11
- U Value = 0.09

- △ Rust-inhibiting galvanneal steel
- △ Tested to 1,000,000 cycles (Level A)
- △ 10-year warranty

## Performance Tested

Independently certified to meet the highest standards in performance for fire, severe weather and endurance testing, all backed by an unmatched factory warranty.

## Sustainable Design

All door components are manufactured from environmentally responsible materials using the industry's most advanced manufacturing processes. LEED credits available for recycled content, indoor air quality, and regional sourcing.

## Hardware Compatibility

Compatible with all leading providers of security and access control systems, for both electrified and mechanical hardware.

## Applicable Standards:

- ANSI/BHMA A156.115
- ANSI A250.4
- ANSI A250.8
- ASTM A653
- ANSI A250.10
- UL 10B
- ASTM E2010
- ASTM E2074
- CAN4 S104
- ASTM E90
- ASTM E413

\*See specific listings for full details



**DAYBAR**

daybar.com  
(888) 332-9227

architects@daybar.com  
sales@daybar.com

**DAYBAR**  
**XPRESS**