# Delta

Commercial Steel Doors



## Delta

### **Premium non-insulated** steel doors






STC 36\*



- Up to 3hr. • Singles / Pairs
- **Hurricane\***
- Up to +/- 90psf
- Singles / Pairs



- R Value = 2.08 • U Value = 0.48
- △ Rust-inhibiting galvanneal steel
- Tested to 1,000,000 cycles (Level A)
- △ 10-year warranty

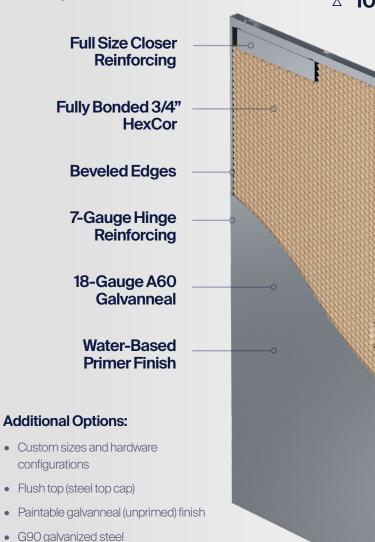

#### Performance Tested

Independently certified to meet the highest standards in performance for fire, severe weather and endurance testing, all backed by an unmatched factory warranty.

#### Sustainable Design

All door components are manufactured from environmentally responsible materials using the industry's most advanced manufacturing processes. LEED credits available for recycled content, indoor air quality, and regional sourcing.

#### **Hardware Compatibility**

Compatible with all leading providers of security and access control systems, for both electrified and mechanical hardware.

#### Applicable Standards:

- ANSI/BHMA A156.115
- ANSI A250.4
- ANSI A250.8
- ASTM A653
- ANSI A250.10
- UL10B

- UL10C
- ASTM E2010
- ASTM E2074
- CAN4S104
- ASTM E90
- ASTM E413

\*See specific listings for full details



• Square edge/reversible

Window and louver cutouts

Specialty finishes



















Complies with ANSI A250.8



