

SWITCH

ROOM DARKENING

Switch is made from high quality 100% Polyester with acrylic foam backing. With superior light blocking, heat and reflection properties it assists in maintaining an energy efficient environment.

Switch does not allow light into the room, giving total privacy. Woven to a fine fabric weave with just a glimpse of lustre gives Switch a stylish and contemporary look.

Key Benefits

- ✓ 100% Free of PVC to help reduce toxins in your environment
- ✓ Australian Made
- ✓ 100% polyester with acrylic foam coating
- ✓ Custom colours available

Top Specifications

Applications	Roller Blinds, Roman Blinds, Room Darkening
Width	Maximum Roller Width – 3000mm Maximum Roman Width – 2930mm
Weight	435 gr/m2 ± 10%
Thickness	0.56mm ± 10%
Fire Classification	AWTA AS1530.2 1993 AWTA AS1530.3 1993
Lightfastness	AWTA test AS 2001.4.21–2006: 6–7
Fabric Warranty	7 years (internal use only)



Colour Range




Platinum




Ghost




Ghost (Grey Back)




Concrete



Champagne




Champagne
(Grey Back)




Alpaca



Knight




Knight (Grey Back)



Bluestone



Licorice



Licorice
(Grey Back)

Contents:

Colour Range	2
Fabric Specifications	3
Light and Solar Optical Properties	3

SWITCH ROOM DARKENING

Colour Range



Platinum



Ghost



Ghost (Grey Back)



Concrete



Champagne



Champagne (Grey Back)




Alpaca



Knight




Knight (Grey Back)

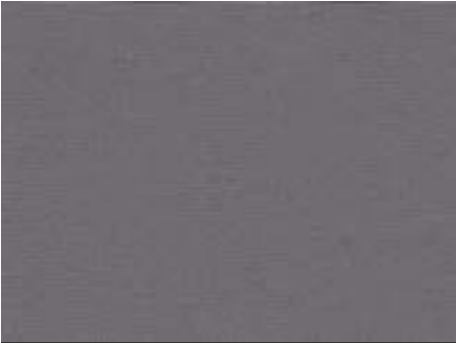

Bluestone



Licorice

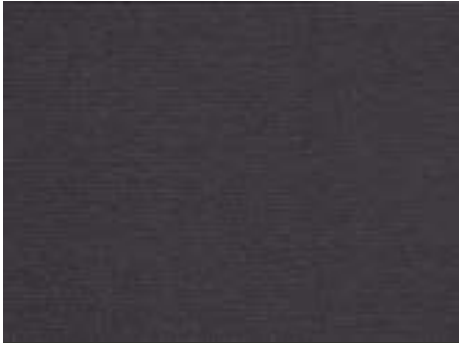

Licorice (Grey Back)

SWITCH ROOM DARKENING

Fabric Specifications

Applications	
Quality	100% Polyester with Acrylic Foam Coating (100% Free of PVC, Formaldehyde and Halogen to help reduce toxins in your environment).
Country of Origin	Australian Made
Width	Maximum Roller Width – 3000mm Maximum Roman Width – 2930mm
Weave & Opacity	Plain weave with acrylic foam coating to achieve room darkening opacity.
Weight	435 gr/m ² ± 10%
Thickness	0.56mm ± 10%
Custom Colour	Available for orders over 500lm.
Printing	Suitable for screen printing. Ask for more details.
Fire Classifications	AWTA AS1530.2 1993, AWTA AS1530.3 1993
Lightfastness	AWTA test AS 2001.4.21–2006: 6–7 Fabric with a 5+ result offers excellent resistance to the fading effect of light.
VOC Test	ASTM: D5116
Fabric Treatment	Treated with stain and soil release finish protector for easy care of fabric.
Fabric Warranty	7 years (internal use only)
Care Instructions	Do not allow dust to accumulate. Gently vacuum with appropriate attachment. Do not dry clean. Test in an inconspicuous area with mild detergent solution before spot cleaning. When spot cleaning do not allow that area to become fully wet, use damp cloth only.

Light and Solar Optical Properties

	Independently tested to ASHRAE 74–1988						Shading Coefficient
Colour	Ts	Rs	As	Tv/Vlt	Tuv	O–F	G–Value
Ghost	0	74	26	0	0	0	0.23
Knight with Grey Back	0	75	25	0	0	0	0.23
Licorice	0	74	26	0	0	0	0.23

Legend to Light and Solar Optical Properties Abbreviations:

Ts	Solar Transmittance (%)	Rs	Solar Reflectance (%)	As	Solar Absorbance
Tv/Vlt	Visible Light Transmittance (%)	Tuv	Ultraviolet Transmittance (%)	O–F	Openness Factor