

TOUCHLINE CF375


Technical Specifications Creasing & Folding

Feeder system	suction feeder	Minimum crease distance	30 mm
Feeder capacity	180 mm / 660 mm*	Fold system	Multigraf Pro-Knife
Paper size minimum	105 x 148 mm	Number of folds	2
Paper size maximum	375 (370*) x 660 mm 375 (370*) x 1'050 mm with table extension	Fold length minimum	30 mm
Paper stocks	80-400 gsm or max. 0.4 mm**	Fold length maximum	500 mm
Control panel	touchscreen	Delivery belt length	820 mm
Double sheet detection	ultrasonic	Reception tray height	120 mm
Creasing system	Multigraf Swingbar	Speed	depending on job, up to 6'000 sh./h
Creasing styles	1 creasing bar = 2 styles	Dimension	ca. 1'820 x 610 x 1'320 mm ca. 2'790 x 680 x 1'320 mm*
Crease depths	3 automatic setups	Weight	ca. 196 kg / 311 kg*
Number of creases	20	Electrical connection	100-240 VAC, 50/60 Hz

*CF375 with Mistral Feeder PFM

**Paper stocks depending on material quality

TOUCHLINE CF375 supports the following common fold types:

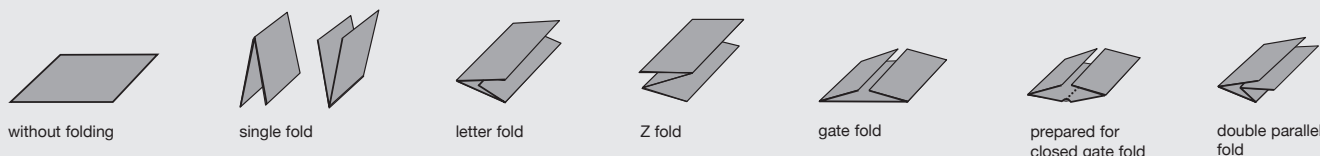

Double sheet detection
A professional ultrasonic double sheet detection system which offers a 100% control of all sheets running through the machine.



Two delivery sections
The delivery side consists of two different output levels. For creasing and folding, the upper delivery belt is used. For creasing only the lower reception tray.



Perforating device
An online perforating device is available for the lower exit level as an option.

Max Size 375 x 1050mm	Min Size 105 x 148mm	80- 400 gsm	2 Folds	Max Creases 20	Speed 5000 A4/hour	Speed 6000 A5/hour
-----------------------------	----------------------------	-------------------	---------	-------------------	--------------------------	--------------------------

