


# X5 (Gen 2)


The X5 utilizes fiberglass-reinforced thermoplastic to create parts 10x as strong as standard printing plastics. Our laser-assisted, durably built large format machine reliably produces high-strength parts at an affordable price point in any environment.

<b>Printer Properties</b>	<b>Process</b>	Fused filament fabrication, Continuous Filament Fabrication
	<b>Build Volume</b>	330 x 270 x 200 mm (13 x 10.6 x 7.9 in)
	<b>Weight</b>	48 kg (106 lbs)
	<b>Machine Footprint</b>	584 x 483 x 914 mm (23 x 19 x 36 in)
	<b>Print Bed</b>	Kinematic coupling — flat to within 80 µm
	<b>Laser</b>	Bed leveling, active print calibration
	<b>Extrusion System</b>	Second-generation extruder, out-of-plastic and out-of-fiber detection
	<b>Power</b>	100–240 VAC, 150 W (2 A peak)
	<b>RF Module</b>	Operating Band 2.4 GHz Wi-Fi Standards 802.11 b/g/n
<b>Materials</b>	<b>Plastics Available</b>	Onyx, Onyx FR, Onyx ESD, Nylon White, P-PLA, S-TPU
	<b>Fibers Available</b>	Fiberglass
	<b>Tensile Strength</b>	590 MPa (19.0x ABS, 1.9x 6061-T6 Aluminum) *
	<b>Tensile Modulus</b>	21 GPa (9.4x ABS, 0.3x 6061-T6 Aluminum) *
<b>Part Properties</b>	<b>Layer Height</b>	100 µm default, 50 µm minimum, 200 µm maximum
	<b>Infill</b>	Closed cell infill: multiple geometries available
<b>Software</b>	<b>Supplied Software</b>	Eiger Cloud (Other options available at cost)
	<b>Security</b>	Two-factor authentication, org admin access, single sign-on

FRONT VIEW

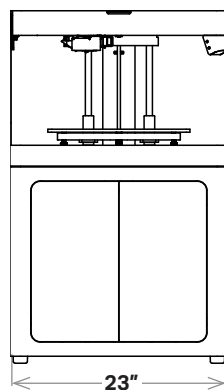

SIDE VIEW

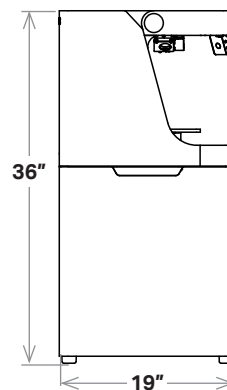

\* Continuous fiberglass data. **Note:** All specifications are approximate and subject to change without notice.