

# Air-O-Max

EXHAUST FAN

For over 25 years, VENTEC CANADA has been helping its clients optimize the efficiency of their operations.

VENTEC CANADA products reduce animal heat stress, diseases, injuries and mortality through innovative solutions for effective and durable ventilation.

VENTEC CANADA products is via an international distribution network.

**Contact us to find your nearest dealer.**



T.: 450 383-4000  
F.: 450 383-4004  
info@ventec.ca

4000, Pinard Avenue  
Saint-Hyacinthe, Québec J2S 8K4



# AIR-O-MAX

EXHAUST FAN

[www.ventec.ca](http://www.ventec.ca)




# AIR-O-MAX

EXHAUST FAN



Ventec AIR-O-MAX exhaust fans provide an energy efficient and cost-effective solution for exhausting air and moisture from all types of buildings including warehouses, garages, greenhouses and more.

It's the versatile solution for venting moderate amounts of air at a reasonable price.

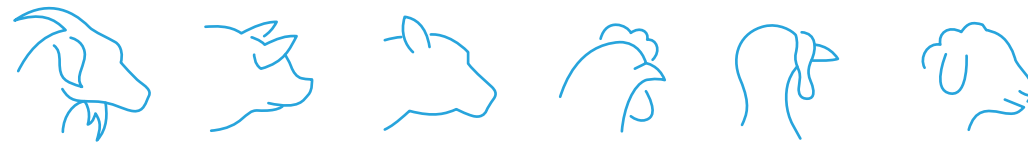

## Technical specifications

MODEL	POWER	VOLTAGE	RPM	SPEED	AIR FLOW	OPENING DIMENSION
12"	1/4 HP	115-230V	1625	VARIABLE	1 000 CFM (1700 m <sup>3</sup> /h)	15" X 15" (380 mm x 380 mm)
14"	1/4 HP	115-230V	1625	VARIABLE	1 400 CFM (2378 m <sup>3</sup> /h)	17.25" X 17.25" (440 mm x 440 mm)
16"	1/4 HP	115-230V	1625	VARIABLE	2 400 CFM (4077 m <sup>3</sup> /h)	19.25" X 19.25" (490 mm x 490 mm)
18"	1/3 HP	115-230V	1625	VARIABLE	3 200 CFM (5436 m <sup>3</sup> /h)	21.25" X 21.25" (540 mm x 540 mm)
20"	1/3 HP	115-230V	1625	VARIABLE	3 800 CFM (6456 m <sup>3</sup> /h)	23.25" X 23.25" (590 mm x 590 mm)
20"	1/2 HP	115-230V	1625	VARIABLE	4 800 CFM (8155 m <sup>3</sup> /h)	23.25" X 23.25" (590 mm x 590 mm)
24"	1/2 HP	115-230V	1625	VARIABLE	5 700 CFM (9684 m <sup>3</sup> /h)	27.25" X 27.25" (690 mm x 690 mm)
36"	1 HP	115-230V	900	SINGLE	12 000 CFM (20388 m <sup>3</sup> /h)	40.25" X 40.25" (1 020 mm x 1 020 mm)

## FEATURES

### DESCRIPTION


<b>Application</b>	Exhaust Fan 12" to 36" sizes. Economical-Reliable-Easy to install. Ideal for Poultry and Swine Breeding Farm Buildings.
<b>Drive type</b>	Direct drive
<b>Housing</b>	Impact resistant Polypropylene, UV protection, Available in black or white
<b>Propeller</b>	Fiberglass reinforced airfoil blades (galvanized blades for 36" fan).
<b>Shutter</b>	Easy maintenance, robust PVC shutter
<b>Motor for 12" to 24" fans</b>	Single Phase, 1/4 to 1/2 HP, 115/230 V, 1625 RPM, Variable Speed, Totally Enclosed Air Over (TEAO), Automatic Reset Thermal Protection,
<b>Motor for 36" fans</b>	Single Phase, 1 HP, 115/230 V, 900 RPM, Single Speed, Totally Enclosed Air Over (TEAO), Automatic Reset Thermal Protection



## Accessoires



High density polyethylene hood. Available in black or white.

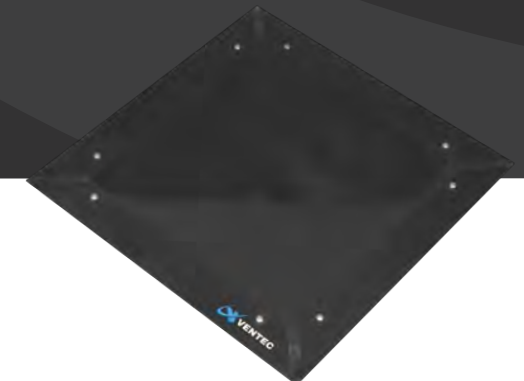

Insulated winter cover. Available in black or white.