

## 2' X 2' PLASTIC LAY-IN SUPPLY



**3 CONE**  
**HT-2X2-SPL**  
BOOT DIAMETER OPTIONS

6"	HT-2X2-SPL6
8"	HT-2X2-SPL8
10"	HT-2X2-SPL10
12"	HT-2X2-SPL12



**BORDERED**  
**HT-2X2-BSPL**  
BOOT DIAMETER OPTIONS

6"	HT-2X2-BSPL6
8"	HT-2X2-BSPL8
10"	HT-2X2-BSPL10
12"	HT-2X2-BSPL12
14"	HT-2X2-BSPL14




**PLAQUE**  
**HT-2X2-PSPL**  
BOOT DIAMETER OPTIONS

6"	HT-2X2-PSPL6
8"	HT-2X2-PSPL8
10"	HT-2X2-PSPL10
12"	HT-2X2-PSPL12
<b>BULLS-EYE</b>	HT-2X2-PSPLBE

• 2' X 2' Lay-In 3 Cone, Bordered, and Magnetic Plaque Diffuser Models • 3 Cone and Bordered both featuring an Easy Attach Knob • Magnetic Plaque featuring a Magnetic Engagement System (With Over 24 lbs. of Pull Force) • Standard White or Black Premix ABS (Additional Color Options Available) • Won't Rust, Corrode, Discolor, or Fade • Less conductive than metal (More resistant to "sweating") • Simple install and removal of diffuser for fast and efficient cleanability — Patent Pending




1. Easily attach to flex duct with cable tie/tape to pre-molded boot or boot added to Bulls-Eye Back. Install Supply Back into drop ceiling grid without grille faces attached. Also available with Insulated Back option.
2. **3 CONE & BORDERED:** Insert Easy Attach Knob in grille face. Screw in center knob to connect to crossbar in boot. **MAGNETIC PLAQUE:** Line up four guide pins in grille face with four receptors in Supply Back. Magnetic Engagement System in Plaque stays in place with over 24 lbs of Pull Force.
3. Remove the 3 Cone and/or Bordered Diffuser by simply unscrewing Easy Attach Knob. Remove the Magnetic Plaque by pulling away from Supply Back. Grille face and Supply Back can be cleaned with mild detergent. Test on inconspicuous spot to avoid discoloration.



## 2' X 2' PLASTIC LAY-IN RETURN

### HT-2X2-RTN & HT-2X2-ERTN WITH 6" - 16" INLET OPENING

- 2' X 2' Lay-In Louver (HT-2X2-RTN) and Egg Crate Return (HT-2X2-ERTN) Models
- Holds 20" X 20" X 1" or 20" X 20" X 2" filters (FILTER NOT INCLUDED)
- Cut Away Bulls-Eye Back with 6" - 16" Inlet Size Options—Compatible with any standard metal collar.
- Standard White or Black Premix ABS
- Won't Rust, Corrode, Discolor, or Fade

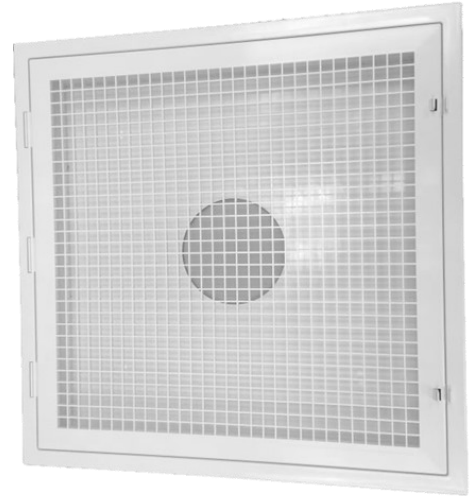

- Less conductive than metal (More resistant to "sweating")
- Includes packet of four (4) 1" stand offs — Peel off gasket back and stick on inside of Return Frame in each corner approximately 1" from each side to offer additional space between filter and inlet opening.



### EASY INSTALLATION

1. Cut Bulls-Eye to appropriate diameter and insert start collar - to customize Bulls-Eye simply cut slits perpendicular to the bulls-eye and use pliers to snap section. A 2" - 3" section can easily be snapped off.
2. Install Return into drop ceiling grid by attaching collar on back to pipe or flex duct.
3. Release grille face by pinching two clips and slowly lowering grille face until it hangs at 90 degrees. Filter can be changed. When cleaning grille face, swing grille face past 90 degrees to release from frame. Grille face and frame can be cleaned with mild detergent. Test on inconspicuous spot to avoid discoloration.

