


SE

2200 Series

High Speed, Rigidity and Productivity Economical CNC Turning Center

HYUNDAI WIA CNC Turning Center

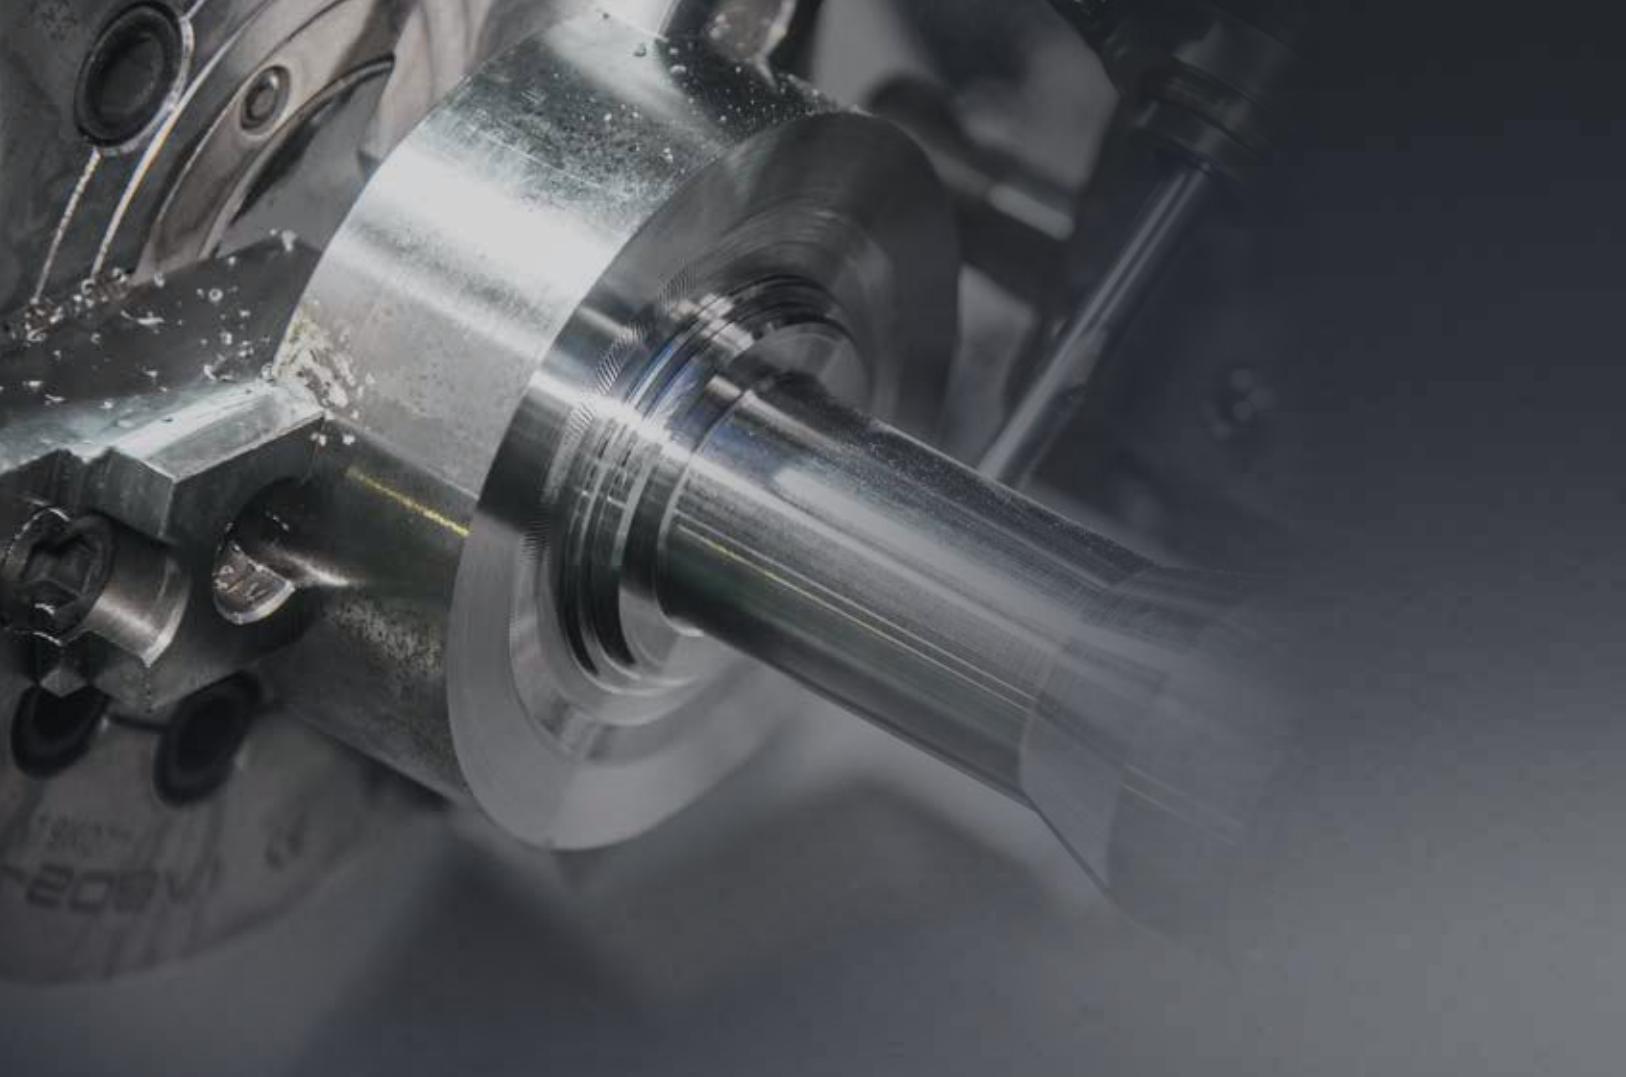

Technical Leader ▶

The CNC Turning Center SE Series, designed with HYUNDAI WIA's engineering expertise to maximize productivity by enhancing rigidity and accuracy of machining.

ITEM	Main Sp.			Sub Sp.	Bed Type		Turret		
	6"	8"	10"		5"	Std. Bed	Long Bed	Std. Turret	BMT45
SE2200A	●					●		●	
SE2200LA	●						●	●	
SE2200MA	●					●			●
SE2200LMA	●						●		●
SE2200LMSA	●			●			●		●
SE2200		●				●		●	
SE2200L		●					●	●	
SE2200M		●				●			●
SE2200LM		●					●		●
SE2200LMS		●		●			●		●
SE2200LC			●				●	●	
SE2200LMC			●				●		●
SE2200LMSC			●	●			●		●

SE

2200 Series

Global-standard CNC Turning Center with High Speed, Rigidity and Productivity

- 30° slanted one-piece bed structure with high rigidity
- Ensured high-rigidity applying Roller guideway on all axes (X/Z-axis: 30/36m/min)
- Improved user convenience by applying the latest controller of FANUC
- Prepared user-oriented lineup including long-bed, mill turret and sub-spindle
- Compact structure with internal-motor design (for standard-type bed)
- Ergonomic design for convenient access to chuck and tool





Cutting Possibility

APPLICATIONS & PARTS

Reduced machining time by HYUNDAI WIA's Technique

SE Series has been designed with robust box guide, spindle and travel system, maximizing precision and minimizing thermal displacement when process the products.

CARRIER PLANET



SHAFT




FLANGE



DRIVE GEAR




MACHINING CAPABILITY



O.D Turning
(Material : SM45C)

Machining Dia.	Ø80 mm (Ø3.1")
Machining depth	4 mm (0.16")
Cutting speed	215 m/min
Spindle rpm	856 r/min
Forwarding speed	0.5 mm/rev
Chip discharging amount	430 cc/min



U-Drill
(Material : SM45C)


Tool Dia.	Ø60 mm (Ø2.4")
Cutting speed	190 m/min
Spindle rpm	1,011 r/min
Forwarding speed	0.17 mm/rev
Chip discharging amount	486 cc/min

SE2200LM

❖ The above result might be different by types of processing circumstances.

01 BASIC STRUCTURE

The Best Productivity 6" / 8" / 10" Compact CNC Turning Center

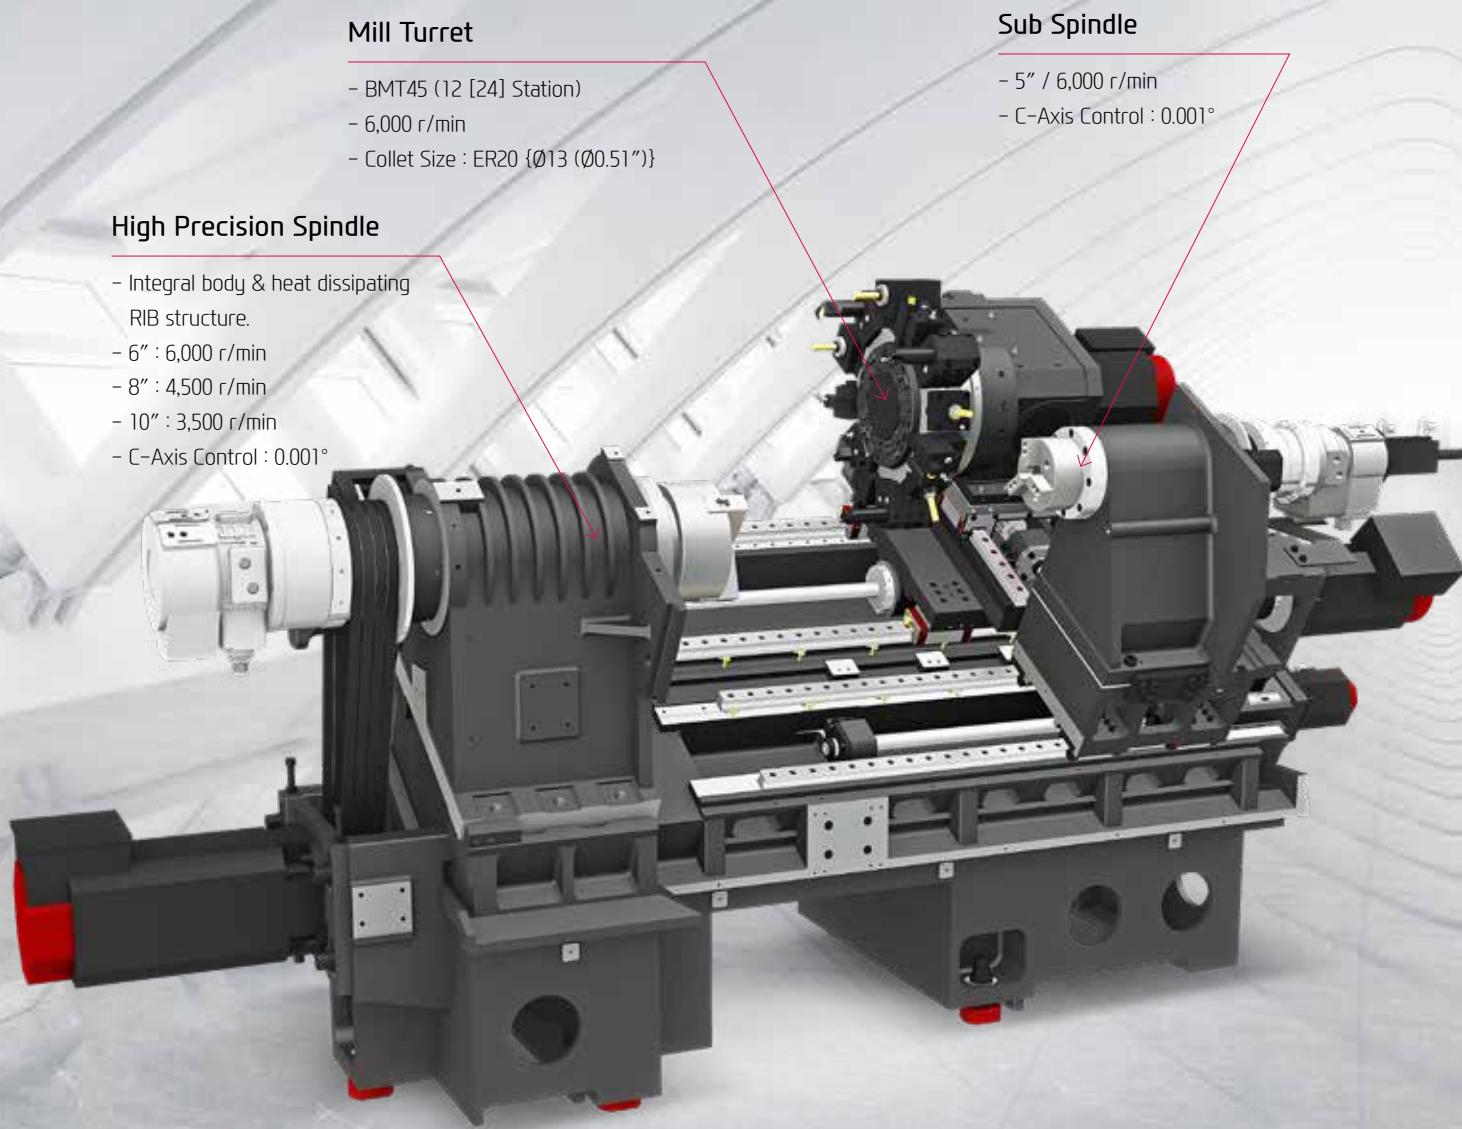

REDUCTION OF NON-CUTTING TIME BY FAST RAPID SPEED


ALL-IN-ONE TYPE OF BED

Optimal Structural Analysis

Structural analysis was applied to the design of the machine to increase the tool post body and reduce the machine's height so as to maintain the bed's dynamic rigidity even during high-speed machining. In addition, the SE Series bed slope is pitched at 30 degrees to ensure more stable machining.




ENHANCED VIBRATION ABSORPTION THANKS TO INCREASED GROUND AREA

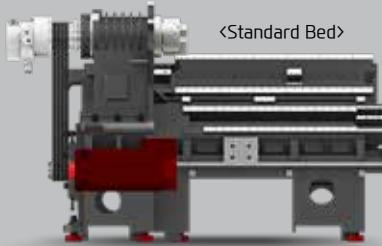

Floor Space (L×W) – Standard Bed

2,120×1,610 mm (83.5"×63.4")

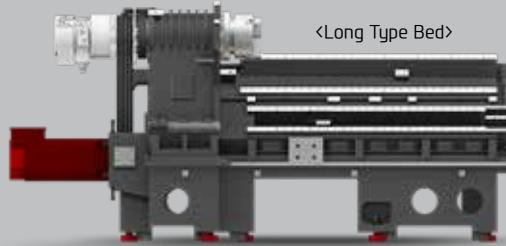

Floor Space (L×W) – Long Type Bed

2,970×1,610 mm (116.9"×63.4")


GUIDEWAY

High-Speed Roller LM Guideway

Linear roller guideways are applied to reduce non-cutting time and bring high rigidity.

RIGIDITY HAS INCREASED 30% COMPARED TO THE BALL BEARING LM GUIDE

Rapid Traverse Rate (X/Z) **30/36** m/min (1,181/1,417 ipm)

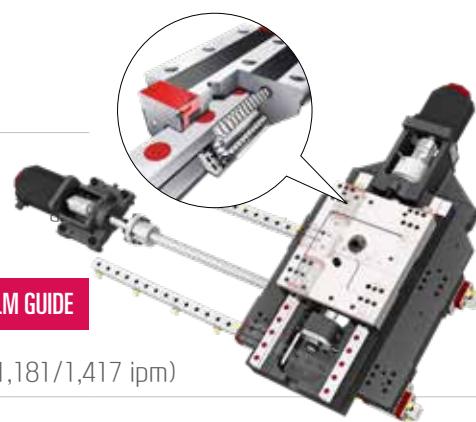

Travel (X/Z)

Standard Bed

210/340 mm (8.3"/13.4")

Long Type Bed

210/560 mm (8.3"/22")

02 HIGH PRECISION SPINDLE

Long Lasting, High Accuracy & Excellent Performance CNC Turning Center

Spindle Specifications

[] : Option • : Power Up

ITEM	Spindle Speed	Motor (Max./Cont.)	Torque (Max./Cont.)	Driving Method
6" Spindle	6,000 rpm (FANUC)	15/11 kW (20/15 HP)	127/70 N·m (93.7/51.6 lbf·ft)	Belt
	[6,000 rpm (iTROL)]	[13.5/9 kW (18/12 HP)]	[114.5/76.4 N·m (84.5/56.3 lbf·ft)]	
8" Spindle	4,500 rpm (FANUC)	15/11 kW (20/15 HP)	167/92 N·m (123.2/67.9 lbf·ft)	Belt
	[4,500 rpm (iTROL)]	[13.5/9 kW (18/12 HP)]	[150.3/100 N·m (110.9/73.8 lbf·ft)]	
10" Spindle	3,500 rpm (FANUC)	18.5/11 kW (25/15 HP)	269/120 N·m (198.4/88.5 lbf·ft)	Belt
	[3,500 rpm (FANUC)]	[18.5/15 kW (25/20 HP)]	[269/164 N·m (198.4/121 lbf·ft)]	
	[3,500 rpm (iTROL)]	[13.5/9 kW (18/12 HP)]	[197.6/132 N·m (145.7/97.4 lbf·ft)]	
Sub Spindle	6,000 rpm (FANUC)	7.5/3.7 kW (10/5 HP)	63.6/23.6 N·m (46.9/17.4 lbf·ft)	Belt
	[6,000 rpm (iTROL)]	[7.4/4.9 kW (9.9/6.6 HP)]	[47/31.1 N·m (34.7/22.9 lbf·ft)]	


HEAVY DUTY CUTTING & HIGH ACCURACY

MAIN SPINDLE

Specialized in High-speed and Rough Cutting

The 6" main spindle is designed for high-speed machining by applying two and three-row ball bearings to the front and rear, respectively. In addition, the 8" and 10" main spindles are designed to match the rigid spindle structure by combining the double-row roller bearing and the angular contact bearing, which provides excellent performance for heavy-duty cutting.

Moreover, we applied the ribstar belt to minimize the slip and noise of the belt during processing, and this improvement enhanced performance of the work and increased processing stability by minimizing bearing damage caused by inflow of the oil.

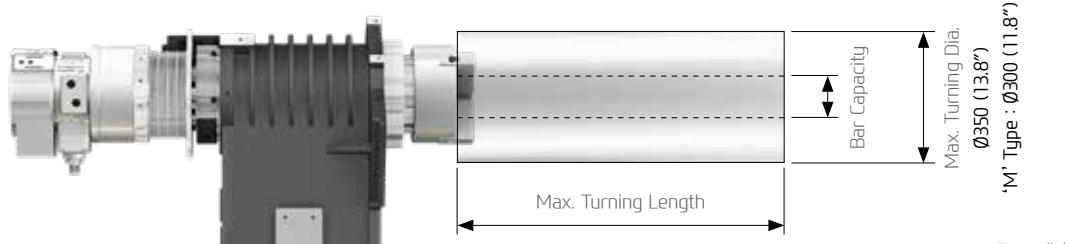

Max. Turning Length	Standard Bed		Long Type Bed		Bar Capacity 'M' Type : Ø300 (11.8'') unit : mm(in)
	Servo Turret	Mill Turret	Servo Turret	Mill Turret	
6 inch	340 (13.4")	309 (12.2")	560 (22")	529 (20.8")	Ø51 (Ø2")
8 inch	307 (12.1")	288 (11.3")	558 (22")	508 (20")	Ø65 (Ø2.6")
10 inch	-	-	549 (21.6")	499 (19.6")	Ø81 (Ø3.2")

❖ C-Axis Control ('M' Type)

C-axis of SE Series can be controlled to 0.001° which makes it possible to process various shapes.

SUB SPINDLE ('S' Type)

The Belt-type sub spindle is designed to minimize thermal displacement during the continuous machining, offering from the heavy-duty cutting to the high-speed machining. When the main spindle cutting is completed, the sub spindle rotation is synchronized with the main spindle allowing the workpiece to be transferred to the sub spindle, and machining can begin on the back side of the workpiece.



03 SERVO TURRET

High speed, High Accuracy, Highly Reliable Servo Turret



Servo Turret

No. of Tools	Tool Size (O.D/I.D)	Indexing Time
12 EA	□ 25/Ø40 mm (□ 1"/Ø1 1/2")	0.15 sec


BMT45 Mill Turret

Type	Speed	Motor (Max./Cont)	Torque (Max./Cont)	Collet Size
FANUC	6,000 rpm	3.85/2.59 kW (5.16/3.47 HP)	36.7/18.5 N·m (27.1/13.6 lbf·ft)	ER20 / Ø13 (0.6")
iTROL		Cont : 2.8 kW (3.8 HP)	Cont : 27 N·m (19.9 lbf·ft)	

Quantity of mill turret tools: Std. 2ea / Opt. 24ea - Various machining with increased capacity (Prior model : max. 12ea)

VARIOUS DRIVEN PRECISION BMT TOOL HOLDERS

SERVO TURRET

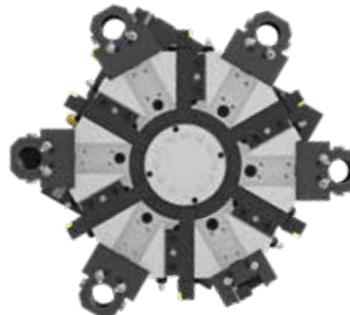

Servo Turret

The turret of SE series is applied with high performance AC servo motor, improving machining reliability. 3-piece coupling shows excellent performance in indexing. Powerful hydraulic tool clamping minimizes tool tip deviation caused by load.

70Bar High Pressure Coolant **OPTION**

Turret is designed to utilize **70bar** high pressure coolant and it shows optimum performance in machining difficult-to-cut material.



MILL TURRET

BMT45 Turret (Mill Turret)

The BMT turret secures the tool with four bolts and key on the tool mounting surface of the turret, making it possible to powerfully fix the tool, ensuring high reliability in rigidity and precision.




Mill Tool Holder

Machining capability has increased with the addition of straight milling head tool holder.

Increased Rotating Tools

Straight and angular milling haed 1ea > 2ea, respectively

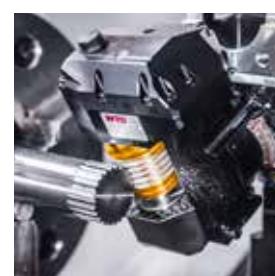

Special Tool

OPTION

The SE series can process high value-added products using a variety of rotating tools. In particular, there is a multi-holder for attaching a variety of tools to one holder, and an eccentric rotary tool for handling eccentric parts without additional axis travel, which can realize integration of process with one machine.

❖ Consultation needed when ordering these options.

04 USER CONVENIENCE

Various Devices for User Friendly


HYDRAULIC NC TAILSTOCK

Hydraulic NC Tailstock with Position Control ('L' Type Standard)

The hydraulic NC tailstock applied to the SE series enables independent transfer through a program independently of the turret movement and it simultaneously achieved "Improvement of user convenience" and "Reduction of cycle time".


General

Programmable Quill Tailstock

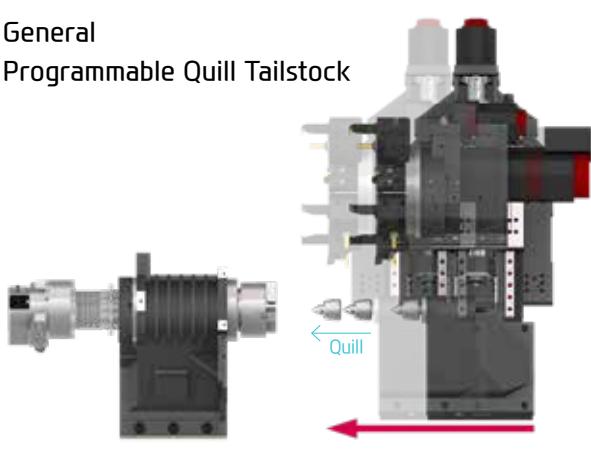


SE2200 Series

Hydraulic NC Tailstock

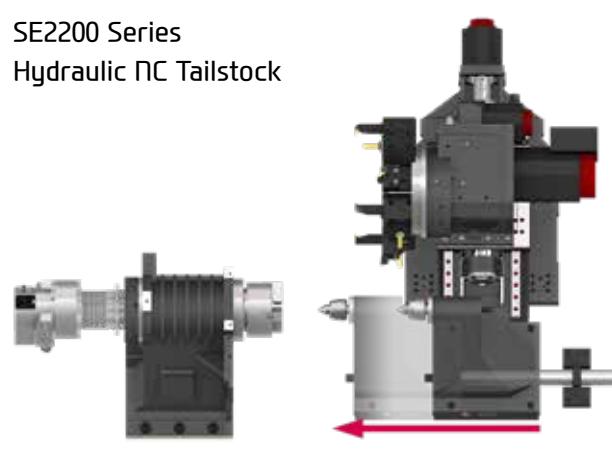

- › A structure that moves by fixing the tailstock to the turret
- › After fixing the tailstock, the quill operated by hydraulic pressure advances to stabilize the material
- › Automation configuration error due to interference with turret during configuration of automation

- › Structure in which the tailstock moves independently from the turret (position control : 0.1mm)
- › Stabilization of tailstock body hydraulic pressure
- › Turret moves independently while the tailstock moves to reduce machining setup time
- › Application of standard for long bed applied models among SE2200 Series (MT#4 live center application)

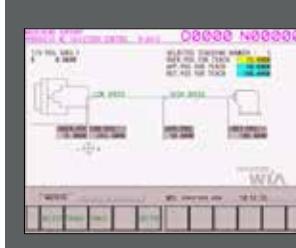

HW-TMS (TAILSTOCK OPERATION)

This software is capable of manipulation and data management of tailstock operations through intuitive GUI.



CHIP DISPOSAL SOLUTION

Timely and effective disposal of chips will enhance productivity as well as the working environment.

< Chip Discharge Height – Opt.1 : 860mm (33.9"), Opt. 2 : 1,200mm (47.2") >



- **Hinge Belt Type** : Highly efficient when disposing a lot of chips. Capable of handling stringy chips. (Long Chip)
- **Scraper Type** : Convenient for shortly cut chips. (Short Chip)
- **Screw Type** : Compresses and ejects chips to reduce chip Trouble. (Lower portion of micro-chips)
- **Drum Filter Type** : Advantageous in precision, as the chips do not flow in to the coolant nozzle. (Powder, Micro Chip)

HIGH PRECISION SYSTEM & COOLANT UNIT



Automatic Q-Setter



Linear Scale



Work Probe



Standard Coolant (Nozzle)



Chuck Coolant (Upper Chuck)



Chuck Air Blow (Upper Chuck)




Grease Lubrication Device

- PLC control allows for timely supply of extremely small amount of grease
- System alarm (low level, line blockage)
- Oil skimmer is unnecessary
- Up to 60% reduction of annual maintenance costs compared to ordinary lubricant oil

05 HYUNDAI WIA FANUC – SMART PLUS

The Compatible All-round Control

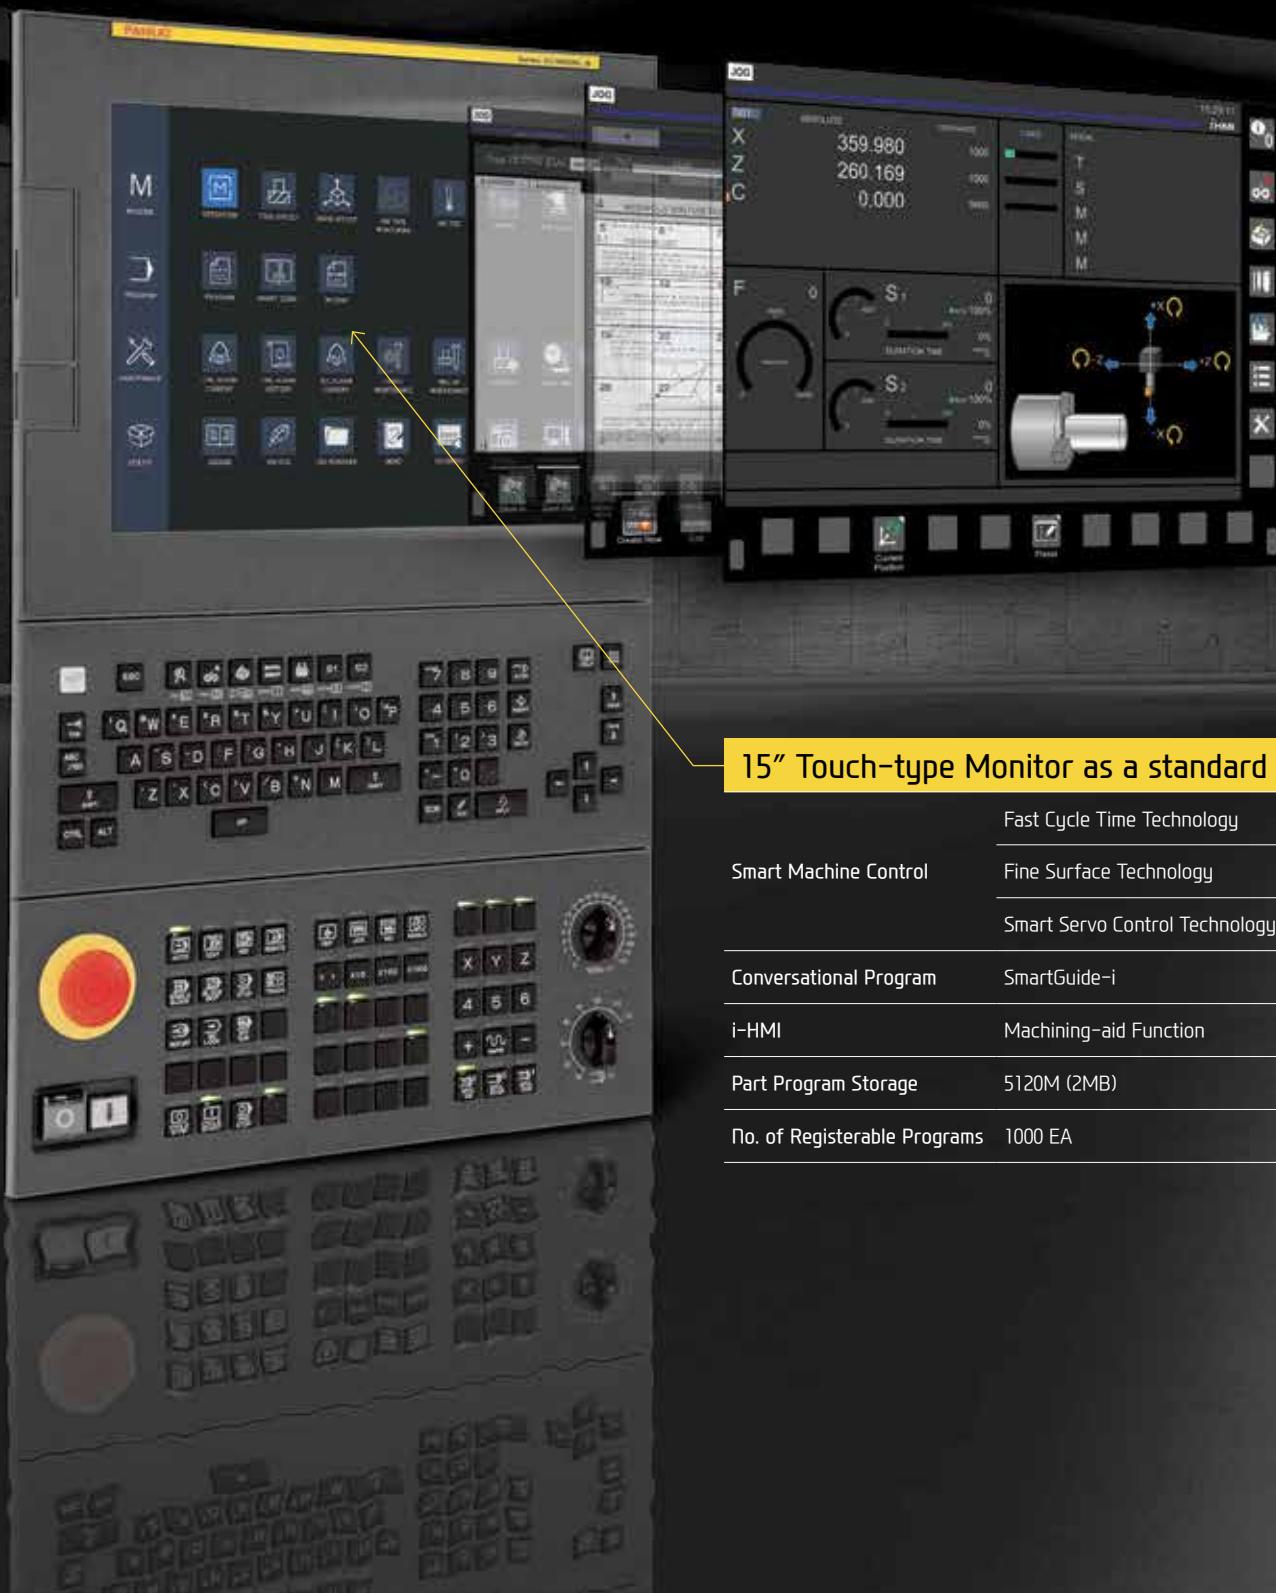

15" Touch-type Monitor as a standard

Smart Machine Control	Fast Cycle Time Technology
	Fine Surface Technology
	Smart Servo Control Technology
Conversational Program	SmartGuide-i
i-HMI	Machining-aid Function
Part Program Storage	5120M (2MB)
No. of Registerable Programs	1000 EA




SMART SOFTWARE



Dialogue Program (Smart Guide-i)

This software offers the maximum user convenience through dialogue manipulation from setup to processing. This includes writing processing programs and simulation checks.

Convenience Function S/W

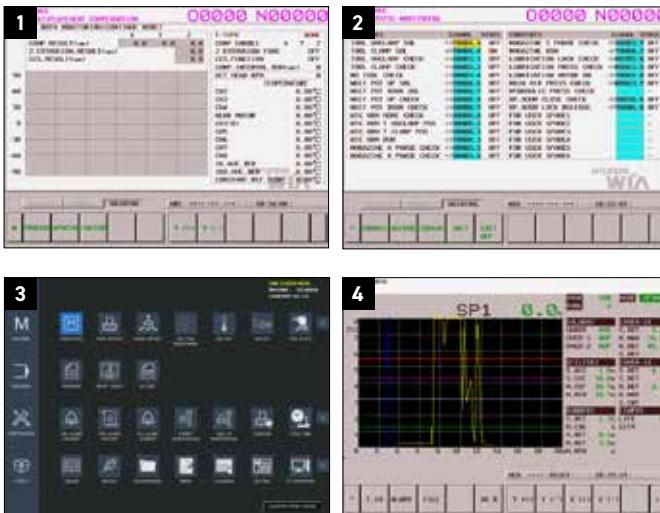

1. Thermal Displacement Compensation (HW-TDC) **OPTION**

This software improves processing precision by minimizing thermal deformation from changes in external environments and machining.

2. Machine Guidance (HW-MCG)

This software offers various user convenience functions such as tool manipulation, maintenance, tool monitoring, and a pop-up/status


3. LAUNCHER

This software offers shortcuts for quick access to specialized features and frequently used features.

4. Tool Monitoring (HW-TM) **OPTION**

This tool status monitoring software monitors and protects workpiece, tools, and equipment through real-time monitoring of the motor load from machining.

Machining Support S/W

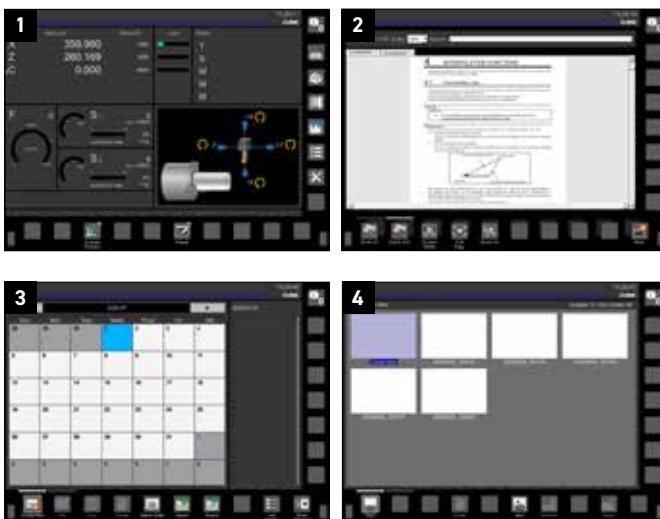

1. Premium Tool Operation

This software offers premium graphic functions for more intuitive tool operation. (Only in iHMI tools)

2. Manual Viewer

This software enables users to view electronic manuals right from the tool. (Only in iHMI tools)

3. Scheduling


This software enables viewing/setting up directly from the tool. This allows such actions as managing customer's tool schedules and schedule notification. (Only in iHMI tools)

4. Operation Memo

This software is capable of managing customer notes such as tool information and issues. (Only in iHMI tools)


SPECIFICATIONS

HYUNDAI WIA FANUC – SMART PLUS Spindle Output/Torque Diagram

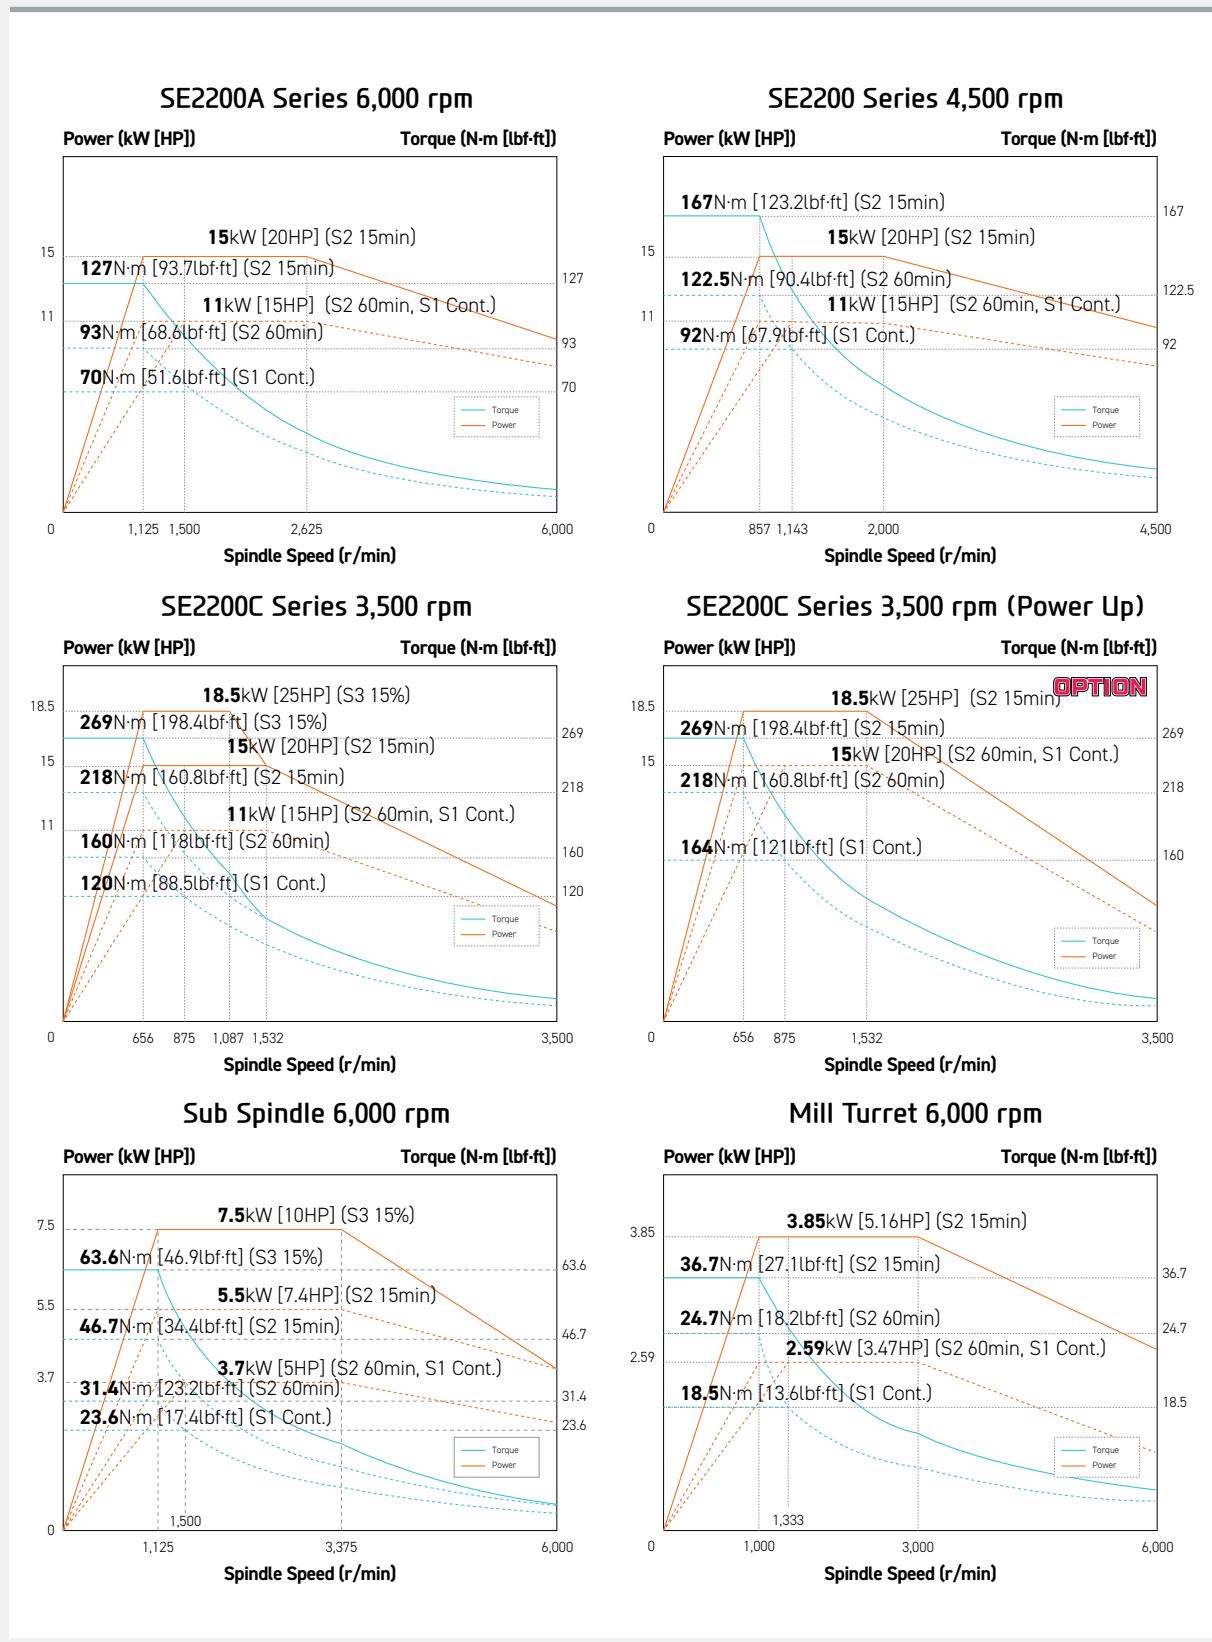

SPECIFICATIONS


HYUNDAI-iTROL Spindle Output/Torque Diagram

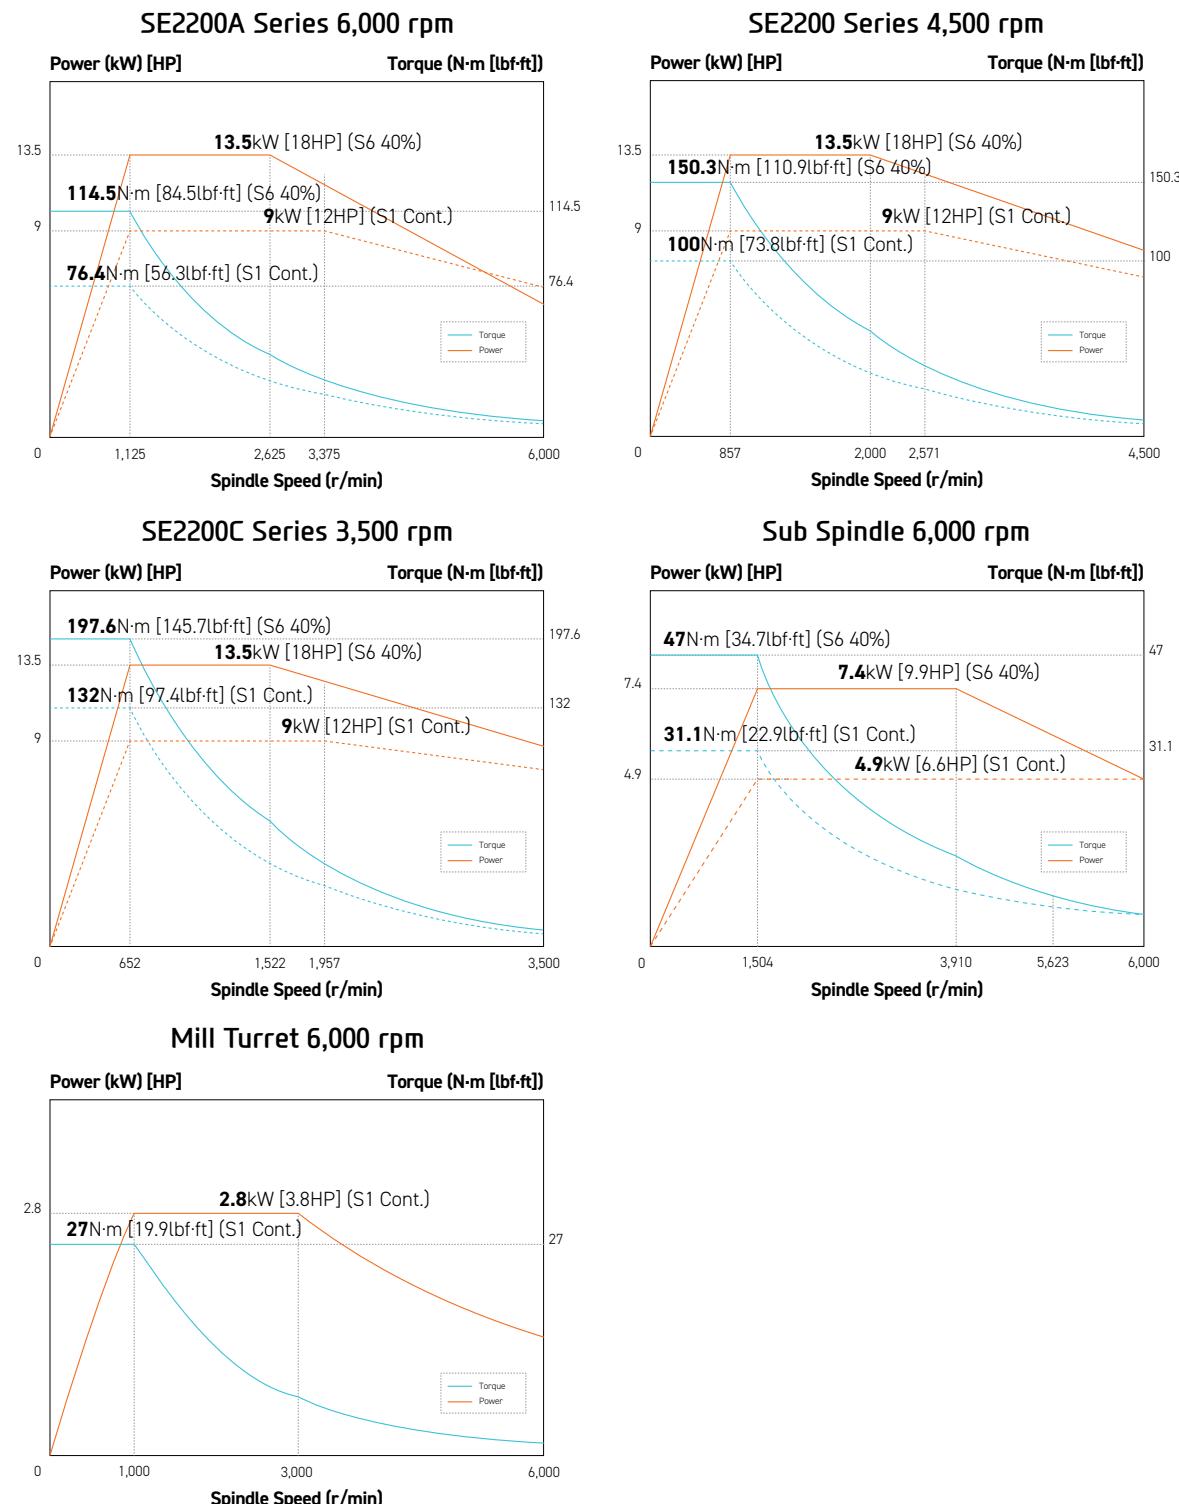

SPECIFICATIONS

External Dimensions

unit : mm(in)

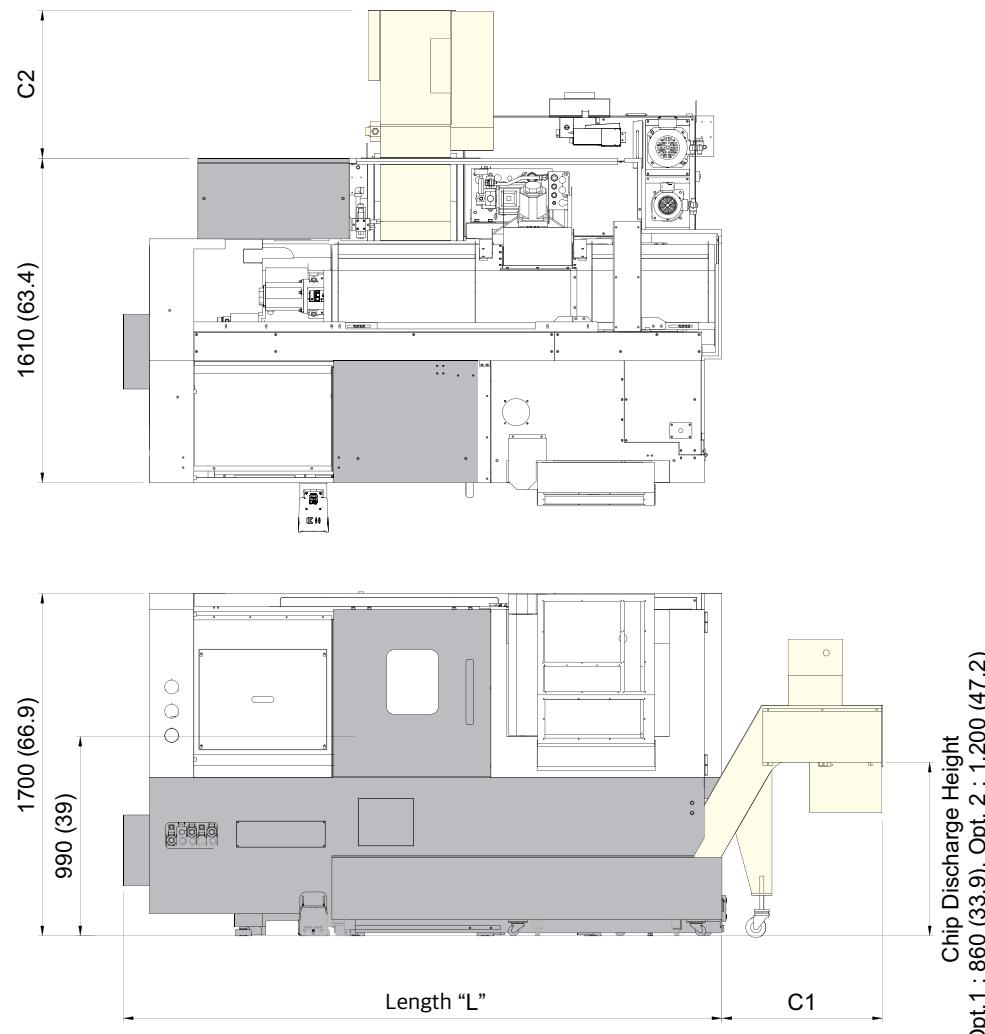


ITEM	SE Series	Length "L"
2-axis	SE2200A	2,120 mm (83.5")
	SE2200	2,190 mm (86.2")
	SE2200LA/L/LC	2,970 mm (116.9")
MILL	SE2200MA	2,150 mm (84.6")
	SE2200M	2,220 mm (87.4")
	SE2200LMA/LM/LMC	2,970 mm (116.9")
SUB	SE2200LMSA/LMS/LMSC	2,970 mm (116.9")
ITEM	Chip Discharge Height	C1 / C2
Chip Conveyor	Option 1 : 860 mm (33.9")	930 mm (36.6")
	Option 2 : 1,200 mm (47.2")	1,130 mm (44.5")

SPECIFICATIONS


Interference

unit : mm(in)

**SE2200A/LA
SE2200/L**

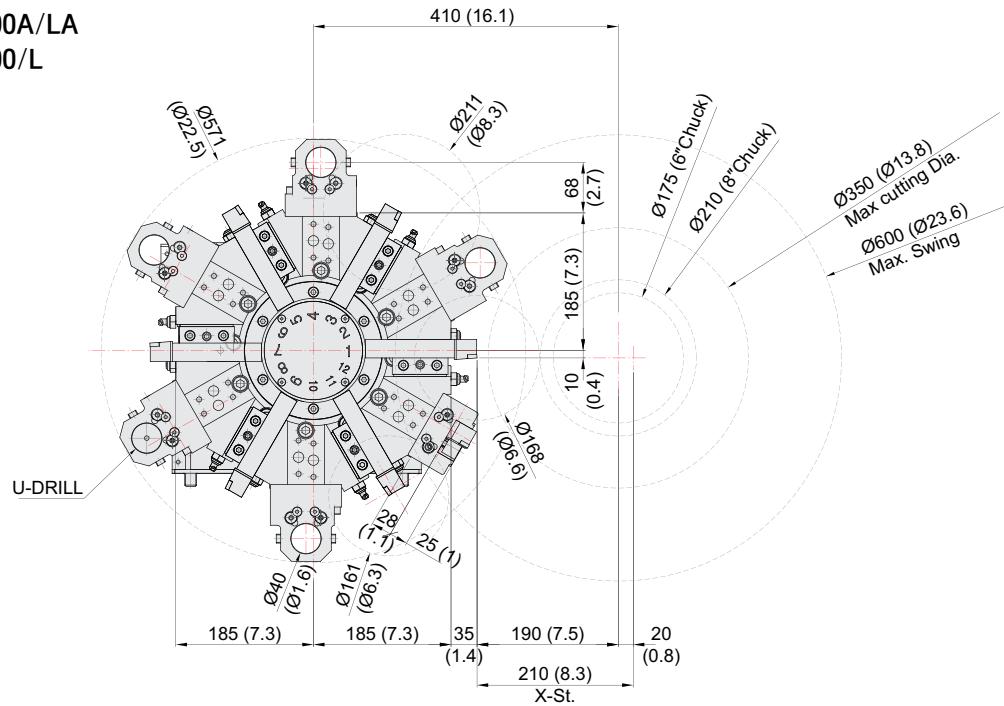

SE2200LC

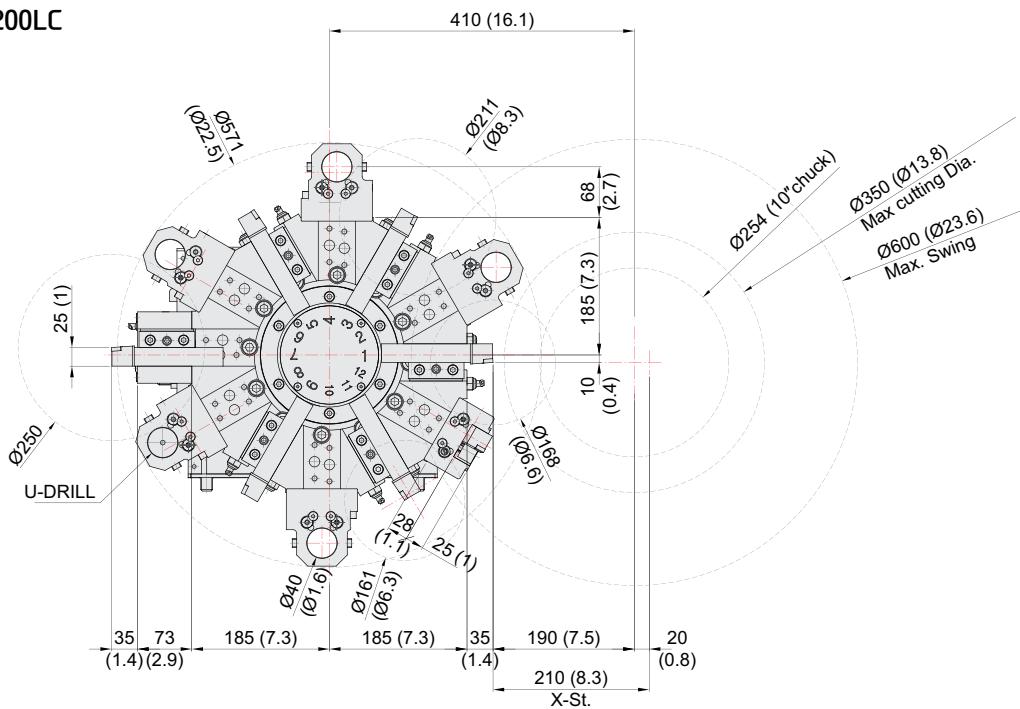


SPECIFICATIONS


Interference

unit : mm(in)

**SE2200MA/LMA
SE2200M/LM
SE2200LMC**

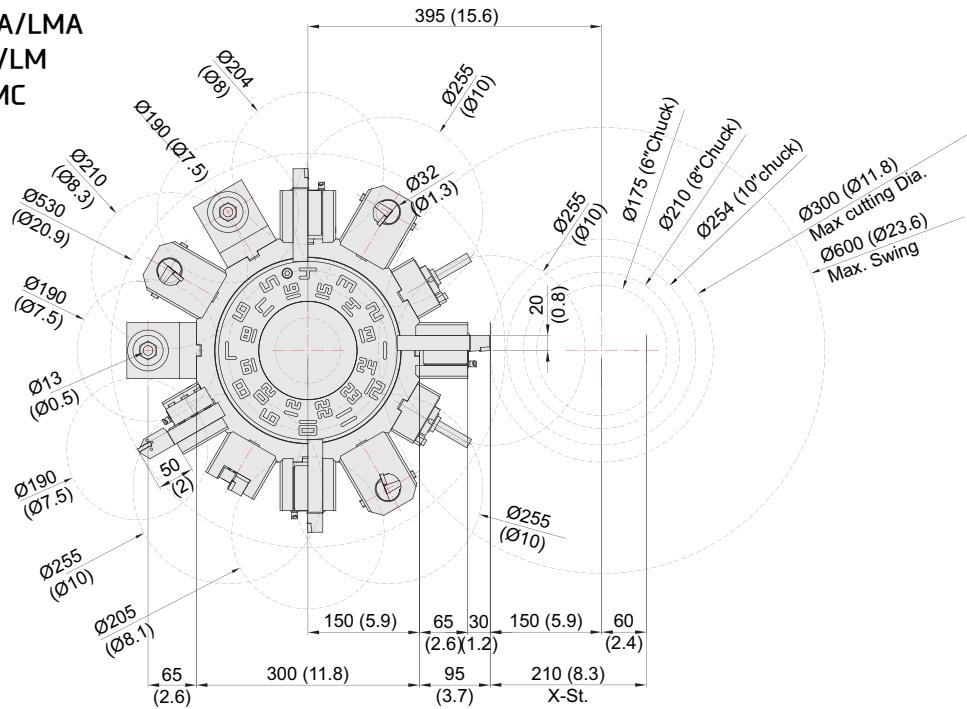


**SE2200LMSA
SE2200LMS
SE2200LMSC**

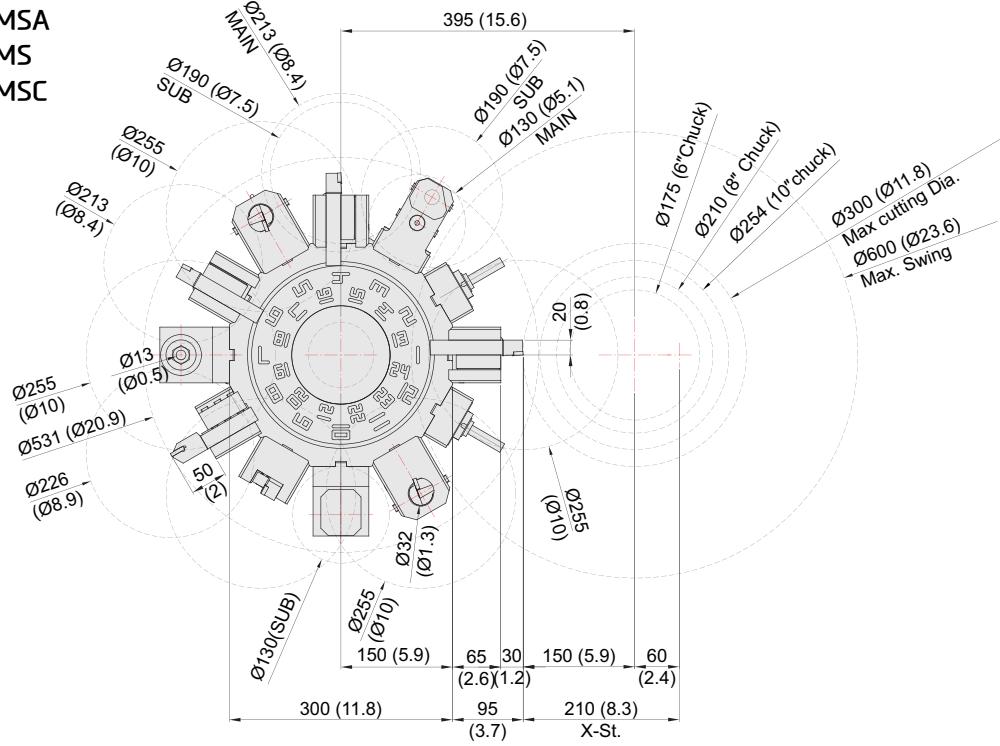

SPECIFICATIONS

Tooling System

unit : mm(in)

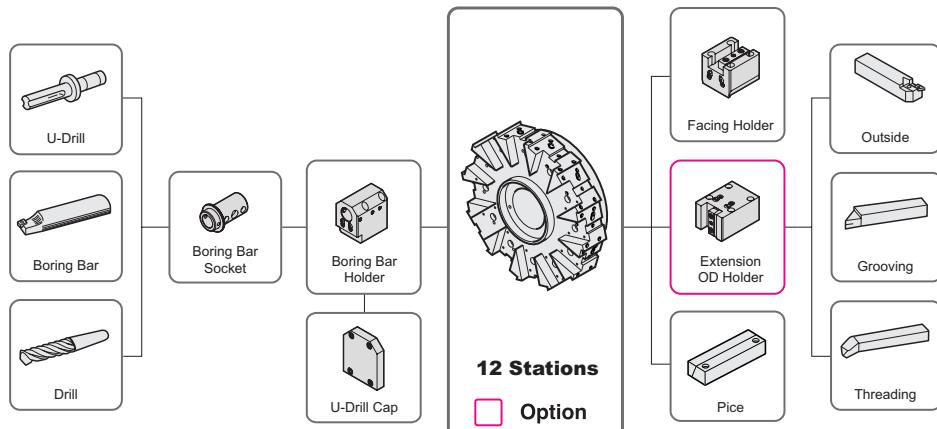

Std. Turret Tooling Parts Detail (SE2200/A/LA/L/LC)


ITEM		6/8 inch	10 inch
Turning Holder	Clamper	6	5
	O.D Holder	Extension	-
	Facing Holder		1
Boring Holder	I.D Holder	Single (Ø40, Ø1 1/2")	5
	U-Drill Holder	Cap	1
Driven Holder	Straight Mill Holder	Standard	-
		TTC	-
	Angular Mill Holder	Standard	-
		TTC	-
Socket	Boring	Ø10 (Ø3/8")	1
		Ø12 (Ø1/2")	1
		Ø16 (Ø5/8")	1
		Ø20 (Ø3/4")	1
		Ø25 (Ø1")	1
		Ø32 (Ø1 1/4")	1
	Drill	MT 1	Opt.
		MT 2	Opt.
	ER Collet		-

* Expansion external holder provided only for SE2200LC model

SPECIFICATIONS

Tooling System

unit : mm(in)

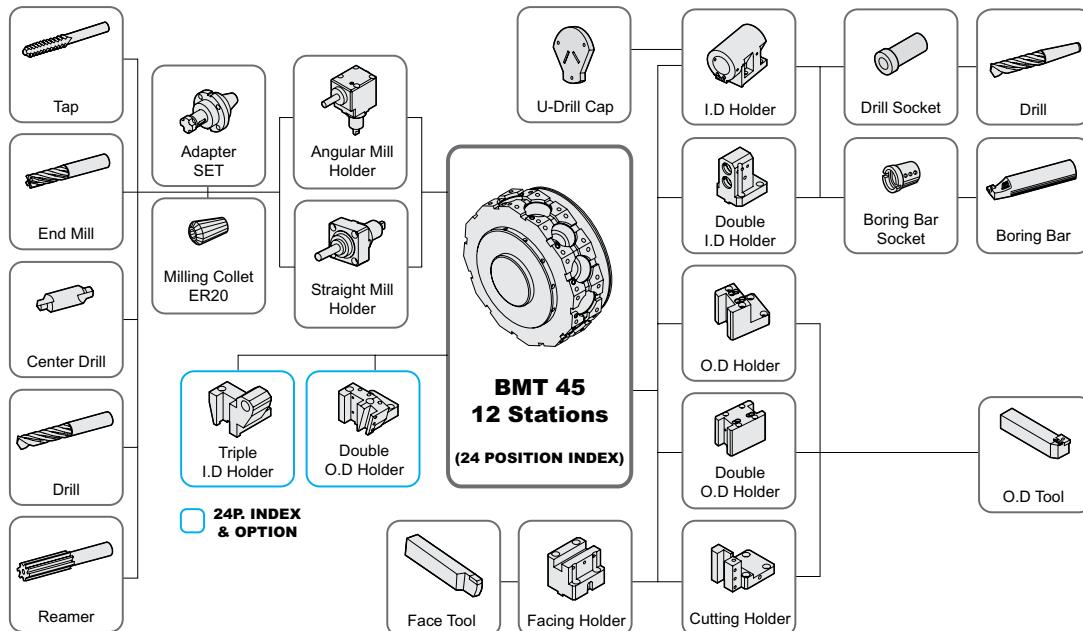

Mill Turret Tooling Parts Detail (SE2200MA/LMA/M/LM/LMC/LMSA/LMS/LMSC)

ITEM		"M" Type		"MS" Type	
		12 Stations	[24 Stations]	12 Stations	[24 Stations]
Turning Holder	O.D Holder	Right/Left	3	2	-
		Double	-	-	1
		Double (24P, Main)	-	1	-
		Double (24P, Sub)	-	-	1
	Facing Holder		1	1	1
Boring Holder	Cutting Holder		1	1	1
	I.D Holder	Single	2	1	-
		Double	-	-	1
		Triple	-	1	-
	U-Drill Holder	Cap	1	1	1
Driven Holder	Straight Mill Holder	Standard	2	2	2
	Angular Mill Holder	Standard	2	2	2
Socket	Boring	Ø10 (Ø3/8")	1	1	1
		Ø12 (Ø1/2")	1	1	1
		Ø16 (Ø5/8")	1	1	1
		Ø20 (Ø3/4")	1	1	1
		Ø25 (Ø1")	1	1	1
	Sub Boring	Ø8 (5/16")	-	-	1
		Ø10 (Ø3/8")	-	-	1
		Ø12 (1/2")	-	-	1
		Ø16 (5/8")	-	-	1
	Drill	MT 1	Opt.	Opt.	Opt.
		MT 2	Opt.	Opt.	Opt.
	ER Collet		1 Set	1 Set	1 Set
	Adapter Set		Opt.	Opt.	Opt.


Specifications are subject to change without notice for improvement.

SPECIFICATIONS


Tooling Travel Range (SE2200A/LA | SE2200/L/LC)

unit : mm(in)


O.D Tool

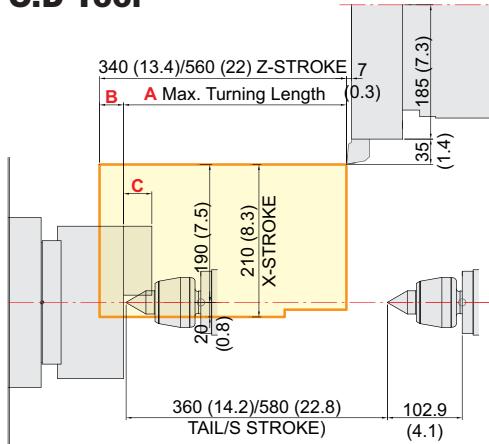


Face Tool

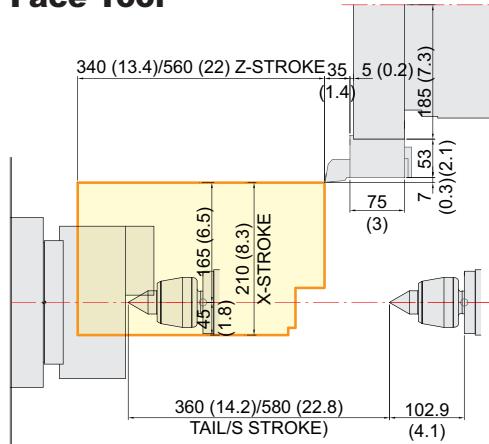

I.D Tool

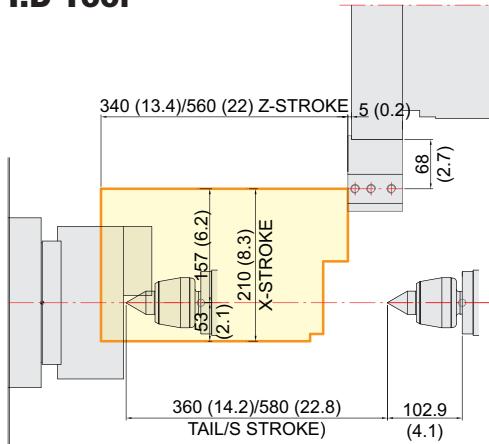

SE2200LC Extension Tool

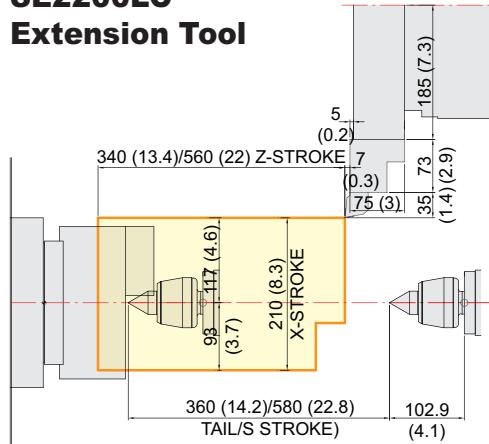


ITEM	A	B	C
SE2200A	340 (13.4)	-	32.5 (1.3)
SE2200LA	560 (22)		
SE2200	307 (12.1)	33 (1.3)	39 (1.5)
SE2200L	558 (22)	2 (0.08)	
SE2200LC	549 (21.6)	11 (0.43)	43 (1.7)

SPECIFICATIONS


Tooling Travel Range (SE2200MA/LMA | SE2200M/LM/LMC)

unit : mm(in)


O.D Tool

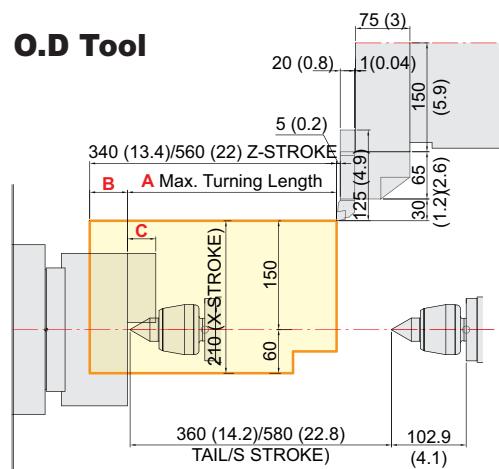


Straight Driven

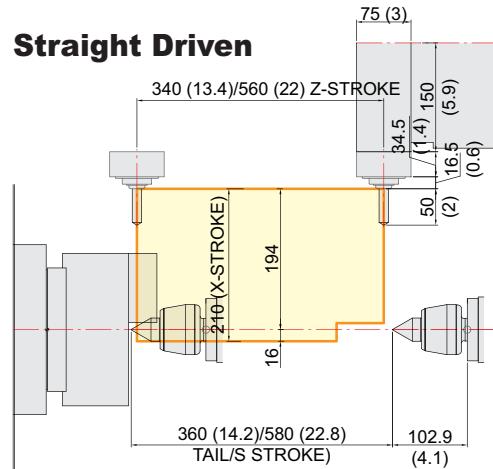


I.D Tool

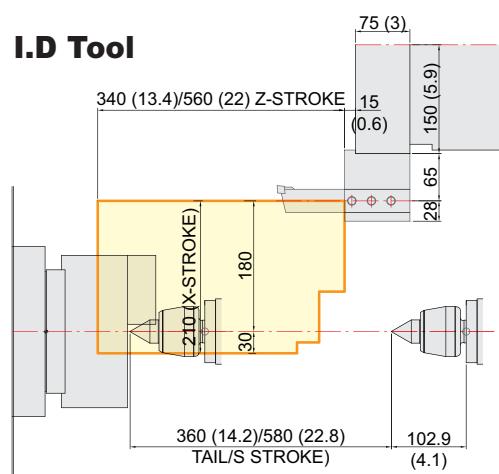

Angular Driven

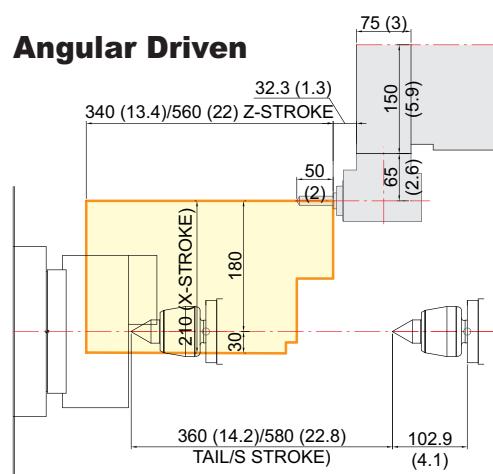

Face Tool

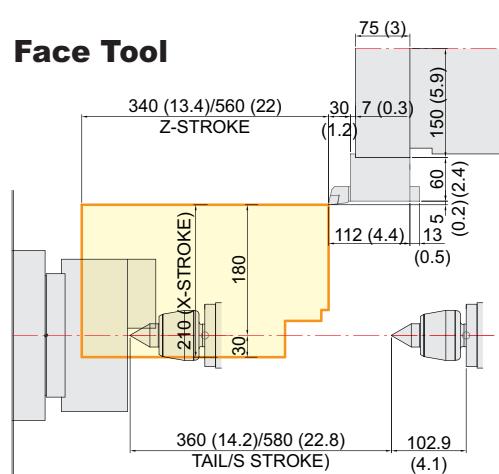


ITEM	A	B	C
SE2200MA	309 (12.2)	31 (1.2)	32.5 (1.3)
SE2200LMA	529 (20.8)		
SE2200M	288 (11.3)	52 (2)	39 (1.5)
SE2200LM	508 (20)		
SE2200LMC	499 (19.6)	61 (2.4)	43 (1.7)

SPECIFICATIONS

Tooling Travel Range (SE2200LMSA/LMS/LMSC)

unit : mm(in)

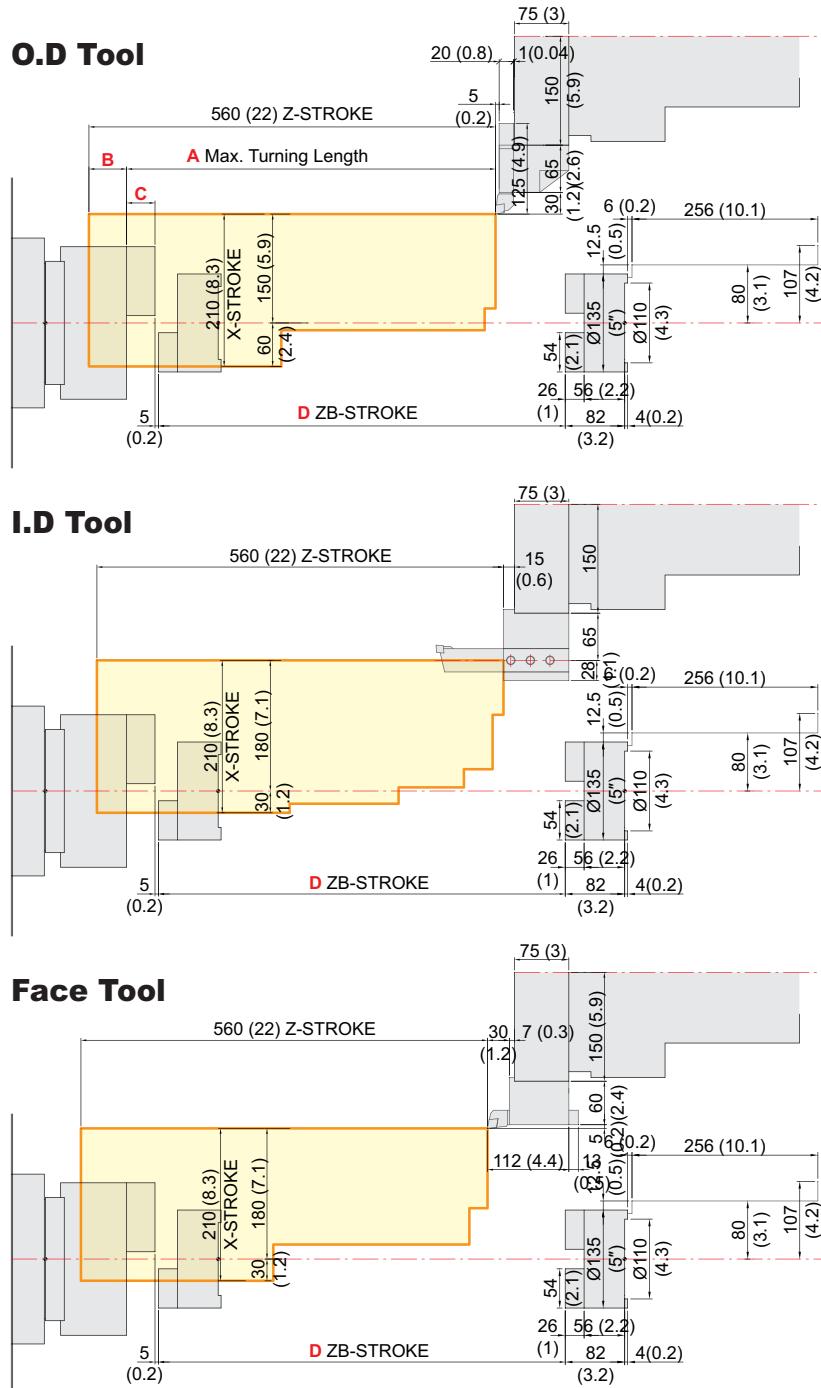


ITEM	A	B	C	D
SE2200LMSA	529 (20.8)	31 (1.2)	32.5 (1.3)	599.3 (23.6) [iTROL : 569.3 (22.4)]
SE2200LMS	508 (20)	52 (2)	39 (1.5)	560 (22) [iTROL : 530 (20.9)]
SE2200LMSC	499 (19.6)	61 (2.4)	43 (1.7)	547 (21.5) [iTROL : 517 (20.4)]

SPECIFICATIONS


Tooling Travel Range (SE2200LMSA/LMS/LMSC)

unit : mm(in)


Axial driven

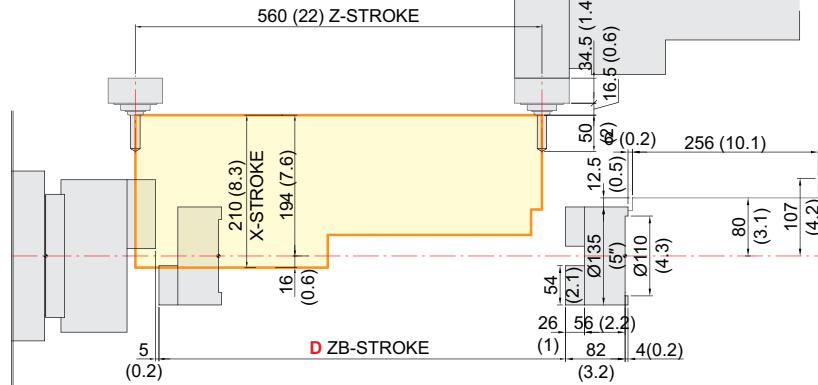

Angular driven

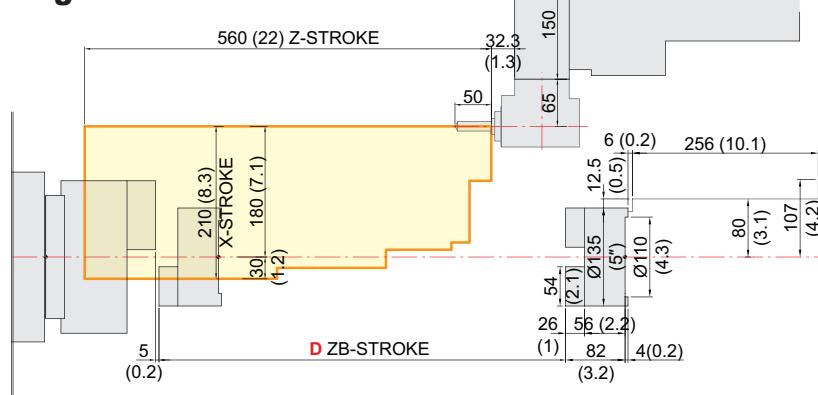

Sub Angular driven

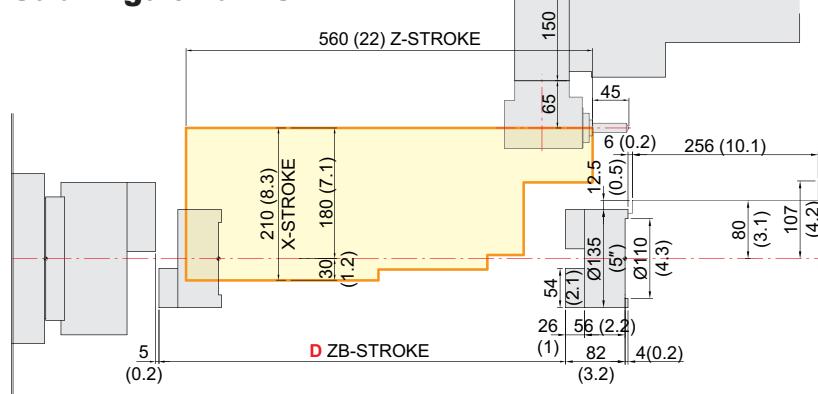

ITEM	A	B	C	D
SE2200LMSA	529 (20.8)	31 (1.2)	32.5 (1.3)	599.3 (23.6) [iTROL : 569.3 (22.4)]
SE2200LMS	508 (20)	52 (2)	39 (1.5)	560 (22) [iTROL : 530 (20.9)]
SE2200LMSC	499 (19.6)	61 (2.4)	43 (1.7)	547 (21.5) [iTROL : 517 (20.4)]

SPECIFICATIONS

Specifications

[] : Option

	ITEM	SE2200A	SE2200LA	SE2200MA	SE2200LMA	SE2200LMSA
CAPACITY	Max. Swing	mm(in)		Ø600 (Ø23.6")		
	Swing Over the Carriage	mm(in)		Ø390 (Ø15.4")		
	Max. Turning Dia.	mm(in)	Ø350 (Ø13.8")		Ø300 (Ø11.8")	
	Max. Turning Length	mm(in)	340 (13.4")	560 (22")	309 (12.2")	529 (20.8")
SPINDLE	Bar Capacity	Main	mm(in)		Ø51 (Ø2")	
		Sub	mm(in)	-		Ø32 (Ø1.3")
	Chuck Size	Main	inch		6"	
		Sub	inch	-		5"
	Spindle Bore	Main	mm(in)		Ø60 (Ø2.4")	
		Sub	mm(in)	-		Ø42 (Ø1.7")
	Spindle Speed (rpm)	Main	r/min		6,000	
		Sub	r/min	-		6,000
	Motor (Max./Cont.)	Main	kW(HP)		15/11 (20/15) [13.5/9 (18/12)]	
		Sub	kW(HP)	-		7.5/3.7 (10/5) [7.4/4.9 (93.9/6.6)]
	Torque (Max./Cont.)	Main	N·m(lbf·ft)		127/70 (93.7/51.6) [114.5/76.4 (84.5/56.3)]	
		Sub	N·m(lbf·ft)	-		63.6/23.6 (46.9/17.4) [47/31.1 (34.7/22.9)]
	Spindle Nose	Main	-		A2-5	
		Sub	mm(in)	-		FLAT TYPE
	Spindle Type	Main	-		BELT	
		Sub	-	-		BELT
C-axis Indexing		deg	-		0.001°	
FEED	Travel	X/Z	mm(in)	210/340 (8.3"/13.4")	210/560 (8.3"/22")	210/560 (8.3"/22")
		ZB	mm(in)		-	599.3 (23.6") [569.3 (22.4")]
	Rapid Traverse Rate	X/Z	m/min(ipm)		30/36 (1,181/1,417)	
		ZB	m/min(ipm)	-		15 (591)
Slide Type		-		ROLLER LM GUIDE		
TURRET	No. of Tools	ea		12"		12 [24]
	Tool Size	O.D/I.D	mm(in)	▫25/Ø40 (▫1"/Ø1 1/2")		▫20/Ø32 (▫3/4"/Ø1 1/4")
	Indexing Time	sec/step			0.15	
LIVE TOOL	Milling Tool Speed (rpm)	r/min		-		6,000
	Motor (Max./Cont.)	kW(HP)		-		3.85/2.59 (5.16/3.47) [Cont. : 2.8 (3.8)]
	Torque (Max./Cont.)	N·m(lbf·ft)		-		36.7/18.5 (27.1/13.6) [Cont. : 27 (19.9)]
	Collet Size	mm(in)		-		ER20 / Ø13 (Ø0.5")
	Type	-	-			BMT45
TAIL STOCK	Taper	-		MT#4		-
	Quill Dia.	mm(in)		Ø56 (Ø2.2")		-
	Travel	mm(in)	360 (14.2")	580 (22.8")	360 (14.2")	580 (22.8")
TANK CAPACITY	Coolant Tank	l(gal)	150 (39.6)	200 (52.8)	150 (39.6)	200 (52.8)
	Lubricating Tank	l(gal)			0.7 (0.18)	
POWER SUPPLY	Electric Power Supply	kVA		18		23
	Thickness of Power Cable	Sq		Over 16		
	Voltage	V/Hz		220V, 50/60Hz		
MACHINE	Floor Space (L×W)	mm(in)	2,120×1,610 (83.5"×63.4")	2,970×1,610 (116.9"×63.4")	2,150×1,610 (84.6"×63.4")	2,970×1,610 (116.9"×63.4")
	Height	mm(in)			1,700 (66.9")	
	Weight	kg(lb)	3,100 (6,834)	3,500 (7,716)	3,150 (6,945)	3,550 (7,826)
CNC	Controller	-		HYUNDAI WIA FANUC - SMART PLUS [HYUNDAI-iTROL]		

Specifications are subject to change without notice for improvement.

CONTROLLER

Specifications

[] : Option

ITEM		SE2200	SE2200L	SE2200M	SE2200LM	SE2200LMS	
CAPACITY	Max. Swing	mm(in)		$\varnothing 600$ ($\varnothing 23.6"$)			
	Swing Over the Carriage	mm(in)		$\varnothing 390$ ($\varnothing 15.4"$)			
	Max. Turning Dia.	mm(in)		$\varnothing 350$ ($\varnothing 13.8"$)		$\varnothing 300$ ($\varnothing 11.8"$)	
	Max. Turning Length	mm(in)		307 (12.1")	558 (22")	288 (11.3")	
	Bar Capacity	Main	mm(in)	$\varnothing 65$ ($\varnothing 2.6"$)			
SPINDLE	Chuck Size	Main	inch	8"			
		Sub	inch	-			
	Spindle Bore	Main	mm(in)	$\varnothing 75$ ($\varnothing 3"$)			
		Sub	mm(in)	-			
	Spindle Speed (rpm)	Main	r/min	4,500			
		Sub	r/min	-			
	Motor (Max./Cont.)	Main	kW(HP)	15/11 (20/15) [13.5/9 (18/12)]			
		Sub	kW(HP)	-			
	Torque (Max./Cont.)	Main	N·m(lbf·ft)	167/92 (123.2/67.9) [150.3/100 (110.9/73.8)]			
		Sub	N·m(lbf·ft)	-			
FEED	Spindle Nose	Main	-	A2-6			
		Sub	mm(in)	-			
	Spindle Type	Main	-	BELT			
		Sub	-	-			
	C-axis Indexing	deg	-	0.001°			
TURRET	Travel	X/Z	mm(in)	210/340 (8.3"/13.4")	210/560 (8.3"/22")	210/560 (8.3"/22")	
		ZB	mm(in)	-			
	Rapid Traverse Rate	X/Z	m/min(ipm)	30/36 (1,181/1,417)			
		ZB	m/min(ipm)	-			
LIVE TOOL	Slide Type	-		ROLLER LM GUIDE			
	No. of Tools	ea	12		12 [24]		
	Tool Size	O.D/I.D	mm(in)	$\square 25/\varnothing 40$ ($\square 1"/\varnothing 1 1/2"$)		$\square 20/\varnothing 32$ ($\square 3/4"/\varnothing 1 1/4"$)	
	Indexing Time	sec/step	0.15				
	Milling Tool Speed (rpm)	r/min	-		6,000		
TAIL STOCK	Motor (Max./Cont.)	kW(HP)	-		3.85/2.59 (5.16/3.47) [Cont. : 2.8 (3.8)]		
	Torque (Max./Cont.)	N·m(lbf·ft)	-		36.7/18.5 (27.1/13.6) [Cont. : 27 (19.9)]		
	Collet Size	mm(in)	-		ER20 / $\varnothing 13$ ($\varnothing 0.5"$)		
	Type	-	-		BMT45		
	Taper	-	MT#4				
COOLANT CAPACITY	Quill Dia.	mm(in)	$\varnothing 56$ ($\varnothing 2.2"$)				
	Travel	mm(in)	360 (14.2")	580 (22.8")	360 (14.2")	580 (22.8")	
	Coolant Tank	l(gal)	150 (39.6)	200 (52.8)	150 (39.6)	200 (52.8)	
POWER SUPPLY	Lubricating Tank	l(gal)	0.7 (0.18)				
	Electric Power Supply	kVA	18				
	Thickness of Power Cable	Sq	Over 16				
MACHINE	Voltage	V/Hz	220V, 50/60Hz				
	Floor Space (L×W)	mm(in)	2,190×1,610 (86.2"×63.4")	2,970×1,610 (116.9"×63.4")	2,220×1,610 (87.4"×63.4")	2,970×1,610 (116.9"×63.4")	
	Height	mm(in)	1,700 (66.9")				
	Weight	kg(lb)	3,200 (7,055)	3,600 (7,937)	3,250 (7,165)	3,650 (8,047)	
CNC	Controller	-	HYUNDAI WIA FANUC - SMART PLUS [HYUNDAI-iTROL]				

Specifications are subject to change without notice for improvement.

SPECIFICATIONS

Specifications

[] : Option

	ITEM	SE2200LC	SE2200LMC	SE2200LMS
CAPACITY	Max. Swing	mm(in)	Ø600 (Ø23.6")	
	Swing Over the Carriage	mm(in)	Ø390 (Ø15.4")	
	Max. Turning Dia.	mm(in)	Ø350 (Ø13.8")	Ø300 (Ø11.8")
	Max. Turning Length	mm(in)	549 (21.6")	499 (19.6")
Bar Capacity	Main	mm(in)	Ø81 (Ø3.2")	
	Sub	mm(in)	-	Ø32 (Ø1.3")
SPINDLE	Chuck Size	Main	inch	10"
		Sub	inch	-
	Spindle Bore	Main	mm(in)	Ø91 (Ø3.6")
		Sub	mm(in)	-
	Spindle Speed (rpm)	Main	r/min	3,500
		Sub	r/min	-
	Motor (Max./Cont.)	Main	kW(HP)	18.5/11 (25/15) [Power Up : 18.5/15 (25/20)] [13.5/9 (18/12)]
		Sub	kW(HP)	-
	Torque (Max./Cont.)	Main	N·m(lbf·ft)	269/120 (198.4/88.5) [Power Up : 269/164 (198.4/121)] [197.6/132 (145.7/97.4)]
		Sub	N·m(lbf·ft)	-
FEED	Spindle Nose	Main	-	A2-8
		Sub	mm(in)	-
	Spindle Type	Main	-	BELT
		Sub	-	-
C-axis Indexing		deg	-	0.001°
TURRET	Travel	X/Z	mm(in)	210/560 (8.3"/22")
		ZB	mm(in)	-
	Rapid Traverse Rate	X/Z	m/min(ipm)	30/36 (1,181/1,417)
		ZB	m/min(ipm)	-
Slide Type		-	ROLLER LM GUIDE	
TURRET	No. of Tools	ea	12	12 [24]
	Tool Size	O.D./I.D.	mm(in)	Ø25/Ø40 (Ø1"/Ø1 1/2")
	Indexing Time	sec/step	-	0.15
LIVE TOOL	Milling Tool Speed (rpm)	r/min	-	6,000
	Motor (Max./Cont.)	kW(HP)	-	3.85/2.59 (5.16/3.47) [Cont. : 2.8 (3.8)]
	Torque (Max./Cont.)	N·m(lbf·ft)	-	36.7/18.5 (27.1/13.6) [Cont. : 27 (19.9)]
	Collet Size	mm(in)	-	ER20 / Ø13 (Ø0.5")
	Type	-	-	BMT45
TAIL STOCK	Taper	-	MT#4	-
	Quill Dia.	mm(in)	Ø56 (Ø2.2")	-
	Travel	mm(in)	580 (22.8")	-
TANK CAPACITY	Coolant Tank	l(gal)	200 (52.8)	
	Lubricating Tank	l(gal)	0.7 (0.18)	
POWER SUPPLY	Electric Power Supply	kVA	18	23
	Thickness of Power Cable	Sq	Over 16	
	Voltage	V/Hz	220V, 50/60Hz	
MACHINE	Floor Space (L×W)	mm(in)	2,970×1,610 (116.9"×63.4")	
	Height	mm(in)	1,700 (66.9")	
	Weight	kg(lb)	3,700 (8,157)	3,750 (8,267)
CNC	Controller	-	HYUNDAI WIA FANUC i Series – Smart Plus [HYUNDAI-iTROL]	

Specifications are subject to change without notice for improvement.

CONTROLLER

HYUNDAI WIA FANUC i Series – Smart Plus

Controlled axis / Display / Accuracy Compensation		[] : Option
Control axes	2 axes (X, Z) / 3 axes (X, Z, C) / 4 axes (X, Y, Z, C)	
	5 axes (X, Z, B, C, A) / 6 axes (X, Z, Y, B, C, A)	
	7 axes (X1/Z1, X2/Z2, B2, C1/C2)	
Simultaneously controlled axes	2 axes [Max. 4 axes]	
Designation of spindle axes	3 axes [Max. 4 axes]	
Least setting Unit	X, Z, Y, B axes : 0.001 mm (0.0001 inch) C, A axes : 0.001 deg	
Least input increment	X, Z, Y, B axes : 0.001 mm (0.0001 inch) C, A axes : 0.001 deg	
Inch / Metric conversion	G20 / G21	
High response vector control		
Interlock	All axes / Each axis	
Machine lock	All axes	
Backlash compensation	± 0~9999 pulses (exc.Rapid traverse / Cutting feed)	
Position switch		
LCD / MDI	15 inch LCD unit (with Touch Panel)	
Feedback	Absolute motor feedback	
Stored stroke check 1	Over travel	
Stored stroke check 2, 3		
PMC axis control		
Operation		
Automatic operation (Memory)		
MDI operation		
DNC operation	Needed DNC software / CF card	
Program restart		
Wrong operation prevention		
Program check function	Dry run	
Single block		
Search function	Program Number / Sequence Number	
Interpolation functions		
Nano interpolation		
Positioning	G00	
Linear interpolation	G01	
Circular interpolation	G02, G03	
Exact stop mode	Single : G09, Continuous : G61	
Dwell	G04, 0 ~ 9999.9999 sec	
Skip	G31	
Reference position return	1st reference : G28, 2nd reference : G30 Ref. position check : G27	
Thread synchronous cutting	G33	
Thread cutting retract		
Variable lead thread cutting		
Multi / Continuous threading		
Feed function / Acc. & Dec. control		
Manual feed	Rapid traverse Jog : 0~2,000 mm/min (79 ipm) Manual handle : x1, x10, x100 pulses Reference position return	
Cutting Feed command	Direct input F code	
Feedrate override	0 ~ 200% (10% Unit)	
Rapid traverse override	1%, F25%, 50%, 100%	
Override cancel		
Feed per minute	G98	
Feed per revolution	G99	
Look-ahead block	1 block	
Program input		
Tape Code	EIA / ISO	
Optional block skip	9 ea	
Program stop / end	M00, M01 / M02, M30	
Maximum command unit	± 999,999.999 mm (± 99,999.999 inch)	
Plane selection	X-Y : G17 / Z-X : G18 / Y-Z : G19	
Workpiece coordinate system	G52, G53, 6 pairs (G54 ~ G59)	
Manual absolute	Fixed ON	
Programmable data input	G10	
Sub program call	10 folds nested	
Custom macro	#100 ~ #199, #500 ~ #999	
G code system	A, B/C	
Programmable mirror image	G51.1, G50.1	
G code preventing buffering	G4.1	
Direct drawing dimension program	Including Chamfering / Corner R	
Conversational Program	SmartGuide-i	
Program input		
	Multiple repetitive cycles I, II	
	Canned cycle for turning	
Auxiliary function / Spindle speed function		
Auxiliary function	M & 4 digit	
Level-up M Code	High speed / Multi / Bypass M code	
Spindle speed function	S & 5 digit, Binary output	
Spindle override	0% ~ 150% (10% Unit)	
Multi position spindle orientation	M19 (S##)	
Rigid tapping		
Constant surface speed control	G96, G97	
Tool function / Tool compensation		
Tool function	T & 2 digit + Offset 2 digit	
Tool life management		
Tool offset pairs	128 pairs	
Tool nose radius compensation	G40, G41, G42	
Geometry / Wear compensation		
Direct input of offset measured B		
Editing function		
Part program storage size	5,120m (2MB)	
No. of registerable programs	1,000 ea	
Program protect		
Background editing		
Extended part program editing	Copy, move and change of NC program	
Memory card program edit		
Data input / output & Interface		
I/O interface	CF card, USB memory Embedded Ethernet interface	
Screen hard copy		
External message		
External key input		
External workpiece number search		
Automatic data backup		
Setting, display and diagnosis		
Self-diagnosis function		
History display & Operation	Alarm & Operator message & Operation	
Run hour / Parts count display		
Maintenance information		
Actual cutting feedrate display		
Display of spindle speed / T code		
Graphic display		
Operating monitor screen	Spindle / Servo load etc.	
Power consumption monitoring	Spindle & Servo	
Spindle / Servo setting screen		
Multi language display	Support 24 languages	
Display language switching	Selection of 5 optional Languages	
LCD Screen Saver	Screen saver	
Unexpected disturbance torque	BST (Back spin torque limit)	
Function for machine type		
Cs contour control (C & A axes)	Mill, MS, Y, SY, LF-Mill, TTMS, TTSY	
Polar coordinate interpolation	Mill, MS, Y, SY, LF-Mill, TTMS, TTSY	
Cylindrical interpolation	Mill, MS, Y, SY, LF-Mill, TTMS, TTSY	
Polygon turning (2 Spindles)	Mill, MS, Y, SY, LF-Mill, TTMS, TTSY	
Canned cycle for drilling	Mill, MS, Y, SY, LF-Mill, TTMS, TTSY	
Spindle orientation expansion	MS, SY TTS, TTMS, TTSY	
Spindle synchronous control	MS, SY TTS, TTMS, TTSY	
Torque control	MS, SY TTS, TTMS, TTSY	
Y axis offset	Y, SY, TTSY	
Arbitrary angular control	Y, SY, TTSY	
Composite / Superimposed control	MS, SY, TTS, TTMS, TTSY	
Balance cutting	TTS, TTMS, TTSY	
Option		
Fast ethernet	Needed option board	
Data server	Needed option board	
Protection of data at 8 levels		
Tool offset pairs	200 pairs	
Helical interpolation		
Optional block skip	40 ea, 200 ea (AICC II)	

Figures in inch are converted from metric values.

The FANUC controller specifications are subject to change based on the policy of company CNC supplying.

CONTROLLER

HYUNDAI-iTROL (SIEMENS 828D)

Controlled axis / Display / Accuracy Compensation	
Control axes	2 axes (X, Z) - Std. 3 axes (X, Z, C) - Mill 4 axes (X, Z, Y, C) - Y 5 axes (X, Z, B, C, A) - MS 6 axes (X, Z, Y, B, C, A) - SY
Simultaneously controlled axes	Max. 4 axes
Least setting Unit	X, Z, Y, B axes : 0.001 mm (0.0001 inch) C, A axes : 1 deg [0.001] deg
Least input increment	X, Z, Y, B axes : 0.001 mm (0.0001 inch) C, A axes : 1 deg [0.001] deg
Inch / Metric changeover	G70 (inch) / G71 (metric)
Interlock	All axes / Each axis
Backlash compensation	
Pitch error compensation	Leadscrew pitch error compensation
LCD / MDI	15 inch color LCD (With Touch panel)
Keyboard	QWERTY full keyboard
Stored stroke check	Over travel
Operation	
Automatic operation	
MDI operation	
Program restart	
Program check function	Dry run / Program check / Machine lock
Single block	
Block search	Block search
Reposition	
Working area limit	Working area limitations
Interpolation functions	
Positioning	G00
Linear interpolation	G01
Circular interpolation	Circular interpolation CW (G02) Circular interpolation CCW (G03)
Exact position stop	Single block exact stop (G09) Exact stop G60 (G601, G602, G603)
Dwell	Dwell (G04)
Reference position return	Return to reference point Return to 2nd reference point
Helical interpolation	
Thread synchronous cutting	
Thread cutting retract	
Spline interpolation	Non-uniform rational B splines
Feed function / Acc. & Dec. control	
Manual feed	Rapid traverse Jog Manual handle Reference position return
Cutting Feed command	Direct input F code
Feedrate override	0 ~ 200% (10% Unit)
Rapid traverse override	1%, 25%, 50%, 100%
Feed per minute	G94
Feed per revolution	G95
Look-ahead block	1 block
Program input	
ISO support	G291(ISO)/G290 (SIEMENS) (ISO G Code system-A)
Optional block skip	2
Program stop / end	M00, M01 / M02, M30
Maximum command unit	± 999,999,999 mm, ± 99,999,999 inch
Plane selection	X-Y : G17, X-Z : G18, Y-Z : G19 G54 ~ G57, G505~G549
Workpiece coordinate system	G500 (Basic frame - setable zero offset) G53 (Work offset non modal) G153 (basic frame non modal)
Sub program call	11 folds nested
G code preventing buffering	STOPRE
Turning Cycle	Turning programing (Cycle 93,94,95,97)
User Cycle	

[] : Option ★ Needed technical consultation



Auxiliary function / Spindle speed function	
Auxiliary function	M Code 4 digit
Spindle speed function	S Code 5 digit
Spindle override	0% ~ 150% (10% Unit)
Spindle orientation	SPOS
Rigid tapping	
Automatic mode interchange	Spindle / Axis mode
Constant surface speed control	G96, G97
Spindle speed limitation	LIMS
Tool function / Tool compensation	
Tool function	Tool number & Tool name
Tool life management	Tool : T + Offset : D
Tools in tool list	128 ea : Std. 256 ea : Mill 768 ea : Y, MS, SY
Cutting Edges in tool list	256 ea : Std. 512 ea : Mill
Tool nose radius compensation	1,536 ea : Y, MS, SY
Geometry / Wear compensation	ISO (G40, G41, G42)
Measurement of tool length	
Tool management function	
Editing function	
Part program storage size	3MB – Std. 5MB – Mill 10MB – Y, MS, SY
No. of registerable programs	750 ea
External Storage devices	Local network, Server, USB, Flash drive
Background editing	
Extended part program editing	Copy, move and change of NC program
Memory card program edit	
Data input / output & Interface	
I/O interface	CF card interface (ONLY 10.4") USB memory interface Embedded Ethernet memory interface
Screenshot	
Setting, display and diagnosis	
Self-diagnosis function	
History display & Operation	Alarm & Operator message & Operation
Run hour / Parts count display	
Maintenance information	
Actual cutting feedrate display	
Display of spindle speed / T code	
Graphic display	
Operating monitor screen	Spindle / Servo load etc. Support 9 languages Chinese (Simplified/Traditional), English, French, German, Italian, Korean, Portuguese, Spanish
Multi language display	[★ Support 22 languages : Inquiry need] Screen saver & Motion sensing
LCD Screen Saver	
Function for machine type	
Cs contour control (C & A axes)	Mill, MS, Y, SY model
Polar coordinate interpolation	Mill, MS, Y, SY model
Cylindrical interpolation	Mill, MS, Y, SY model
Canned cycle for drilling	Mill, MS, Y, SY model
[Polygon turning (CP-Basic)]	Mill, MS, Y, SY model
[Hobbing / Skiving (CP-Comfort)]	Mill, MS, Y, SY model
Spindle synchronous control	MS, SY model
Servo tailstock function	MS, SY model
Option	
Additional optional block skip	10
Contour handwheel	
3D simulation	
Real time simulation	
Shop Turn	Machining step programming for turning

HW-MMS

HYUNDAI WIA Machine Monitoring System



A manufacturing machine self-developed by Hyundai Wia, HW-MMS is a unique software capable of monitoring the operation status of manufacturing machines in factories, a smart solution to improve manufacturing conditions of customers

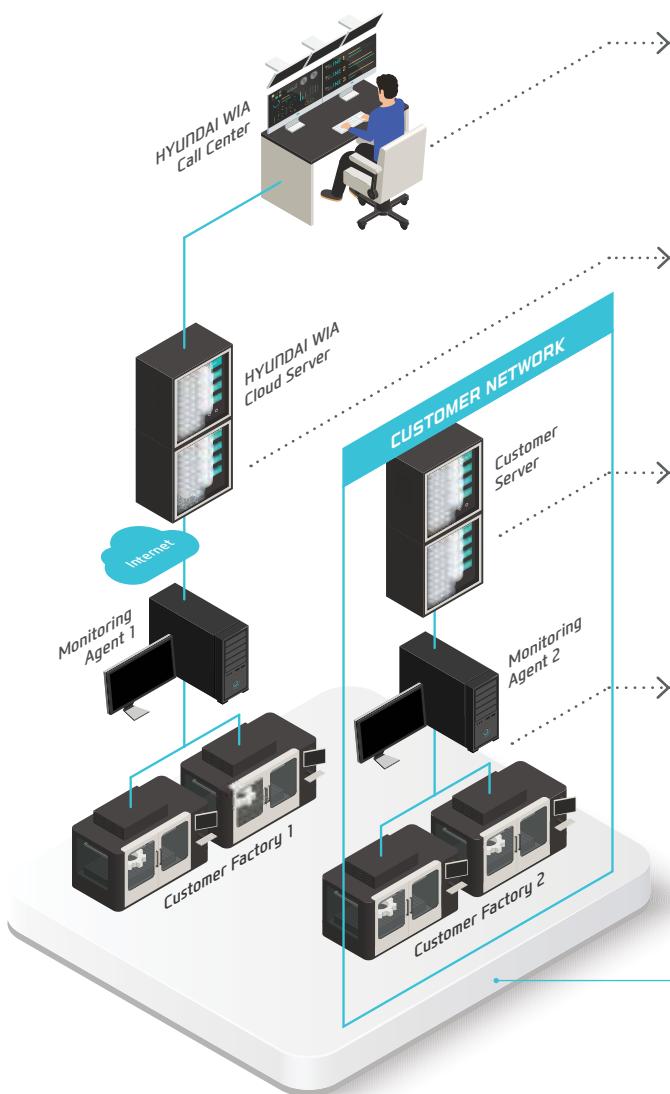

HW-MMS Remote

Hyundai Wia Call Center's remote diagnosis service provides a HMI/video diagnostic function.



HW-MMS Cloud

A cloud server-based equipment monitoring system for collecting and analyzing facility operation data.



HW-MMS Edge

A client server-based tool monitoring system for collection/analysis of facility operation data. (Compatible with client MES / ERP interface)



HW-MMS Edge Plus

This is a facility big data-based smart factory solution that collects and analyzes spindle/feed data, tool lifespan, NC processing files, etc. in real time

HYUNDAI WIA
Smart Factory Solution



EXPERIENCE THE NEW TECHNOLOGY

With its top-quality HYUNDAI WIA machine tool creates a new and better world.

You Tube HYUNDAI WIA MT
www.youtube.com/HYUNDAIWIAWT



<http://machine.hyundai-wia.com>
HYUNDAI WIA Machine Tools
Global Links

HEADQUARTER

Changwon Technical Center/R&D Center/Factory 153, Jeongdong-ro, Seongsan-gu, Changwon-si, Gyeongsangnam-do, Korea TEL : +82 55 280 9114 FAX : +82 55 282 9114

Overseas Sales Team /R&D Center 37, Cheoldobangmulgwan-ro,Uiwang-si, Gyeonggi-do, Korea TEL : +82 31 8090 2539

OVERSEAS OFFICES

HYUNDAI WIA Machine America corp. 450 Commerce Blvd, Carlstadt, NJ 07072, USA TEL : +1-201-987-7298

HYUNDAI WIA Europe GmbH Alexander-Fleming-Ring 57, 65428 Rüsselsheim Germany TEL : +49-0-6142-9256-0

HYUNDAI WIA Machine Tools China 2-3F, Bldg6, No.1535 Hongmei Road, Xuhui District, Shanghai, China TEL : +86-21-6427-9885

India Branch Office #4/169, 1st Floor, LOTTE BLDG, Rajiv Gandhi Salai, (OMR), Kandanchavadi, Chennai - 600096, Tamilnadu, India TEL : +91-76-0490-3348

Vietnam Branch Office Flat number 05, Service and Trade Center of Viet Huong Industrial Zone, Highway 13, Thuan Giao, Thuan An, Binh Duong, Vietnam TEL : +84-3-5399-5099