

**Serie | 2, Built-in Extractor Hood, 60 cm, Stainless steel
DHU635HZA**



The built-under cooker hood: save space by mounting the hood beneath your upper cabinet or on the wall.

- **Grease filtration level:** filters out over 85% of the grease from kitchen air
- **LED-Illumination:** The energy-saving lighting provides bright and clear lighting for the hob area.
- **Extraction rate:** at MAX_FOERDERLEISTUNG m³/h, it quickly ensures optimal kitchen air quality.
- **Metal grease filters:** filter grease and other solid particles out of the extracted air
- Pi shaped double metal filter

Technical data

Typology : Built-in/Built-under
 Approval certificates : Morocco
 Length electrical supply cord : 150 cm
 Net weight : 5.9 kg
 Type of control : mechanical
 Number of speed settings : 3
 Maximum output air extraction : 330 m³/h
 Maximum output recirculating air : 100 m³/h
 Number of lights : 2
 Noise level : 73 dB(A) re 1 pW
 Diameter of air outlet : 100 mm
 Grease filter material : Washable aluminium
 Odour filter : Yes
 Operating Mode : Convertible
 Total power of the lamps : 6 W
 Grease filter type : Kassette
 Connection Rating : 166 W
 Voltage : 220-240 V
 Frequency : 50; 60 Hz
 Plug type : Gardy plug w/ earthing
 Installation typology : Built-under
 Material body : Stainless steel
 Approval certificates : Morocco
 Plug type : Gardy plug w/ earthing
 Dimensions of the product, with chimney (if exists) (in) : / x x
 Dimensions of the packed product : 21.45 x 6.88 x 25.19
 Net weight : 13.000 lbs
 Gross weight : 20.000 lbs
 Motor location : Integrated motor in hood body
 No-return airflow flap : Yes
 Length electrical supply cord : 150 cm
 Dimensions of the product, with chimney (if exists) : x 600.0 x 510.0 mm
 Dimensions of the packed product (HxWxD) : 545 x 175 x 640 mm
 Net weight : 5.9 kg
 Gross weight : 8.9 kg




**Serie | 2, Built-in Extractor Hood, 60 cm,
Stainless steel
DHU635HZA**

**The built-under cooker hood: save space
by mounting the hood beneath your upper
cabinet or on the wall.**

- Suitable for ducted or re-circulated extraction
- 3 speed operation
- Single motor
- Ducted extraction rate according to DIN/EN 61591: max. 330 m³/h
- Adjustable glass visor
- Removable metal grease filters, dishwasher safe
- Power rating: 166 W
- 100 mm diameter pipe
- Light Intensity: 97 lux
- Colour Temperature: 2700 K
- Energy Efficiency Class: D*
- Average Energy Consumption: 103.3 kWh/year*
- Blower Efficiency Class: E*
- Lighting Efficiency Class: C*
- Grease Filtering Efficiency Class: B*
- Noise max. Normal Level: 73 dB*

**Serie | 2, Built-in Extractor Hood, 60 cm,
Stainless steel
DHU635HZA**

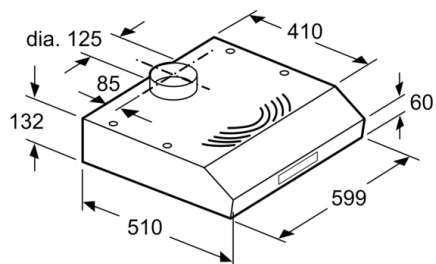

measurements in mm