

## Tillage Equipment



### Row-Crop Tillers

Making multiple passes to prepare hard ground for planting can waste both time and money. Do the job in only one pass with an efficient Row-Crop Tiller. From specialized cropland to construction sites, these rugged tools help you break through heavy residue and compacted ground with ease.

- "L" blade type
- Helical-shaped rollers
- PTO shaft with slip clutch
- Oil cooler standard on RC13 Series
- Optional hydraulic tailgate kit for RC13 Series
- Optional side disk available
- Hydraulic cage roller adjustment available on RC22 & RC13 Series
- Quick Hitch compatible

Model	Working Width	Engine HP	Hitch
RC2210	10 ft. 1 in. (3.1 m)	130 - 170 hp (96.9 - 126.8 kW)	Category 2 or 3N



### Field Cultivator

Prepare seedbeds, mix crop residue into soil, and blend soil to provide water and nutrients to crops with a versatile Field Cultivator.

- 13 S-tines with optional tillage points for tillage action
- John Deere Parts offers optional shovels, sold separately
- iMatch compatible

Model	Working Width	PTO HP	Hitch
PC1072	72 in. (182.9 cm)	18 - 45 hp (13.4 - 33.6 kW)	Category 1



How To Use A  
One-Row Cultivator

So that's  
how you  
do it.




### Rotary Tillers

Put the final touches on gardens or seedbeds before planting with a Rotary Tiller.

- Side gear drive and 6 tines per flange standard on RT30 series
- "C" and/or "L" shaped blades, depending on model
- Helical-shaped rotors
- All models offer skid shoes for depth control
- iMatch and/or Quick Hitch compatible

Model	Duty / Working Width	PTO HP	Hitch
RT3042	Standard / 42 in. (106.7 cm)	15 - 35 hp (11.2 - 26.0 kW)	Limited Category 1
RT3042R <sup>1</sup>	Standard / 42 in. (106.7 cm)	15 - 35 hp (11.2 - 26.0 kW)	Limited Category 1
RT3049	Standard / 49 in. (124.5 cm)	18 - 35 hp (13.4 - 26.0 kW)	Limited Category 1
RT3049R <sup>1</sup>	Standard / 49 in. (124.5 cm)	18 - 35 hp (13.4 - 26.0 kW)	Limited Category 1
RT3062	Standard / 62 in. (160 cm)	24 - 60 hp (17.9 - 44.6 kW)	Category 1
RT3062R <sup>1</sup>	Standard / 62 in. (160 cm)	24 - 60 hp (17.9 - 44.6 kW)	Category 1
RT3073	Standard / 73 in. (185.4 cm)	30 - 60 hp (22.4 - 44.6 kW)	Category 2
RT3073R <sup>1</sup>	Standard / 73 in. (185.4 cm)	30 - 60 hp (22.4 - 44.6 kW)	Category 2
RT1142	Standard / 42 in. (106.7 cm)	15 - 25 hp (11.2 - 18.6 kW)	Category 0 and 1
RT1149	Standard / 49 in. (124.5 cm)	17 - 25 hp (12.7 - 18.6 kW)	Category 1
RT1157	Standard / 57 in. (144.8 cm)	17 - 35 hp (12.7 - 26.0 kW)	Category 1
RT1165	Standard / 65 in. (165.1 cm)	19 - 35 hp (14.2 - 26.0 kW)	Category 1
RT1173	Standard / 73 in. (185.4 cm)	30 - 60 hp (22.4 - 44.7 kW)	Category 1
RT1181	Standard / 81 in. (205.7 cm)	35 - 60 hp (26.0 - 44.7 kW)	Category 1
RT1265	Medium / 65 in. (165.1 cm)	24 - 50 hp (17.9 - 37.3 kW)	Category 1 and 2
RT1273	Medium / 73 in. (185.4 cm)	35 - 75 hp (37.3 - 55.9 kW)	Category 2
RT2283	Medium / 83 in. (210.8 cm)	45 - 90 hp (33.6 - 67.1 kW)	Category 2
RT2293	Medium / 93 in. (236.2 cm)	50 - 90 hp (37.3 - 67.1 kW)	Category 2
RT2383	Heavy Duty / 83 in. (210.8 cm)	55 - 120 hp (41.0 - 89.5 kW)	Category 2
RT2308	Heavy Duty / 102 in. (259.1 cm)	75 - 120 hp (55.9 - 89.5 kW)	Category 2
RT2310	Heavy Duty / 121 in. (307.3 cm)	85 - 120 hp (63.4 - 89.5 kW)	Category 2

<sup>1</sup> Reverse Tiller

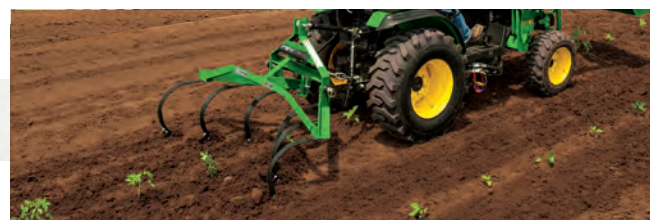

### One-Row Cultivator

Control weeds with the One-Row Cultivator. Adjustable row widths make this tool valuable for gardeners and small farm operators.

- Six cultivator tines with 1.75 in. x 10 in. (4.5 cm x 25.4 cm) long reversible curved points
- Tine spacing is adjustable

Model	Row Width	PTO HP	Hitch
PC1001	30 - 60 in. (76.2 - 152.4 cm)	18 - 45 hp (13.4 - 33.6 kW)	Category 1