



TK10K6

M / V Self-Tracking-SERIES

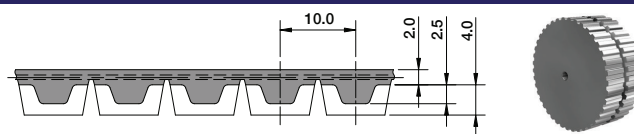


Open-Ended "M"

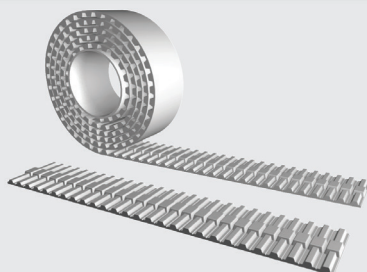

Specifications

Widths (mm) <small>In between widths available</small>	25	50
Lengths	Any lengths available - Stock rolls 50 meters	
Available Options	Nylon coating tooth side (PAZ), Nylon backing (PAR), Nylon both sides (PAZ-PAR)	
Tension Member Options	Steel standard Hi-flex steel VA301 Stainless steel VA316 Hi-flex Stainless steel Kevlar®	

Spliced and Welded "V"

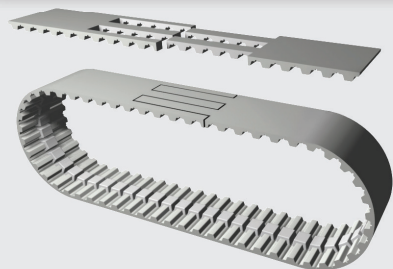

Specifications


Widths (mm) <small>In between widths available</small>	25	50
Min. Joined Length (mm) <small>Increasing in one tooth increments</small>	1,000	
Available Options	Nylon coating tooth side (PAZ), Nylon backing (PAR), Nylon both sides (PAZ-PAR)	
Tension Member Options	Steel standard Hi-flex steel VA301 Stainless steel VA316 Hi-flex Stainless steel Kevlar®	

Minimum Number of Pulley Teeth and Idler Diameter

Pitch (mm)	Min. # of Pulley Teeth (no back bending)	Min. # of Pulley Teeth (with back bending)	Min. Diameter of Flat Idler running on tooth side (mm)	Min. Diameter of Flat Idler running on belt back (mm)
TK10K6	25	25	60	80

Standard Material

TPUST1¹⁾



Ordering Example: Polyurethane Timing Belt

[WIDTH] [PITCH] / [LENGTH] [CONSTRUCTION]

50 TK10K6 / 5300 BFX