



T20 PRO

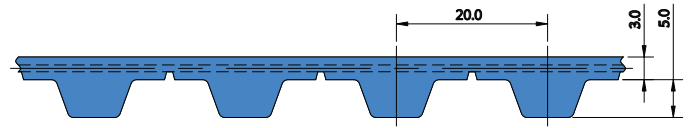


Open-Ended "M"

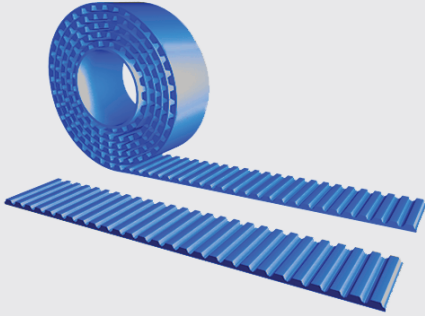

Specifications		
Widths (mm) In between widths available	25	50
Lengths	Any Lengths Available - Stock Rolls 50 Meters	
Material	FDA AU1 Polyurethane	
Belt Color	Blue	
Tension Members	High carbon steel cords (fully encapsulated with sealed edges at standard widths)	

Spliced and Welded "V"

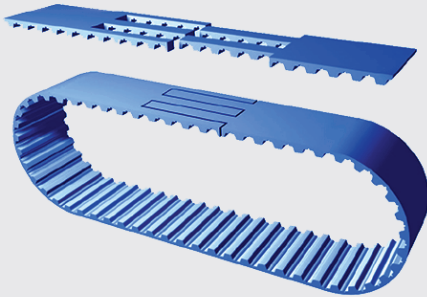

Specifications		
Widths (mm) In between widths available	25	50
Lengths	See Standard Lengths Below Available starting at a minimum length of 1,260mm. and can be ordered in one tooth increments from there.	
Material	FDA AU1 Polyurethane	
Belt Color	Blue	
Tension Members	High carbon steel cords (fully encapsulated with sealed edges at standard widths)	

T20 BRECOprotect®		Admissible Tensile Force of the belt F_{adm} /belt weight	
Belt Width	b(mm)	25	50
M	Steel Tension Member	$F_{Tadm}(N)$	3,500
	Specific Elasticity	$C_{spez}(N)$	$0.87 \cdot 10^6$
V	Steel Tension Member	$F_{Tadm}(N)$	1,750
Belt Weight (Standard)		(kg/m)	0.368

T20 BRECOprotect® Flexibility (minimum tooth count/minimum diameter)			
	Drive w/o back bending	Tension Member Construction	Steel Tension Member
		Z_{min} (# of teeth)	M
		d_{min} (mm)(Ø)	V
	Drive with back bending	Tension Member Construction	Steel Tension Member
		Z_{min} (# of teeth)	M
		d_{min} (mm)(Ø)	V

Ordering Example: BRECOprotect®

[WIDTH] [PITCH] / [LENGTH] [CONSTRUCTION]

50 T20 PRO / 1350 V