

# CRST-010100 Fire Extinguisher Cabinet, Recess Mounted, Powder Coated Steel



Shown with Oval model 10J-ABC fire extinguisher (sold separately).

**Application:** Recess mounted powder coated steel cabinet for use with Oval Model 10J-ABC low-profile fire extinguisher (sold separately).

Mounting: Cabinet is recess mounted in wall (mounting hardware not included). Cabinet fits into standard 3-5/8" (92mm) partition wall, making it ideal for both new construction and retrofit applications.

Accessibility: Cabinet projects 5/8" (16mm) from wall surface, complying with the maximum limit for protruding objects as required by the Americans with Disabilities Act, 2010 ADA Standards for Accessible Design, International Building Code and ANSI/ICC A117.1. Recessed cabinet maximizes clear space in pathways and means of egress.

**Cabinet:** Fully welded 16 gauge cold rolled steel with a white powder coated finish as standard. Additional colors available as option (see below).


Tub: 22 gauge tub with white powder coated finish.

**Door:** 16 gauge steel door with continuous steel piano hinge. Door has 1-1/4" (32mm) trim, (2) self-adjusting roller catches and black plastic recessed handle. Door opens 180 degrees. Cabinet is reversible so handle can be on either left or right side.

**Window/Lock:** Furnished with full acrylic window and no lock as standard. See below for additional window and lock options.

**Lettering:** Furnished without lettering as standard. See below for lettering options.

## **Ordering Information**

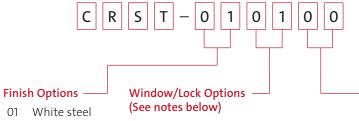

- 02 Black steel
- 03 Red steel
- 01 Full window
- OI Full Willuow
- 02 Full window with lock
- 03 Vertical half window
- 04 Vertical half window with lock
- 05 Solid door
- 06 Solid door with lock
- 07 Solid door with cylinder lock, less handle

## Lettering Options

- 00 Without lettering (standard)
- 01 Vertical decal, clear with red letters
- 02 Vertical decal, clear with white letters
- 03 Vertical decal, clear with black letters
- 04 Vertical die-cut, red letters
- 05 Vertical die-cut, white letters
- 06 Vertical die-cut, black letters
- 07 Vertical die-cut, red ascending letters
- 08 Vertical die-cut, white ascending letters
- 09 Vertical die-cut, black ascending letters


#### Notes:

- 1. Standard window is clear acrylic. For tempered glass window, add prefix "G" in place of "0" above.
- 2. Lock permits opening in case of fire by pulling firmly. Breaking glass to open is not required.

Oval Fire Products ovalfireproducts.com 13



# CRST-010100 Fire Extinguisher Cabinet, Recess Mounted, Powder Coated Steel

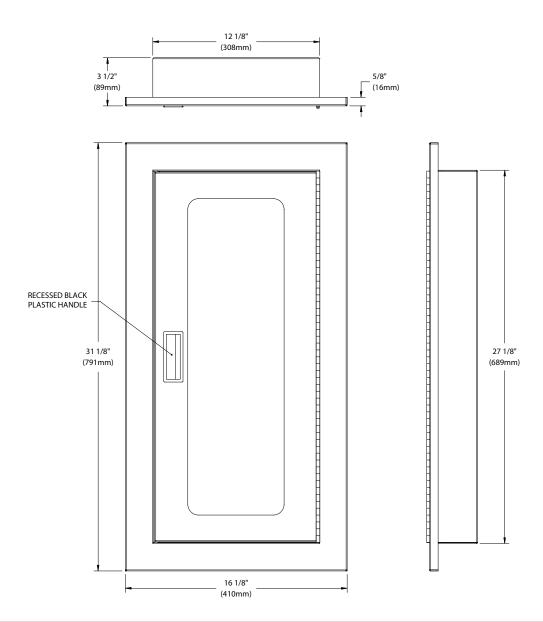

### **Recess Mount Cabinet Dimensions**

	Tub ID			Frame OD		Recommended Wall Opening		
Trim	Width	Height	Depth	Width	Height	Width	Height	Depth
5/8" (16mm)	12" (305mm)	27" (686mm)	3-1/4" (83mm)	16-1/8" (410mm)	, -	13" (330mm)	28" (711mm)	3-1/4" (83mm)

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are  $\pm$  1/4" (6mm). Rev. 111119

14 ovalfireproducts.com Oval Fire Products