
SPECIFICATIONS

MODEL	MATERIAL	SHEET SIZE	CHIP SIZE	BACKING
OTM10	CUMARU SAPWOOD	12" x 12"	³ / ₄ " X ³ / ₄ "	MESH
OTM11	CUMARU SAPWOOD	12" x 16"	3/4" WIDE	MESH
OTM12	CUMARU SAPWOOD	12" x 12"	2" x 2"	MESH
OTM13	CUMARU SAPWOOD	12" x 12"	VARIOUS	MESH
OTP27	GALVANIZED METAL	24" x 96"	11/2" WIDE	MDF
OTP28	NATURAL OAK	24" x 96"	4" WIDE	MDF
OTP29	NATURAL OAK	24" x 96"	11/2" WIDE	MDF
OTP30	NATURAL OAK	24" x 96"	3" x 3"	MDF

CUSTOM DESIGNS ARE AVAILABLE - PLEASE CONSULT YOUR REPRESENTATIVE

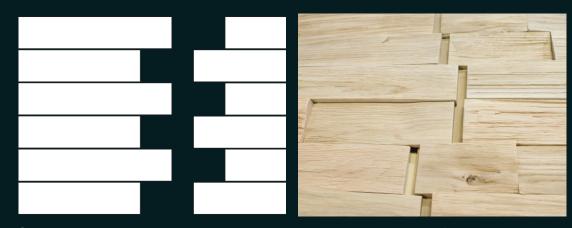

OctoTerra MDF backed panels have staggered ends so that sheets fit together invisibly.

Please view our website for new designs not contained in this brochure



OCTOPUS PRODUCTS LIMITED

TORONTO

23 Gurney Crescent
Toronto, Ontario M6B 1S9
Tel: 416-531-5051
Toll Free: 1-877-OCTOLAM
Fax: 416-531-3254
sales@octopusproducts.com

MONTREAL

3354 Le Corbusier Laval, QC. H7L 4S8 Tel: 514-861-5367 Sans Frais: 1-866-757-1010 Fax: 450-662-7171 montreal@octopusproducts.com

LOS ANGELES


Tel: 818-522-2048 info@octopusproducts.com

NEW YORK


Tel: 917-848-0805 infony@octopusproducts.com

www.octopusproducts.com







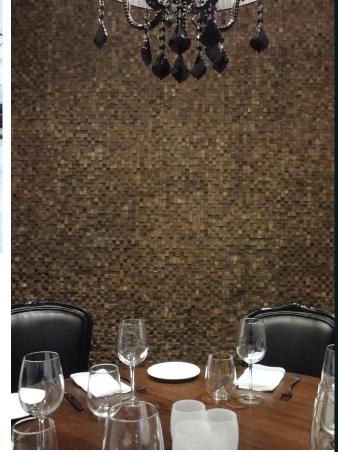

Ш



















OCTOTERRA FABRICATION GUIDE

exact matching from panel to panel.

will be installed for a minimum of 72 hours.

CONDITIONING

CUTTING

OctoTerra is a handmade decorative paneling product made from

Cumaru Sapwood, a native Chinese hardwood, oak and galvanized

metal. Due to the unique nature of this product, we cannot guarantee

Allow **OctoTerra** panels to condition in the environment where they

OctoTerra is supplied either with a mesh backing or on a MDF

substrate (see accompanying chart). Mesh backed panels can be cut with a sharp knife if the cut is in between individual pieces.

Otherwise both the mesh and MDF backed panels can be cut on a





table saw using an 80 tooth triple chip saw blade. Note that a strip of wood should be placed over the OctoTerra surface during cutting to hold the individual chips firmly in place.

adhesives onto drywall or a wood substrate. MDF backed panels can be applied to drywall or wood substrates using panel adhesives and screws or nails, or can be applied directly to studs or furring strips. Panels can also be wall hung using standard "Z" clip mounting systems.

FINISHING

OctoTerra OTM series designs are delivered with a factory applied finish. OTM series designs can be used outdoor, however, a protective finish needs to be applied to protect the wood. OctoTerra OTP27 is delivered with a protective finish so the metal will not change colour. OctoTerra OTP28/29/30 is made from natural oak, and must be finished. This series of designs can be stained.

LEED INFORMATION

OctoTerra panels can help contribute to LEED points in the following categories

MR4.1/4.2 Recycled Content

MR6 Rapidly Renewable Materials

Credit 4.1 Low Emitting Materials – Adhesives and Sealants

Credit 4.2 Low Emitting Materials – Composite Materials & Adhesives

Credit 5.1 Regional Materials – 20% Manufactured Regionally

