

## GLADIATOR II

Mobile work light

Our GLADIATOR II, which has won all key design awards, proves that function and design can be successfully combined into a single unit for portable work lights.

- Impact-resistant and break-proof 2-component compact housing
- High type of protection, optional up to IP 66
- Wide light beam and anti-glare illumination thanks to opal cover
- Avoiding hard or multiple shadows
- Optionally available with 3 sockets and switch
- Environmentally friendly and conserves resources thanks to replaceable components




# GLADIATOR II

## Features



Luminaire tested for use with limited surface temperature according to DIN EN 60598-2-24

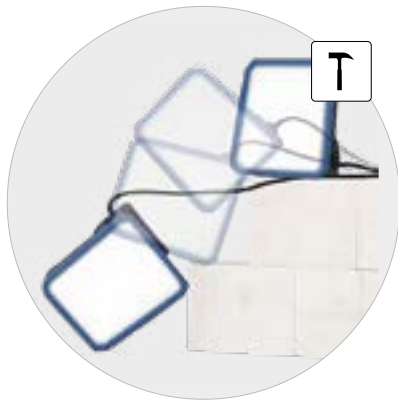


Impact-resistant and break-proof 2-component housing with edge protection of soft thermoplastic elastomer (TPE)

Anti-glare illumination thanks to opal cover



High degree of protection IP 66

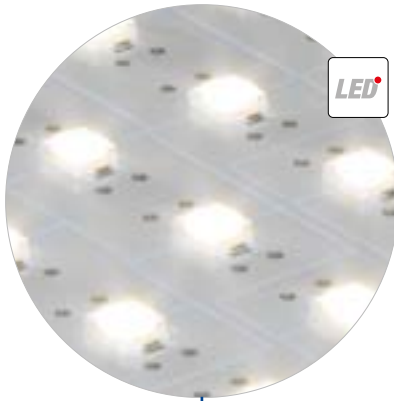

LED panel with high-efficiency-SMD-LEDs




Environmentally friendly and conserves resources thanks to replaceable components







Housing plastic anthracite/blue (polycarbonate, edge guard made of soft thermoplastic elastomer - TPE), cover plastic opal (polycarbonate), handle plastic black (ABS), 5 m power supply cable with mains plug.



L 320, B 305, H 110 mm



	$\Phi_v$						
230 V, 50-60 Hz							
88-0L000-0006	4.000 lm	-	-	II	IP 66	E+F	2,2 kg
88-0L300-0006	4.000 lm	3	✓	I	IP 54	F	2,8 kg
88-0L001-0006	4.000 lm	-	-	II	IP 66	E+F <sup>68</sup>	2,5 kg
88-0L0CH-0006	4.000 lm	-	-	II	IP 66	C	2,2 kg
88-0L3B0-0006	4.000 lm	3	✓	I	IP 54	E	2,8 kg
42 V, 50-60 Hz							
88-6L060-0006	3.400 lm	-	-	III	IP 66	CEE	2,5 kg
88-6L160-0006	3.400 lm	1	✓	III	IP 44	CEE	2,6 kg
24 V, 50-60 Hz							
88-5L050-0006	3.400 lm	-	-	III	IP 66	CEE	2,5 kg
88-5L150-0006	3.400 lm	1	✓	III	IP 44	CEE	2,6 kg
12 V / 0 Hz							
88-4L040-0006	2.600 lm	-	✓	III	IP 65	Car	2,3 kg

- $\Phi_v$  ..... 4.000 lm effective
- ..... 5.000 K, R<sub>a</sub> ≥ 80 LED panel
- P ..... 40 W
- ..... 5 m, H07RN-F black
- T ..... IK08

