






IP 65 IK07    ≤ 3.600 lm

SPARTACUS

Mobile dome luminaire

The pendant mounted SPARTACUS dome luminaire which can be used to create a chain of light is ideally suited for providing light for construction sites, industrial plants, shipyards or the like.

- Quick mounting by integrated hook
- Impact-resistant and break-proof 2-component compact housing
- Optional up to 2 socket outlets
- Can be used as stand-up or pendant luminaire
- High degree of protection up to IP 65
- Environmentally friendly and conserves resources thanks to replaceable components



SPARTACUS


Features



Folding hook made of stainless steel with locking device



Impact-resistant and break-proof 2-component housing with edge protection of soft thermoplastic elastomer (TPE)

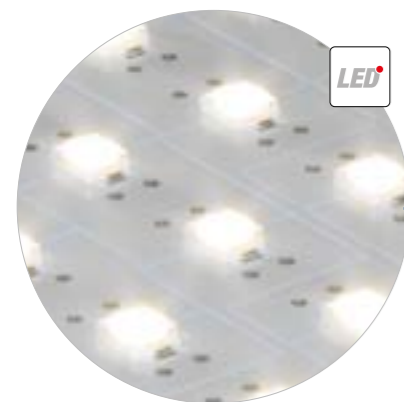

LED panel with high efficiency SMD-LEDs

High degree of protection IP 65



Glare-reduced light thanks to opal cover lens made of impact-resistant and non-yellowing polycarbonate



Pressure compensating valve against the formation of condensation water in the luminaire




Luminaire tested for use with limited surface temperature according to DIN EN 60598-2-24

Environmentally friendly and conserves resources thanks to replaceable components



Without, with 1 or 2 Sockets available

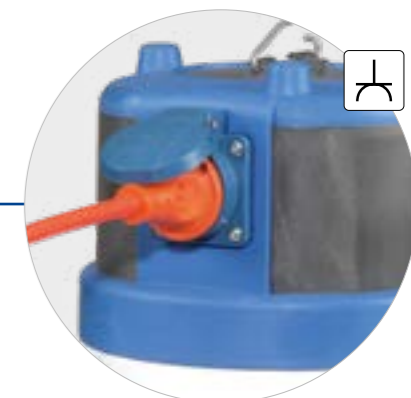


Different connector systems and longer power supply cable on request
Wide range of accessories







Housing plastic (polycarbonate, edge guard made of soft thermoplastic elastomer TPE), cover plastic opal (polycarbonate), retractable stainless steel mounting hook with safeguard, second cable entry optional (through-wiring option), 5 m power supply cable with mains plug.



- 3.600 lm effective
- 4.200 lm
5.000 K, Ra ≥ 80
LED panel
- 28 W
- 5 m, H07RN-F black
- IK07

230 V, 50-60 Hz						
77-01000-0006	-	II	IP 65	E+F	1,5 kg	
77-01100-0006	1	I	IP 54	F	1,9 kg	
77-01200-0006	2	I	IP 54	F	2,0 kg	
77-010CH-0006	-	II	IP 65	C	1,5 kg	
77-011B0-0006	1	I	IP 54	E	1,9 kg	
77-012B0-0006	2	I	IP 54	E	2,0 kg	
110 V, 0/50-60 Hz						
77-71070-0006	-	I	IP 65	CEE	1,8 kg	
77-71170-0006	1	I	IP 44	CEE	1,9 kg	
77-71270-0006	2	I	IP 44	CEE	2,0 kg	
42 V, 50-60 Hz						
77-61060-0006	-	III	IP 65	CEE	1,8 kg	
77-61160-0006	1	III	IP 44	CEE	1,9 kg	
77-61260-0006	2	III	IP 44	CEE	2,0 kg	
24 V, 50-60 Hz						
77-51050-0006	-	III	IP 65	CEE	1,8 kg	
77-51150-0006	1	III	IP 44	CEE	1,9 kg	
77-51250-0006	2	III	IP 44	CEE	2,0 kg	

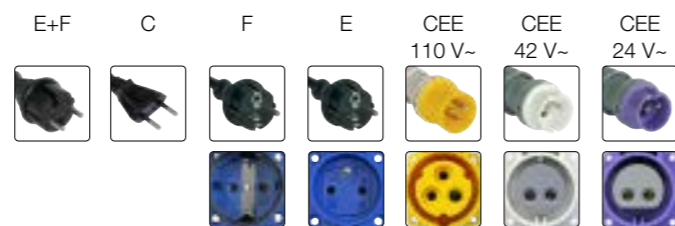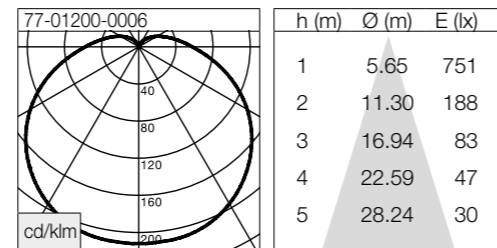

Handle

For carrying or mounting on accessories



95-0080-0001 0,28 kg

Handle with cable reel

For carrying or mounting on accessories



95-0081-0001 0,41 kg

Magnetic holder

Adapter plate with 3 rubberized magnets for easy attachment to metallic surfaces; steel, powder-coated, anthracite metallic



95-0205-0022 0,46 kg

