



TorchLED torch light battery or accu operated



Technical data lamp

Power supply: 4 pcs AA 1.5V batteries or
4 pcs AA 1.5V accu cells

Luminous flux: 185lm (2 LED white full light)

Protection category: IP54

Light source: LED

Equipment: 2×white/2×red/2×green

Housing: – PA6-housing, with rubber overmolded
handle lots (non-slip)
– freestanding
– Belt clip (chrome steel)
– mechanical resistant

Temperature range: –20° C to +45° C

Dimension (L×W×H): 68×115.5×35mm

Weight: approx. 115g without cells

Technical data charging station

Operating voltage 100-240VAC/12-48VDC

Power supply: 700mA charging current

Protection class: IP44

Housing: – ABS
– Wall or table mounting possible
– Lamp retaining clip
– spring steel, gold plated

Contacts: at 1'900mAh cells max. 4h

Charging time: 0° C to +40° C

Temperature range: 0° C to +40° C


Dimension (L×W×H):
– Charging station: 86.6×79.6×44 mm
– 5-fold charging station: 500×220×125 mm

Control element



A ON/OFF
Tap: ON/OFF with memory function

B Choice of function
Broad light
Focused light
Full light
Red light
Red flashing light
Green light
Press: dim

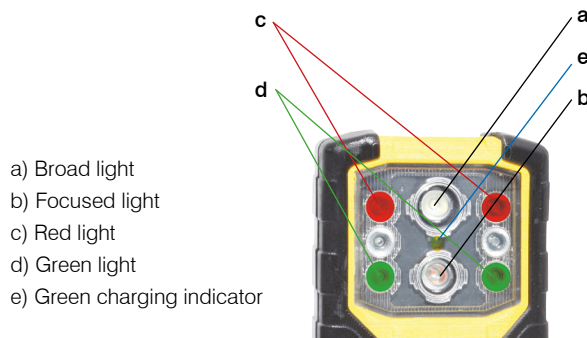

a) Broad light
b) Focused light
c) Red light
d) Green light
e) Green charging indicator

Light mode with 1'900mAh batteries/accus

Main functions	Functions	Operating time	
		Battery	Accu
1 power LED white	- Bright light 100%	approx. 6h	approx. 6h
	- Bright light dimmed	> 80h	> 80h
	- Broad light 100%	approx. 6h	approx. 6h
Signal lights with 2 LED	- Broad light dimmed	> 80h	> 80h
	- Permanent	> 40h	> 30h
	- Dimmed	> 80h	> 60h

Our assortment

860237* TorchLED torch light, yellow, incl. hand strap

860240* TorchLED torch light, yellow, incl. hand strap and magnetic strip

Accessories/spare parts

860276 TorchLED charging station, 100-240VAC, incl. 1.5m cable with plug-in transformer

133537 TorchLED charging station, 12-48VDC, incl. 1.5m cable with cigarette plug

860471 TorchLED charging station, 12-48VDC, incl. 1.5m cable without plugs and sockets

130407 TorchLED wall charging station 5-fold, 100-240VAC/700mA, max. 15VDC, incl. 3m main supply 3×1.0mm² black T12

860274 Accu-NiMH 1.2V/1900mAh HR6-AA

860275 Alkaline battery 1.5V/LR6-AA

128785 Wall bracket – empty

860335 TorchLED belt pouch 72×127×35mm

*For a TorchLED art. 860274 or 860275 is 4×needed.