



Color: Moss Green
Installer: Dowling Brothers Roofing

NRM-9000 PANELS • Corrugated

NRM-9000 panels are ideal for walls, mansards, roofs, fences and equipment screens. The 9000 panel can be specified in a wide variety of materials to fit any design need. This product is factory roll-formed in maximum length of 45' 0" and minimum length of 4' 0".

NRM-9000 features a $\frac{7}{8}$ " tall rib height with a net roof coverage of 28" and a net wall coverage of 32".

FASTENERS

For roofing applications, use wood-type screws fastened on 24" centers. Other screw types are available applications over structural steel and steel decking.

TRIM

All flashing and trim shall be fabricated by Nu-Ray Metals or a qualified fabricator. Flashings for this panel shall be 26, 24 or 22 gauge steel.

INSTALLATION

For roofing applications, NRM-9000 panels shall be installed over solid decking ($\frac{5}{8}$ " plywood, nailboard insulation or equivalent) with an underlayment of 30# roofing felt applied horizontally from eave to ridge. Panels shall be fastened on 24" centers for standard 26 gauge application. Minimum roof pitch is 3:12.

HANDLING

Vinyl masking is provided on all steel sheet to help protect materials where extra handling is expected.

WARRANTY

A 40-year non-prorated finish warranty can be supplied covering finish performance.



Nu-Ray Metal Products, Inc. 1234 37th Street NW Auburn, WA 98001
Tel. (800) 700-7228 Fax (253) 833-7268 Web NuRayMetals.com

NRM-9000 Corrugated Panel



NRM-9000 FEATURES

- Superb panel for architectural, commercial and industrial roof, wall, soffit and mansard applications
- Factory-injected seam sealant available as an option
- Great load and span capacities
- Apply over solid substrates or open framing
- On site forming available
- Minimum 3:12 roof pitch

PANEL DEPTH : 7/8"

PANEL WIDTHS : 32" wall and 28" roof

PANEL LENGTHS: 5' 0" to 44' 0" standard

METAL OPTIONS

- 24 and 26 gauge G90 or AZ50 steel
- .032 and .040 aluminum (special order)
- 16 oz. or 20 oz. natural copper (special order)

SURFACE OPTIONS

- Standard
- Perforated (extended lead time applies)
- Embossed (extended lead time applies)


FINISHES

- D2 Kynar 500® ULTRA-Cool™
- D2 Kynar 500® with Ocean Guard ULTRA-Cool™
- Zinalume Plus*
- Vintage

Kynar® and Kynar 500® are registered trademarks of Arkema Inc. used under sublicense by Nu-Ray Metal Products, Inc.


STITCH FASTENER (@ 1'-8" O.C.) NOTE: PRE-DRILL EXTERIOR SIDE OF SHEET FOR STITCH FASTENER BEFORE ERECTION

FASTENER LOCATIONS - WALL:

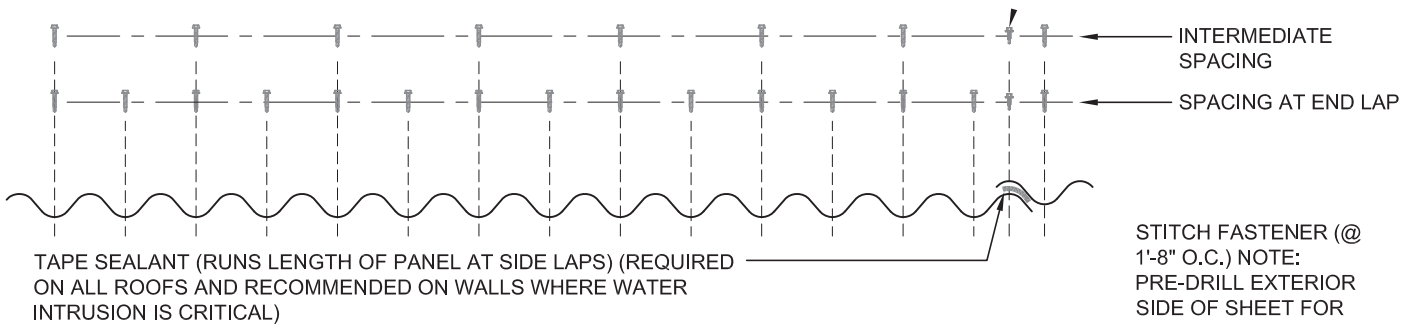

STITCH FASTENER (@ 1'-8" O.C.) NOTE: PRE-DRILL EXTERIOR SIDE OF SHEET FOR STITCH FASTENER BEFORE ERECTION

FASTENER LOCATIONS - ROOF:

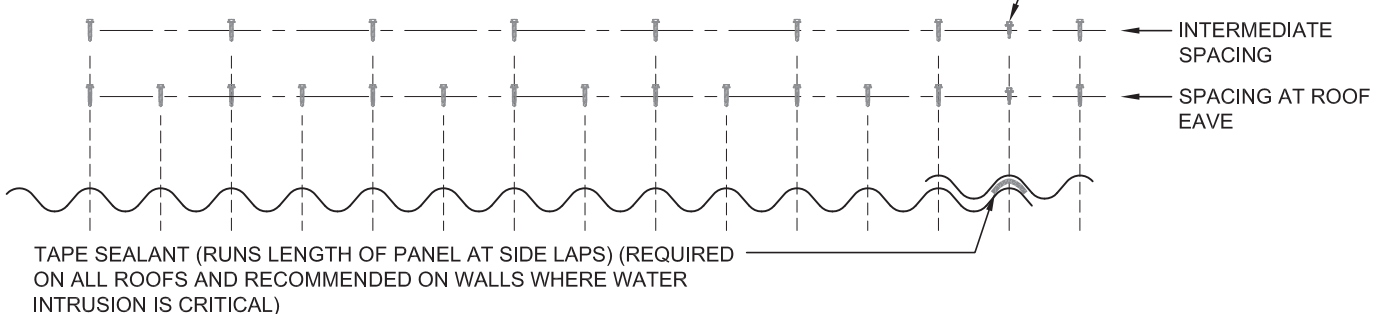

(800) 700-7228

www.NuRayMetals.com

Questions? Contact our Technical Department at
info@nuraymetals.com