




**WORLDWIDE**  
TIMBER TRADERS

Shadowline Cladding:  
**STANDARD PROFILE**

**STANDARD SHADOWLINE PROFILE:**

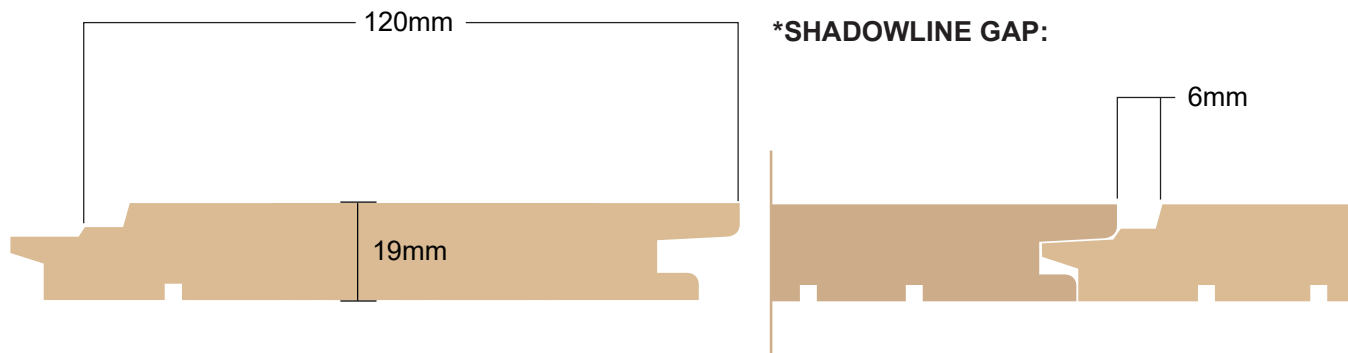

**MACHINING GUIDE:**

Feed Stock	Ex	50x25	75x25	100x25	125x25	150x25	175x25	200x25
Machine Clean Up		14mm (except 50 & 75mm = 10mm)						
<b>Overall Width</b>	(a)			86		136		
Tongue (a less b)		16mm remains constant						
<b>Cover Width</b>	(b)			70		120		
<b>LM per M<sup>2</sup></b>				14.286		8.334		

Thickness	(c)	Top Layer		Tongue	Bottom Layer
		19mm	6.7mm	6.3mm	6.0mm
<b>Channel Width at Base</b>	(d)				
		The "channel" width doesn't effect the "cover" width, the "cover" width is measured from the "channel" step to the board edge.			

**DESCRIPTION:**

This is our standard timber profile in Worldwide Timber Traders' Shadowline range.

\*Please note that additional timber thicknesses and profile may be available. For more information please contact Worldwide Timber Traders with the details below.

08 9418 3222  
info@wwtt.com.au  
wwtt.com.au



**WORLDWIDE**  
TIMBER TRADERS

Address:  
179 Barrington Street  
Bibra Lake WA 6365