




Modern and precisely engineered, ray.lux is the ideal affordable solution for any project.

The blend of optimal functionality with easy installation makes it suitable for both new build and refurb projects.


Featuring high performance materials with exceptional functionality – create light and welcoming spaces with this highly adaptable, affordable and aesthetically pleasing rooflight.

Sleek and stylish, the frame of the ray.lux unit is available from stock in the current colour of choice – anthracite grey, or white. You can be assured that comfort and safety go hand in hand with superior non-fragility ratings and excellent thermal properties.

With 252 different configurations, you can be confident that you will find a suitable specification for your new build or refurbishment project. The fixed, manual or electric ventilation options will ensure a comfortable environment whenever ray.lux glass is installed.

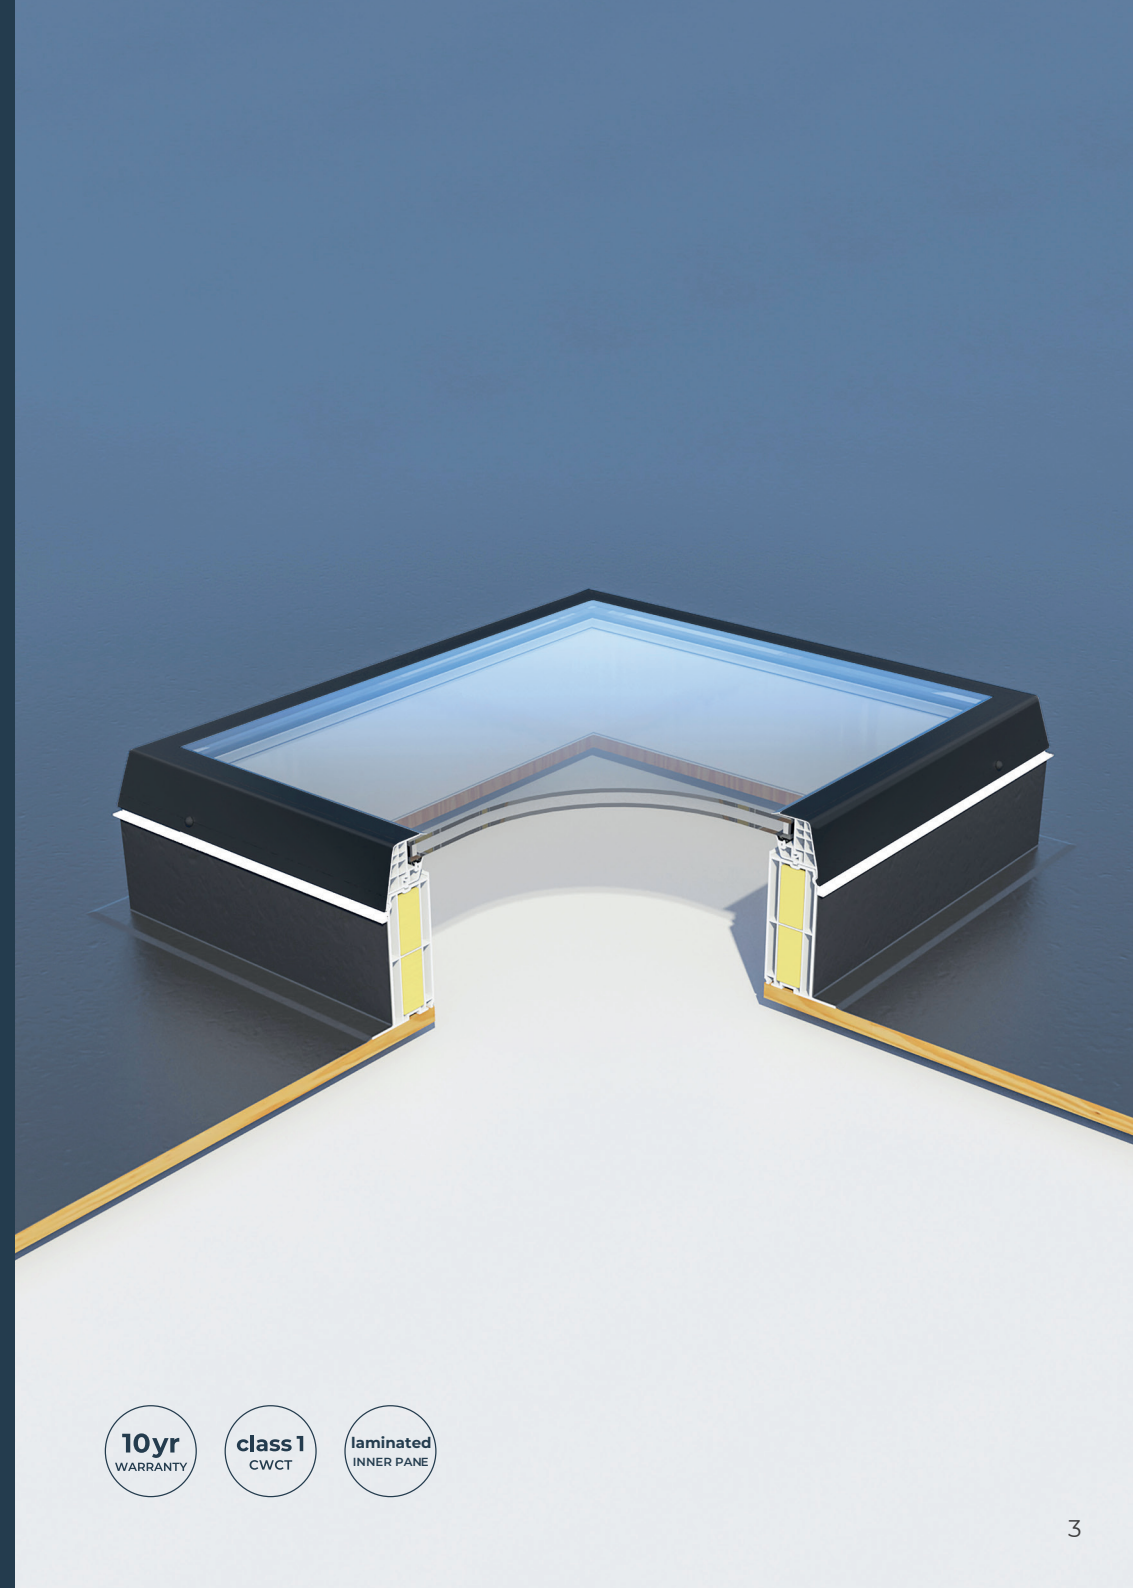

Colours & Glazing

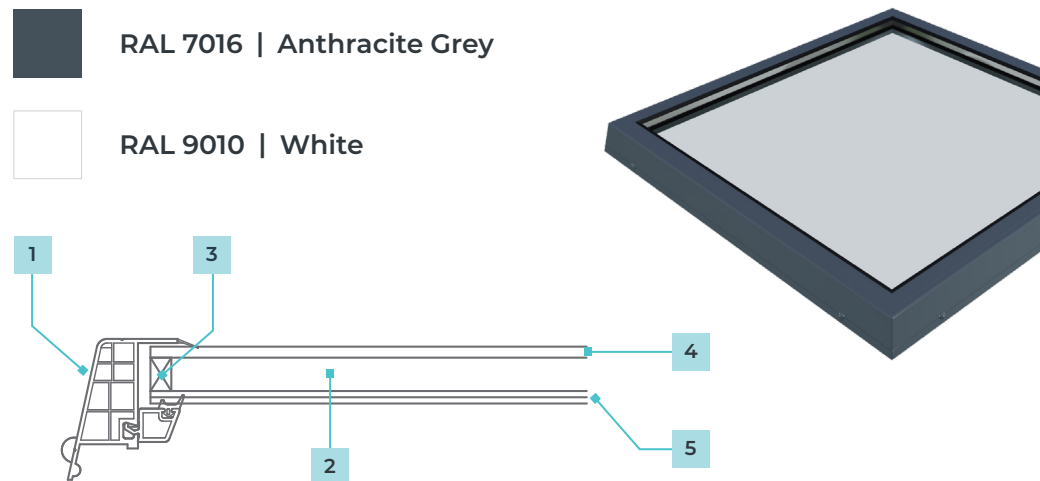


1	Frame	PVC
2	Gas	Argon
3	Warm spacer	✓
4	Toughened outer pane	✓
5	Laminated inner pane	✓
Install pitch (upstand)		5–15°
External frame colour		RAL 7016 Anthracite Grey RAL 9010 White
Ud-value *		1.26 W/m²K
Non-fragility		CWCT Class 1

* complete glass unit tested vertically


- Thermally broken upstands, incorporating fixing flange
- Installation options available to suit either a site-formed builder's upstand, or proprietary insulated upstands with vertical sides
- Proprietary upstands are 150mm high, meeting the minimum requirements for building regulations

Sizes & Upstands

Builder's Upstand:

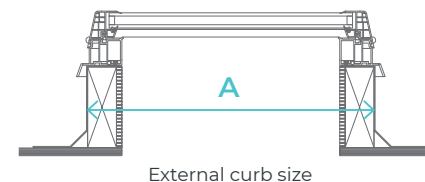

uPVC 150mm Upstand:

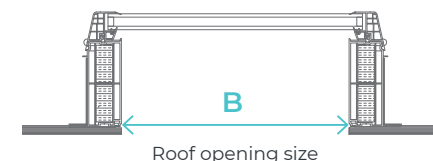

	Size ref	To suit external curb size (mm) (A)
Square	RX S2	600 x 600
	RX S4	700 x 700
	RX S5	800 x 800
	RX S7	900 x 900
	RX S8	1000 x 1000
	RX S9	1100 x 1100
	RX S11 !	1300 x 1300
Rectangular	RX R5	700 x 1000
	RX R6	700 x 1300
	RX R7	800 x 1100
	RX R16	1000 x 1300
	RX R17a !	1100 x 1600
	RX R19 !	1100 x 2100
	RX R23c !	1300 x 2300

	Size ref	To suit roof opening size (mm) (B)
Square	RX S2	500 x 500
	RX S4	600 x 600
	RX S5	700 x 700
	RX S7	800 x 800
	RX S8	900 x 900
	RX S9	1000 x 1000
	RX S11 !	1200 x 1200
Rectangular	RX R5	600 x 900
	RX R6	600 x 1200
	RX R7	700 x 1000
	RX R16	900 x 1200
	RX R17a !	1000 x 1500
	RX R19 !	1000 x 2000
	RX R23c !	1200 x 2200




Due to their size and/or weight, any products marked ! will require offloading by a mechanical means, i.e. a forklift. Please note the driver cannot offload these goods by hand. Vehicle mounted offloading facilities (HIAB) is available by prior arrangement at extra cost. Please call us should this be required. For special order items, this applies to any product above 1.5 square metres.

Ventilation

- Available as standard fixed unit
- Electrically opening units operated by 230V slimline chain actuator, powder coated to match colour of internal framework
- Manually opening units incorporate winding spindle opening to approximately 200mm

Voltage (V)	230
Power Requirements (Amps)	0.32
Stroke Length (mm)	200
Cable Requirements	3 Core


Fixed:

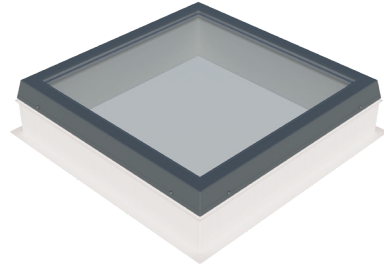

Electric:



Manual:

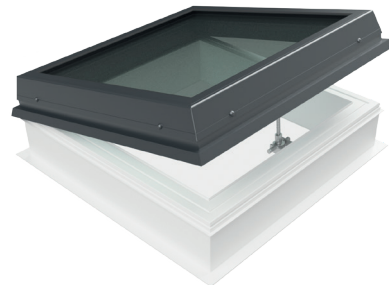

Manually opening units are ideal for use in refurbishment projects where getting power to the unit is not practical.

Accessories

Standard Comfort Controls:

- Electric opening switch supplied with retractive switch as standard
- Option of standard comfort kit including a control panel, remote control and rain sensor



Premium Comfort Controls:

- For electric opening
- Wireless controls which include open/close manual switch and internal and external temperature
- Wireless weather station which includes wind and rain sensor
- Option of handheld remote



2022

experience.brighter

Delivering on our promises, that is our focus – and it is what makes us the no.1 choice for professionals.

Nationwide coverage and next-day delivery: Our delivery depot holds large volumes of stock, allowing us to supply orders at short notice – including next-day delivery if ordered by 2pm, in most cases.



whitesales

Europa House, Alfold Road,
Cranleigh, GU6 8NQ
Tel: 01483 917580 | Fax: 01483 271771
sales@whitesales.co.uk | whitesales.co.uk

Opening Times: 07:30–16:30

