

## DESCRIPTION

- Traditional refractor wallpack with more modern housing design
- Die-cast aluminum housing with prismatic polycarbonate lens
- Chip and fade resistant powder coat finish with stainless steel hardware
- Reliability tested LED chips and driver assure long life
- 0-10V Dimming in PRWX50 and PRWX80 models
- Integral button-type photocell in PRWX50 and PRWX80
- Easily mounts to standard 4" J-box
- ETL Listed for Wet Locations
- DLC 5.1 qualified models  
(Consult DLC QPL for specific models)




**PRWX28**

**PRWX50**

**PRWX80**

## SPECS AT A GLANCE

Model	PRWX28	PRWX50	PRWX80
Nominal Wattage	28W	50W	80W
CCT (K)	4000K		
Lumens (LM)	3593	7642	12790
Efficacy (LPW)	128	153	160
CRI	>70		
Input Voltage	120-277V		
Operating Temp.	-30°C to +40°C (-22°F to +104°F)		
Certifications	DLC, ETL		

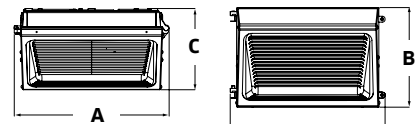

	PRWX28	PRWX50	PRWX80
A	9.4" (240 mm)	11.4" (290 mm)	13.1" (332 mm)
B	6.1" (155 mm)	7.9" (202 mm)	16.6" (156 mm)
C	4.3" (109 mm)	5.4" (138 mm)	9.2" (235 mm)
Weight	3.5 LBS	5.6 LBS	8.1 LBS

## ORDERING INFORMATION

Catalog Number	Description
<b>PRWX28-H-4K-BZ</b>	Wallpack, 28W LED, 4000K, 3593lm, 120-277V, 128 LPW, 70 CRI, Bronze
<b>PRWX50-H-PC-4K-BZ</b>	Wallpack, 50W LED, 4000K, 7642lm, 120-277V, 153 LPW, 70 CRI, Photocell, Bronze
<b>PRWX50-H-PC-4K-WH</b>	Wallpack, 50W LED, 4000K, 7642lm, 120-277V, 153 LPW, 70 CRI, Photocell, White
<b>PRWX80-H-PC-4K-BZ</b>	Wallpack, 80W LED, 4000K, 12790lm, 120-277V, 160 LPW, 70 CRI, Photocell, Bronze