



## PERFORMANCE FEATURES

### UL Listing

Suitable for wet locations

### LEDs:

Lumileds 2835, high CRI.

### Housing

Diecast Aluminum housing

### Diffuser

Polycarbonate

### Optional Accessories

- 20kva Surge-protective device (4kV)
- Photocell

### Finish

Long lasting dark bronze finish with high durability

### Ambient Operating Temp.

-30°C (-22°F) to 50°C (122°F)

### Dimming Driver:

Dimming: 0-10V dimming standard

### Flicker Percent

<80%

### Application

Landscape lighting, building facade or perimeter lighting, garage or loading bay

### IESNA LM-79 & IESNA LM-80 Testing:

LED luminaires have been tested based on IESNA LM-79 and LM-80 by a third-party laboratory


## SKU GUIDE

Model Section		FLLS-150W-50K-DV2-PC-CL-BZFM							
FLLS		150W	40K	DV2		PC	CL	BZ	
BODY TYPE PREFIX	MODEL NAME	WATTAGE	CCT (if selectable = CCT)	DRIVER	VOLTAGE	CONTROLS	ELECTRICAL OPTIC/LENS	HOUSING FINISH	MOUNTING
FLL	S - Slim	15W 25W 35W 60W 80W 100W 150W	40K=4000K 50K= 5000K	D - 0-10V Dimming	V2 - 120-277V (Universal Voltage)	PC- Photocell Sensor	CL-Clear Lens	BZ-Dark Bronze Finish	KM - Knuckle Mount FM - Flush Mount

## SKU SPECIFICATION

SKU #	Nominal Wattage	CCT	Lumens	Efficacy (LPW)	CRI	Input Voltage	Operating Temp.	Certifications
FLLS-15W-50K-DV2-PC-CL-BZKM	15W	5000K	2109	141	>80	120-277V	-30°C (-22°F) to 50°C (122°F)	UL listed DLC Certified
FLLS-15W-40K-DV2-PC-CL-BZKM	15W	4000K	2085	139	>80	120-277V	-30°C (-22°F) to 50°C (122°F)	UL listed DLC Certified
FLLS-25W-50K-DV2-PC-CL-BZKM	25W	5000K	3150	126	>80	120-277V	-30°C (-22°F) to 50°C (122°F)	UL listed DLC Certified
FLLS-25W-40K-DV2-PC-CL-BZKM	25W	4000K	3107	124	>80	120-277V	-30°C (-22°F) to 50°C (122°F)	UL listed DLC Certified
FLLS-35W-50K-DV2-PC-CL-BZFM	35W	5000K	4358	125	>80	120-277V	-30°C (-22°F) to 50°C (122°F)	UL listed DLC Certified
FLLS-35W-40K-DV2-PC-CL-BZFM	35W	4000K	4310	123	>80	120-277V	-30°C (-22°F) to 50°C (122°F)	UL listed DLC Certified
FLLS-60W-50K-DV2-PC-CL-BZFM	60W	5000K	7993	133	>80	120-277V	-30°C (-22°F) to 50°C (122°F)	UL listed DLC Certified
FLLS-60W-40K-DV2-PC-CL-BZFM	60W	4000K	7881	131	>80	120-277V	-30°C (-22°F) to 50°C (122°F)	UL listed DLC Certified
FLLS-80W-50K-DV2-PC-CL-BZFM	80W	5000K	10923	137	>80	120-277V	-30°C (-22°F) to 50°C (122°F)	UL listed DLC Certified
FLLS-80W-40K-DV2-PC-CL-BZFM	80W	4000K	10744	134	>80	120-277V	-30°C (-22°F) to 50°C (122°F)	UL listed DLC Certified
FLLS-100W-50K-DV2-PC-CL-BZFM	100W	5000K	13715	134	>80	120-277V	-30°C (-22°F) to 50°C (122°F)	UL listed DLC Certified
FLLS-100W-40K-DV2-PC-CL-BZFM	100W	4000K	13541	135	>80	120-277V	-30°C (-22°F) to 50°C (122°F)	UL listed DLC Certified
FLLS-150W-50K-DV2-PC-CL-BZFM	150W	5000K	21000	140	>80	120-277V	-30°C (-22°F) to 50°C (122°F)	UL listed DLC Certified
FLLS-150W-40K-DV2-PC-CL-BZFM	150W	4000K	21000	140	>80	120-277V	-30°C (-22°F) to 50°C (122°F)	UL listed DLC Certified

## PRODUCT DIMENSIONS

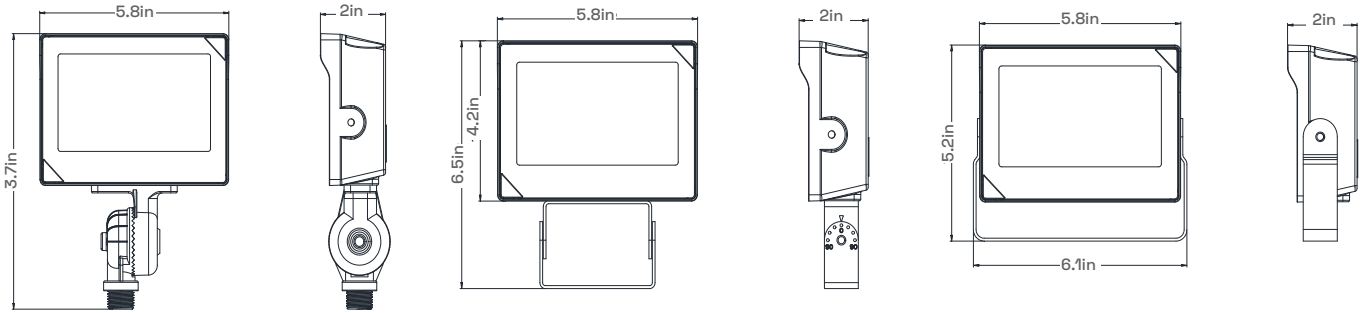

**With Universal mount**

**With Yoke mount**

**With Flush mount**

## PACKAGING DIMENSIONS

SKU #	Standard Pack	Dimension	Master Pack	W/D
FLLS-15W-50K-DV2-PC-CL-BZKM	1 Pack	L 8in x W 7.2in x H 2.6in	10 Pack	L 15.9 in x W 14.5in x H 11in
FLLS-25W-50K-DV2-PC-CL-BZKM	1 Pack	L 8in x W 7.2in x H 2.6in	10 Pack	L 15.9 in x W 14.5in x H 11in
FLLS-35W-50K-DV2-PC-CL-BZFM	1 Pack	L 9.2in x W 8.2in x H 2.7in	10 Pack	L 15.9 in x W 14.5in x H 11in
FLLS-60W-50K-DV2-PC-CL-BZFM	1 Pack	L 10.8 in x W 9.6in x H 2.9in	10 Pack	L 15.9 in x W 14.5in x H 11in
FLLS-80W-50K-DV2-PC-CL-BZFM	1 Pack	L 12.5 in x W 10.8in x H 3.3in	10 Pack	L 15.9 in x W 14.5in x H 11in
FLLS-100W-50K-DV2-PC-CL-BZFM	1 Pack	L 12.5 in x W 10.8in x H 3.3in	10 Pack	L 15.9 in x W 14.5in x H 11in
FLLS-150W-50K-DV2-PC-CL-BZFM	1 Pack	L 13.5 in x W 11.4in x H 3.5in	10 Pack	L 15.9 in x W 14.5in x H 11in

## ACCESSORIES



FLL-KM - Universal mount



FLL-YM - Yoke mount



FLL-AM - Slip-fitter mount




FLL-FM - Flush mount

## PHOTOMETRICS

Model No: FLLS-80W (277V)

### Luminous Intensity Distribution Curve

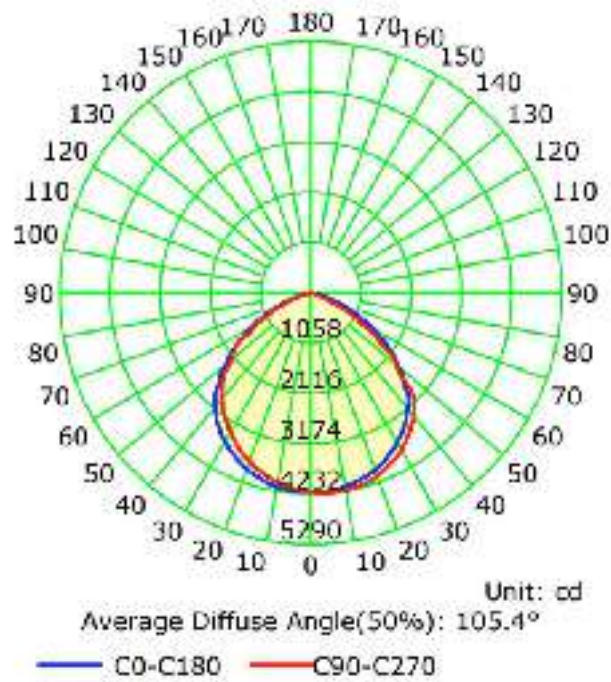

Note: Additional Photometrics Available Online