



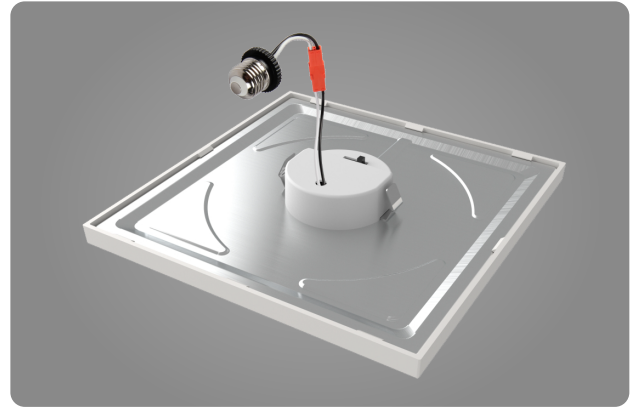

LED Square Surface Downlight

DATE: _____ LOCATION: _____
 TYPE: _____ PROJECT: _____
 CONSTRUCTION: _____

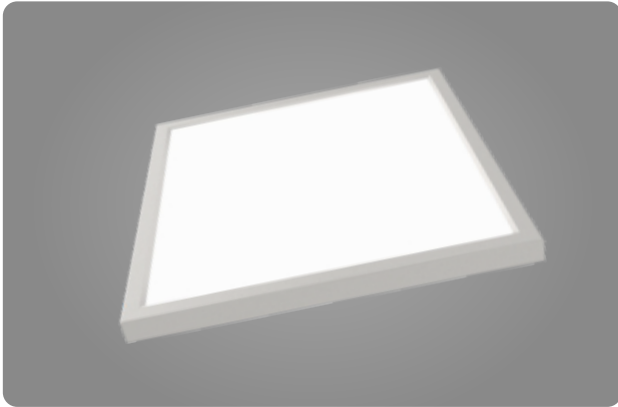

IC RATED



DAMP LOCATIONS



PERFORMANCE FEATURES

CETLUS Rated

Suitable for Damp locations

Energy Star Rated

5 Color Temperature Selectable

2700K - 5000K

Dimming

Seamless and smooth dimming capabilities from 10% to 100% that fit any mood or decor

Installation Methods

Surface Mount & E26 Retrofit Can Installation

Application

Living Room, Bedrooms, Kitchen, Hallway, Basement and offices.


SKU GUIDE

Model Section		DLS4-9W-CCT-DV1-F-WH					
DLS4		10W	CCT	DV1		F	WH
BODY TYPE PREFIX	MODEL NAME	WATTAGE	CCT (if selectable = CCT)	DRIVER	VOLTAGE	ELECTRICAL OPTIC/LENS	HOUSING FINISH
DLS	4 - 4 inch 7 - 7 inch	9W 12W	CCT - 5 CCT Selectable (2700K-5000K)	D - Triac Dimming	V1 - 120	F-Frosted Lens	WH- White Finish

SKU SPECIFICATION

SKU #	Nominal Wattage	CCT	Lumens	Efficacy (LPW)	CRI	Input Voltage	Operating Temp.	Certifications
DLS4-9W-CCT-DV1-NA-F-WH	9W	2700K 3000K 3500K 4000K 5000K	700	70	>80	120	TBD	CETLUS Rated, Energy Star, IC Rated
DLS7-12W-CCT-DV1-NA-F-WH	12W	2700K 3000K 3500K 4000K 5000K	1000	77	>80	120	TBD	CETLUS Rated, Energy Star, IC Rated

PRODUCT DIMENSIONS

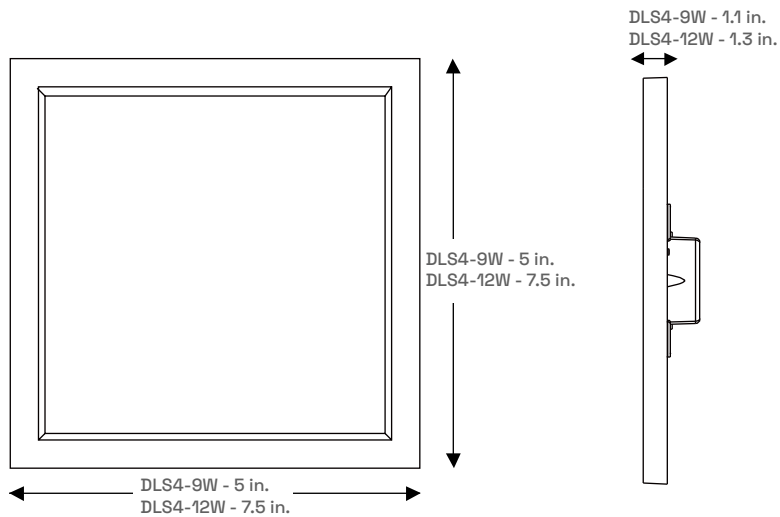

PACKAGING DIMENSIONS

SKU #	Standard Pack	Dimension	Master Pack	W/D
DLS4-9W-CCT-DV1-NA-F-WH	1 Pack	L 6.1in x W 1.8in x H 5.2in	40 Pack	L 20.2 in x W 12.8in x H 11.2in
DLS7-12W-CCT-DV1-NA-F-WH	1 Pack	L 7.6 in x W 1.9in x H 7.6in	40 Pack	L 16.1 in x W 16.1in x H 20.0in

INSTALLATION

