

DAMP LOCATIONS



PERFORMANCE FEATURES

CETLUS Rated

Suitable for Damp locations

5 Color Temperature Selectable

2700K - 5000K

Energy Star Rated

Dimming

Seamless and smooth dimming capabilities from 10% to 100% that fit any mood or decor

Installation Methods

Surface Mount & E26 Retrofit Can Installation

Application

Living Room, Bedrooms, Kitchen, Hallway, Basement and offices.


SKU GUIDE

Model Section		RDLR4-9W-CCT-DV1-F-WH					
RDLR4		9W	CCT	DV1		F	WH
BODY TYPE PREFIX	MODEL NAME	WATTAGE	CCT (if selectable = CCT)	DRIVER	VOLTAGE	ELECTRICAL OPTIC/LENS	HOUSING FINISH
RDLR	4 - 4 inch 6 - 6 inch	9W 12W	CCT - 5 CCT Selectable (2700K-5000K)	D - Triac Dimming	V1 - 120	F-Frosted Lens	WH- White Finish

SKU SPECIFICATION

SKU #	Nominal Wattage	CCT	Lumens	Efficacy (LPW)	CRI	Input Voltage	Operating Temp.	Certifications
RDLR4-9W-CCT-DV1-NA-F-WH	9W	2700K 3000K 3500K 4000K 5000K	600	67	>80	120	TBD	CETLUS Rated, Energy Star, IC Rated
RDLR6-12W-CCT-DV1-NA-F-WH	12W	2700K 3000K 3500K 4000K 5000K	900	75	>80	120	TBD	CETLUS Rated, Energy Star, IC Rated

PRODUCT DIMENSIONS

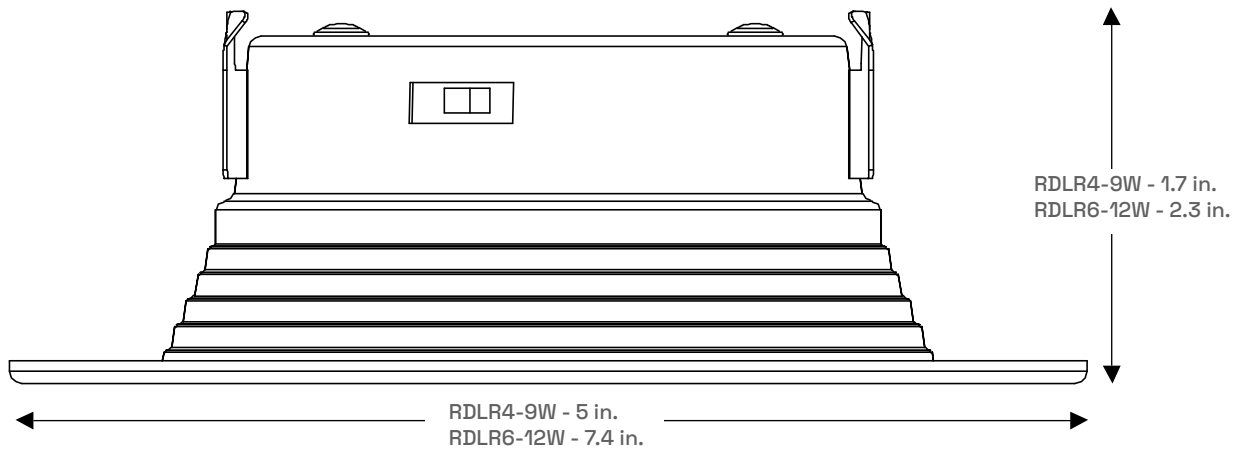

PACKAGING DIMENSIONS

SKU #	Standard Pack	Dimension	Master Pack	W/D
RDLR4-9W-CCT-DV1-NA-F-WH	1 Pack	L 5.5 in x W 2.7in x H 5.5in	40 Pack	L 22.8 in x W 11.8in x H 14.5in
RDLR6-12W-CCT-DV1-NA-F-WH	1 Pack	L 7.8 in x W 3.5in x H 7.8in	30 Pack	L 24.4 in x W 16.5in x H 18.5in

INSTALLATION

